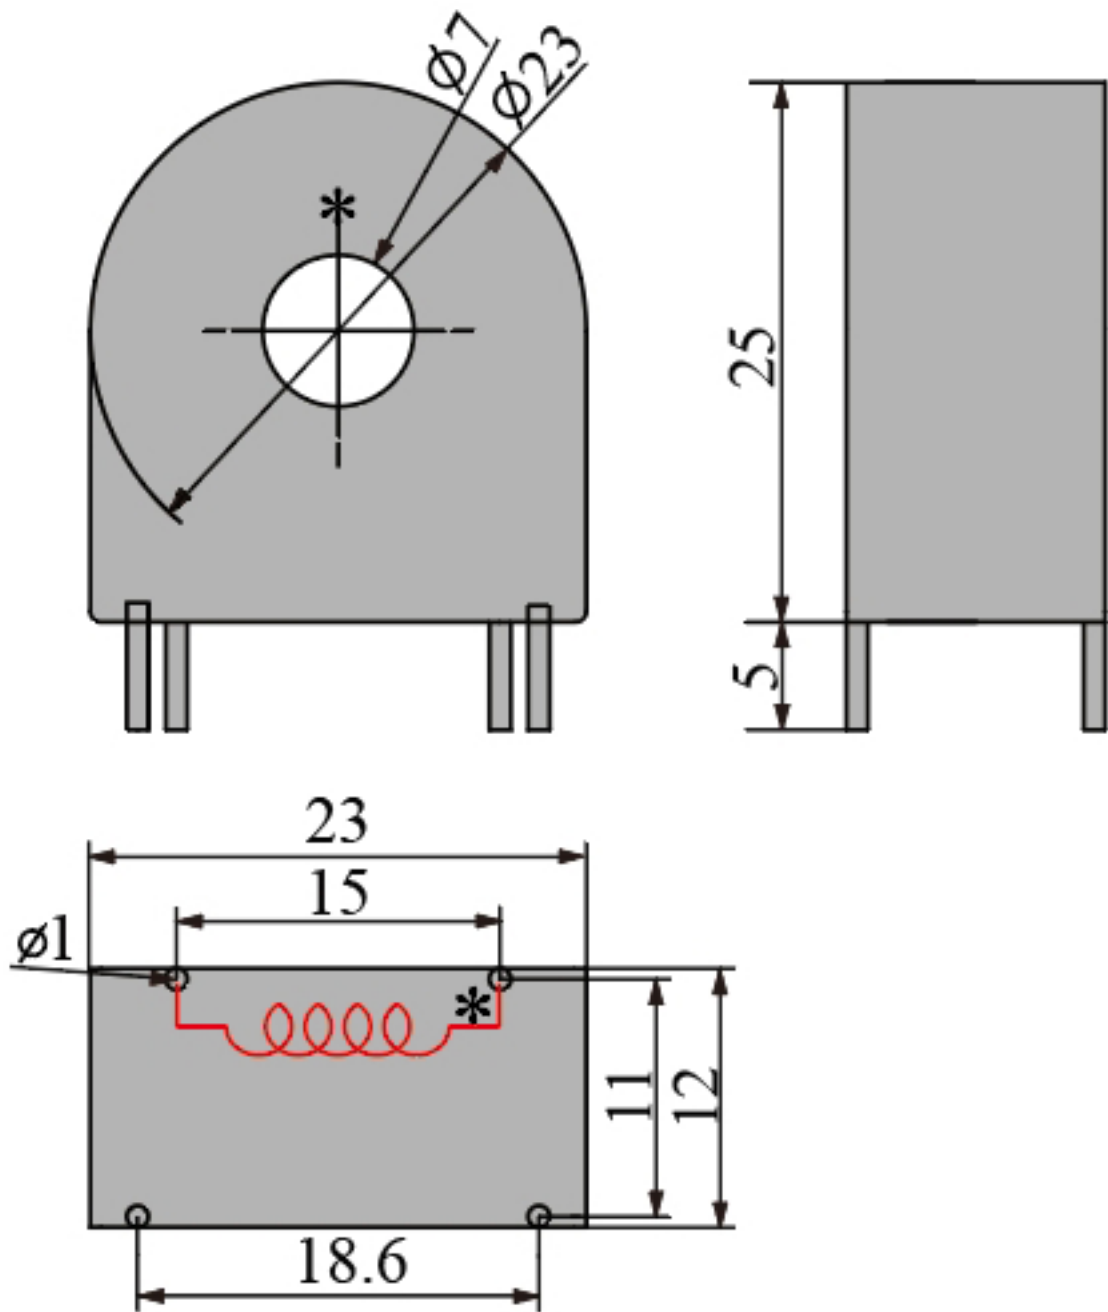
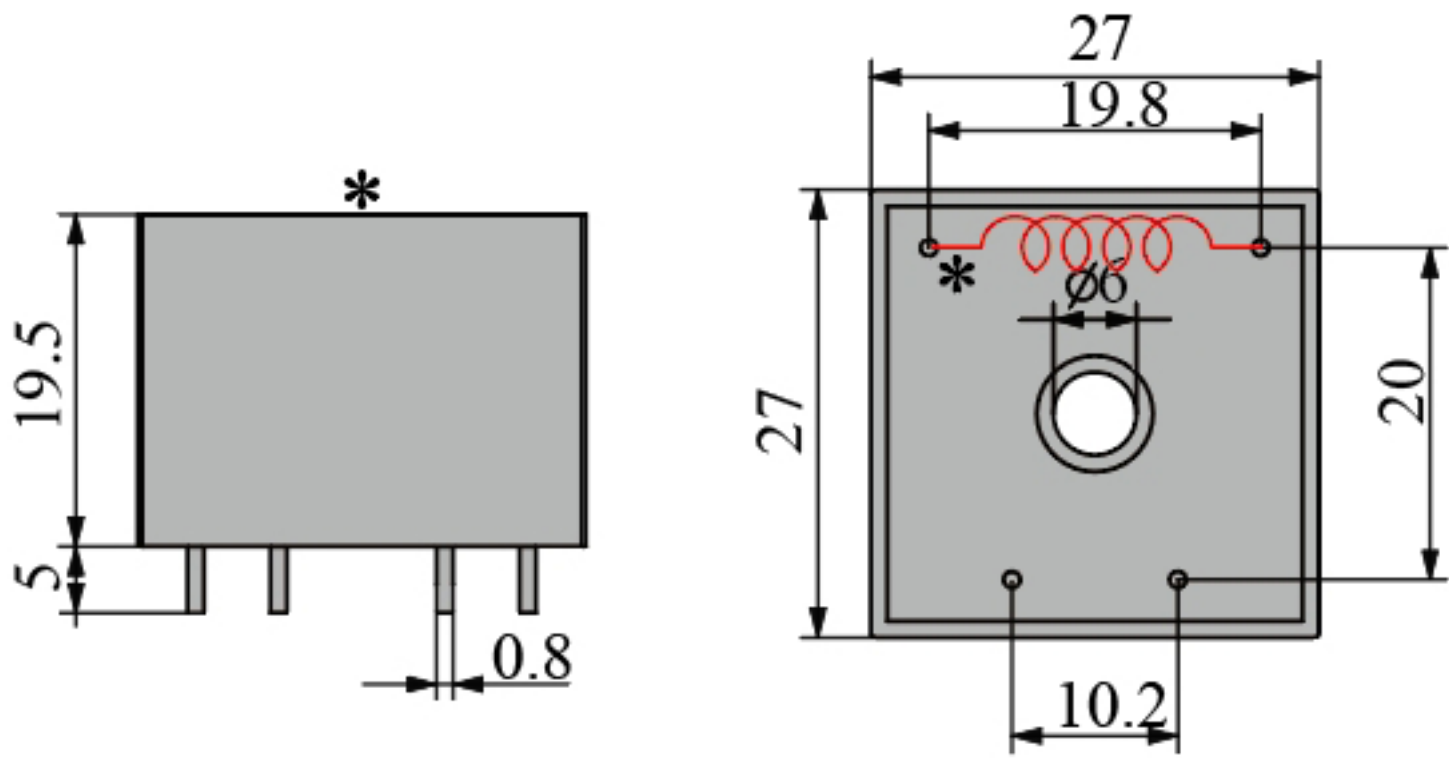


产品型号	CT221461				
额定输入	5A	5A	10A	10A	20A
额定输出	2.5mA	5mA	5mA	10mA	10mA
推荐负载	200Ω	100Ω	200Ω	100Ω	100Ω
精度等级	0.1	0.1	0.1	0.1	0.1
外形尺寸					

产品型号	CT221561				
额定输入	5A	10A	10A	20A	100A
额定输出	2.5mA	5mA	10mA	10mA	40mA
推荐负载	200Ω	200Ω	200Ω	200Ω	100Ω
精度等级	0.1	0.1	0.1	0.1	0.1
外形尺寸	 The technical drawing illustrates the physical dimensions of the CT221561 transducer. The side view (left) shows a rectangular body with a height of 19.5 mm and a base thickness of 5 mm. The mounting pins at the base have a diameter of 0.8 mm. The front view (right) shows a square face with a side length of 27 mm. A central circular feature has a diameter of 6 mm (labeled as Ø6). The distance between the two top mounting points is 19.8 mm, and the distance between the two bottom mounting points is 10.2 mm. A red spiral line indicates the internal coil winding. An asterisk (*) marks the top surface of the device.				