
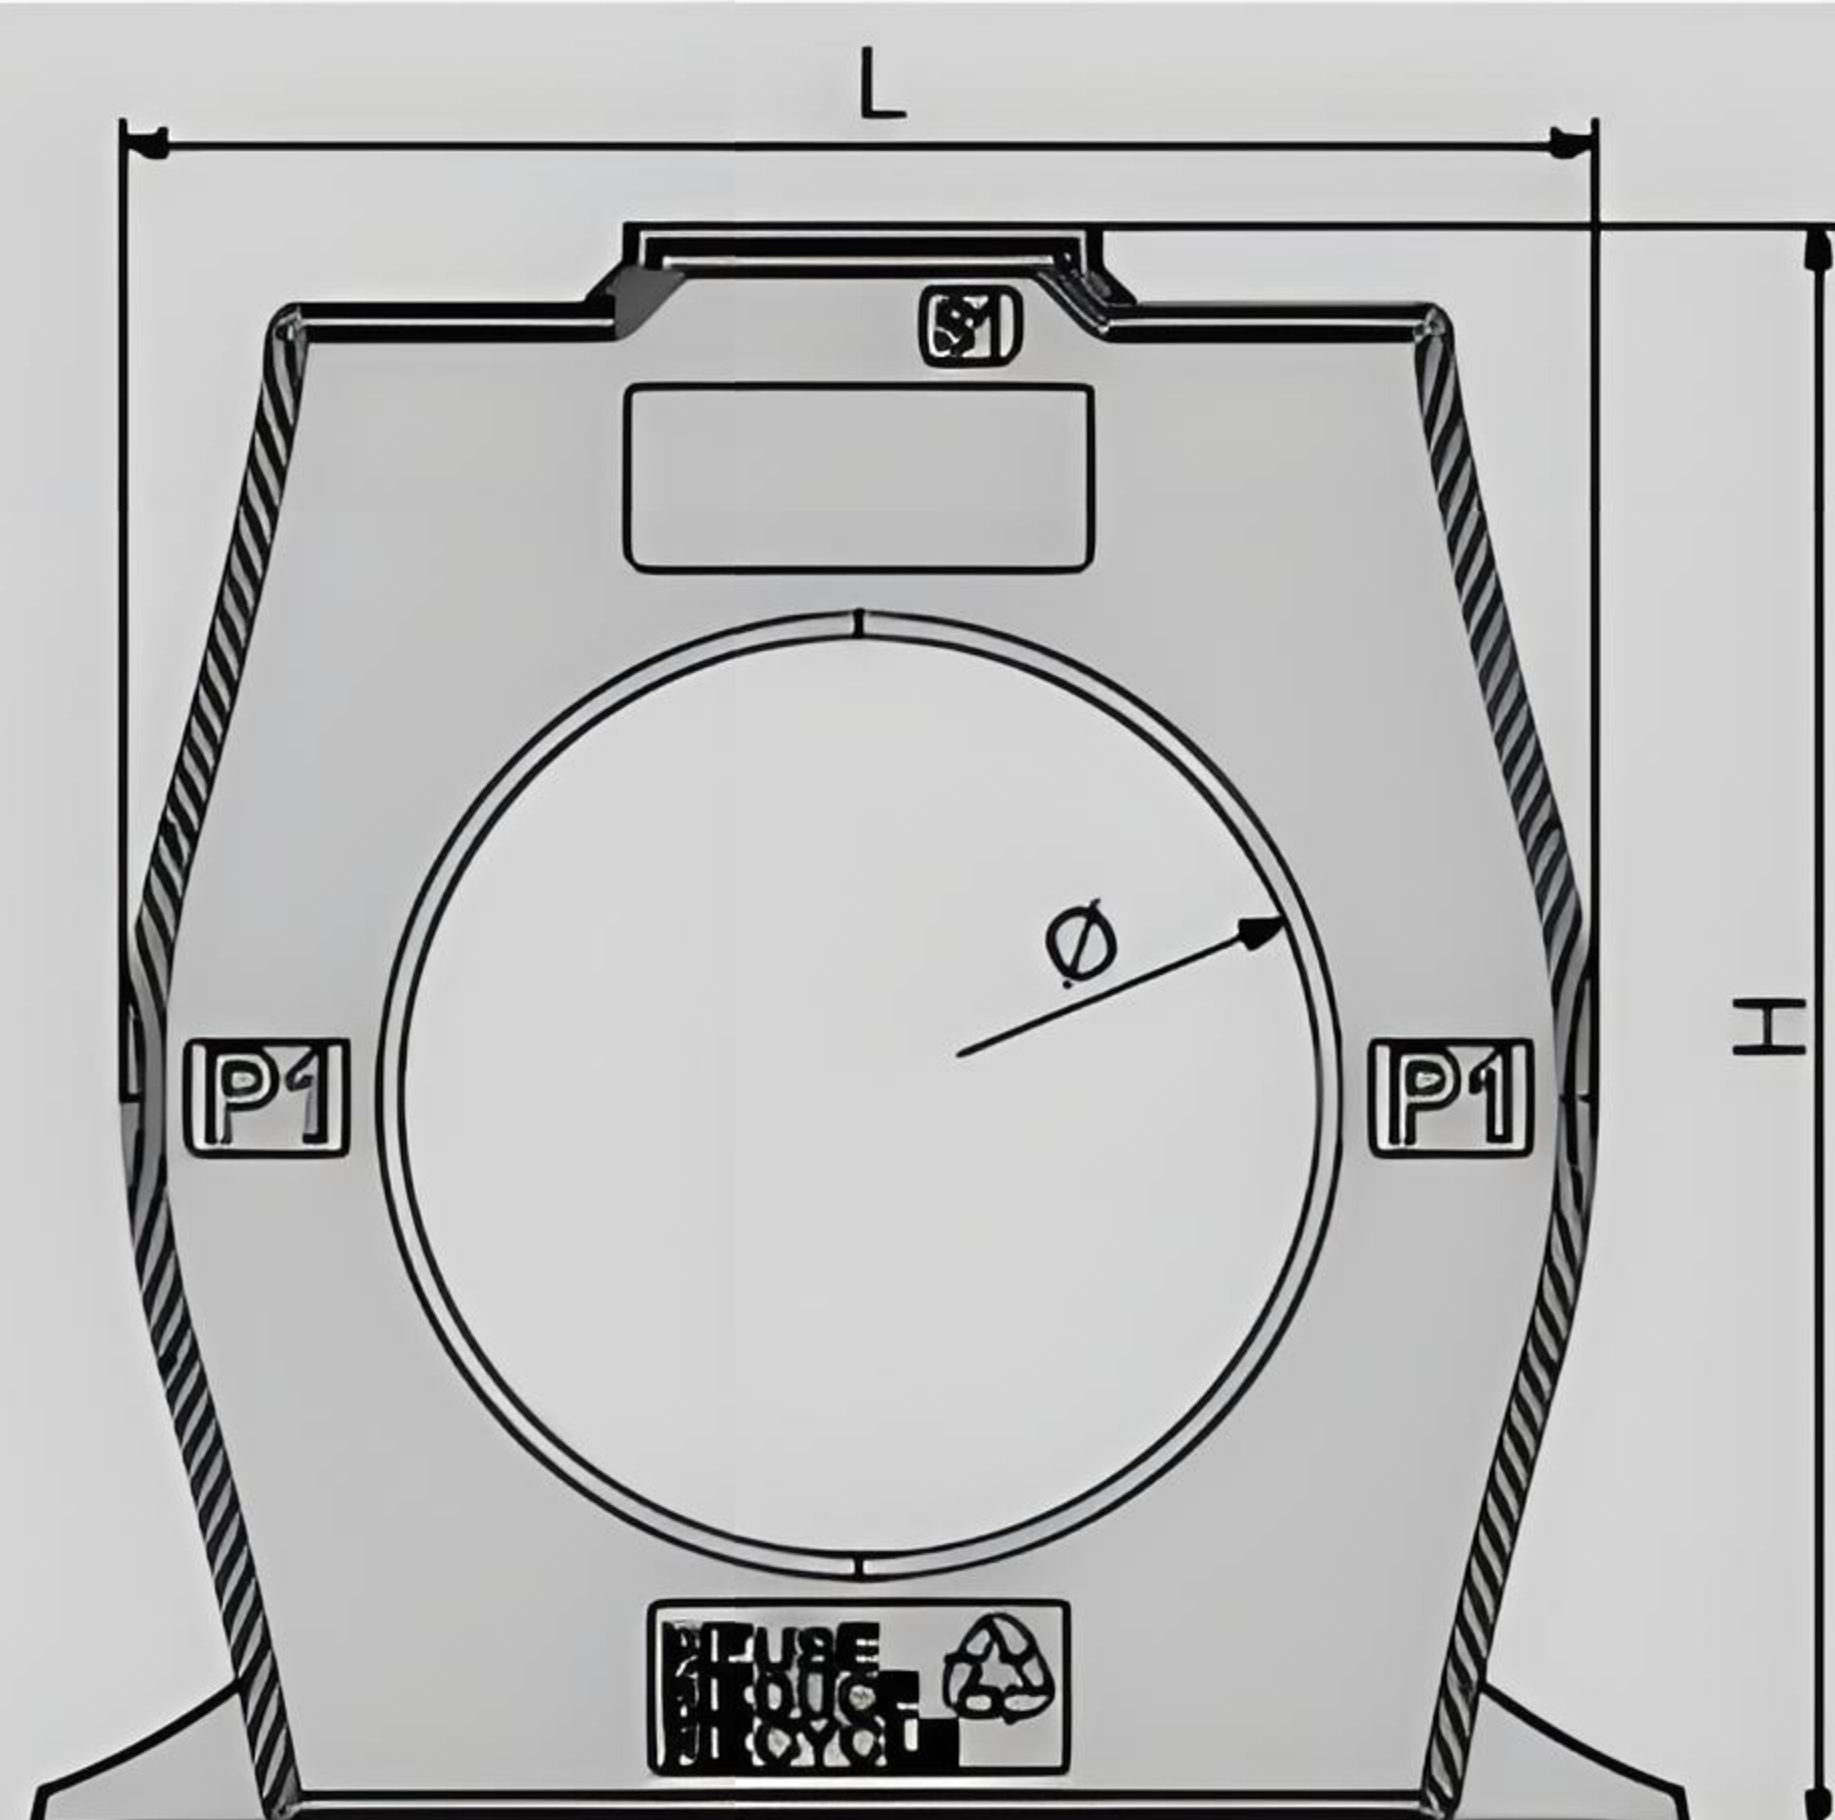


产品从外壳顶部的端子台输出，较少的占用产品的高度，实现了方便接线的目的，在安装的时候，固定好互感器再接线更为便利。且减小了产品的厚度。

- 规格品种多, 适用电流范围大
- 两种固定方式、固定方式可靠、灵活
- 设计灵活、可测量、保护兼用
- 精度高: 精度可达到 0.1 级
- 过载倍数高、小信号输出最高可达 12 倍。
- 通用性强、互换性好

## 产品规格对应表

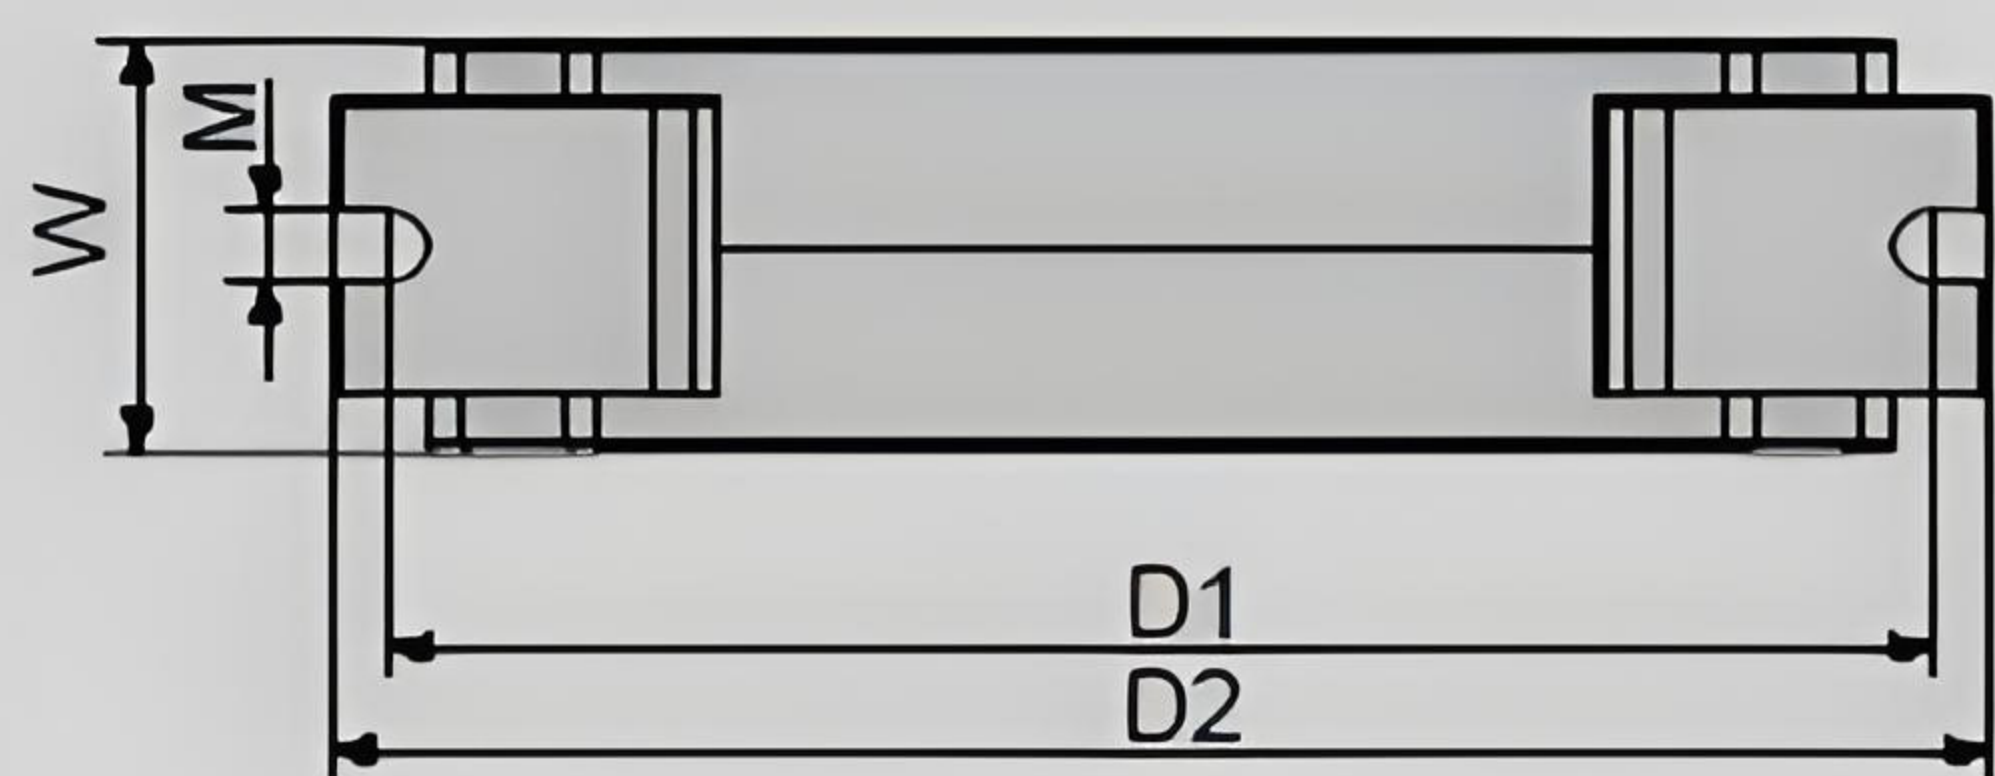

| 规格型号     | 典型参数       |        | 精度等级 | 过载倍数 | 外形尺寸 |     |    |     | 安装尺寸  |       |   |
|----------|------------|--------|------|------|------|-----|----|-----|-------|-------|---|
|          |            |        |      |      | Ø    | L   | W  | H   | D1    | D2    | M |
| CT213103 | 50A/20mA   | RL=20Ω | 0.1  | 1.2  | 30   | 65  | 32 | 75  | 67.5  | 75.5  | 6 |
|          | 100A/50mA  | RL=20Ω | 0.1  | 1.2  |      |     |    |     |       |       |   |
|          | 200A/50mA  | RL=20Ω | 0.1  | 1.2  |      |     |    |     |       |       |   |
| CT213203 | 100A/50mA  | RL=20Ω | 0.1  | 1.2  | 46   | 85  | 32 | 94  | 88.5  | 100.5 | 6 |
|          | 200A/50mA  | RL=20Ω | 0.1  | 1.2  |      |     |    |     |       |       |   |
|          | 400A/200mA | RL=20Ω | 0.1  | 1.2  |      |     |    |     |       |       |   |
| CT213303 | 200A/50mA  | RL=20Ω | 0.1  | 1.2  | 65   | 108 | 32 | 120 | 108.5 | 122.5 | 6 |
|          | 400A/200mA | RL=20Ω | 0.1  | 1.2  |      |     |    |     |       |       |   |
|          | 600A/200mA | RL=20Ω | 0.1  | 1.2  |      |     |    |     |       |       |   |
| CT213403 | 200A/50mA  | RL=20Ω | 0.1  | 1.2  | 80   | 128 | 36 | 140 | 134   | 144   | 6 |
|          | 500A/200mA | RL=20Ω | 0.1  | 1.2  |      |     |    |     |       |       |   |
|          | 1000A/1A   | RL=5Ω  | 0.5  | 1.2  |      |     |    |     |       |       |   |
| CT213503 | 500A/1A    | RL=5Ω  | 0.5  | 1.2  | 100  | 150 | 36 | 162 | 152   | 172.5 | 6 |
|          | 1000A/1A   | RL=5Ω  | 0.5  | 1.2  |      |     |    |     |       |       |   |
|          | 1500A/1A   | RL=5Ω  | 0.5  | 1.2  |      |     |    |     |       |       |   |
| CT213603 | 1000A/1A   | RL=5Ω  | 0.5  | 1.2  | 120  | 172 | 36 | 184 | 177   | 197   | 6 |
|          | 1500A/1A   | RL=5Ω  | 0.5  | 1.2  |      |     |    |     |       |       |   |
|          | 3000A/1A   | RL=20Ω | 0.5  | 1.2  |      |     |    |     |       |       |   |