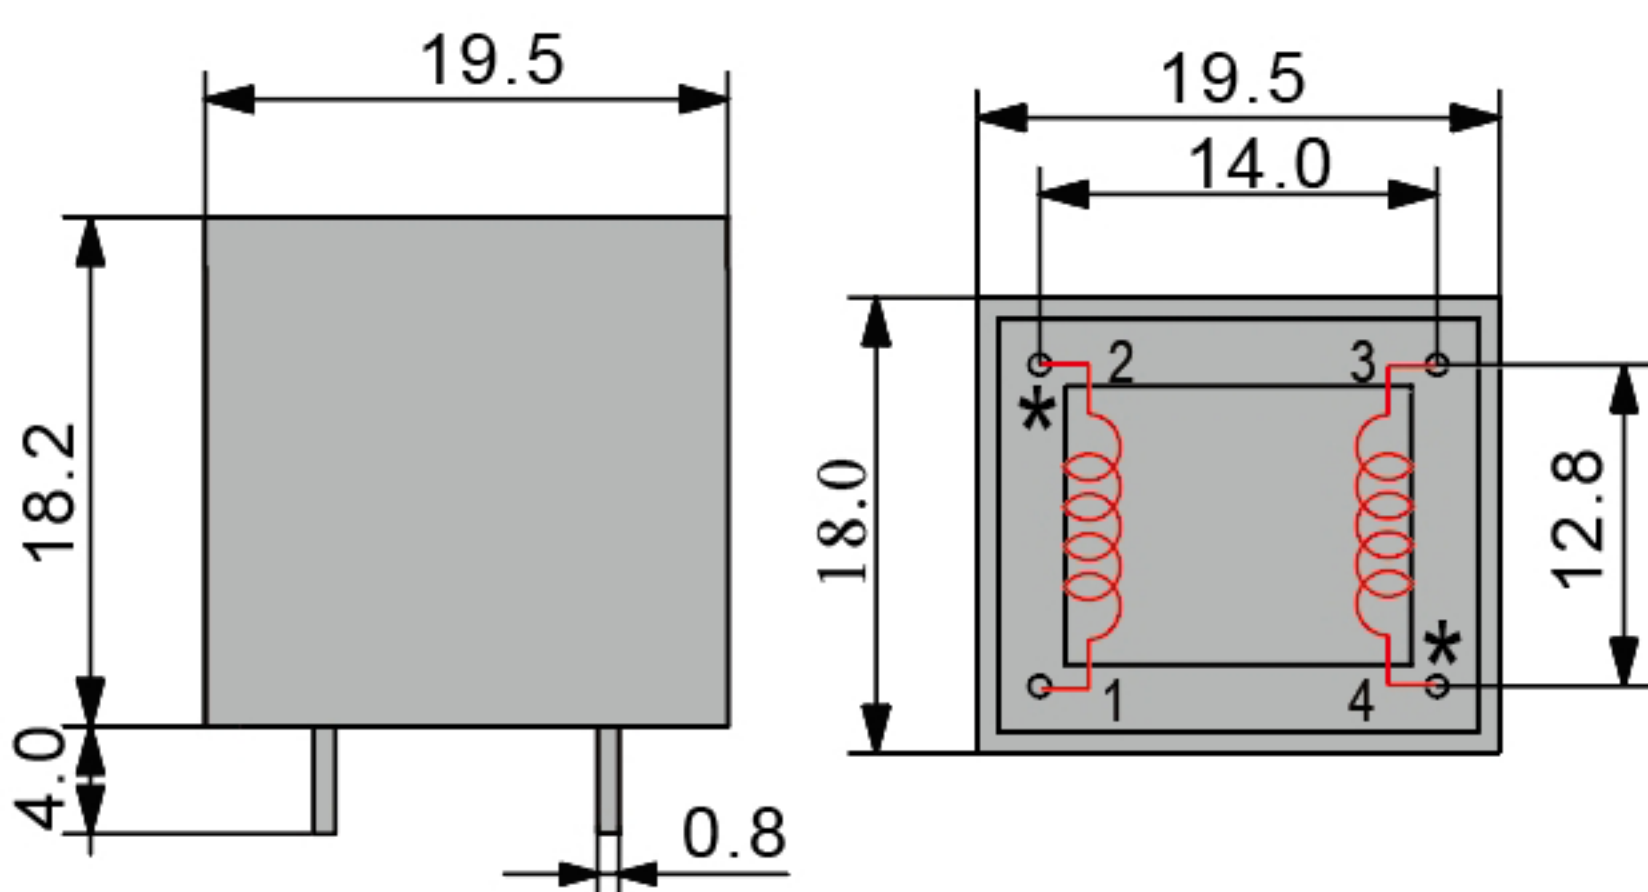
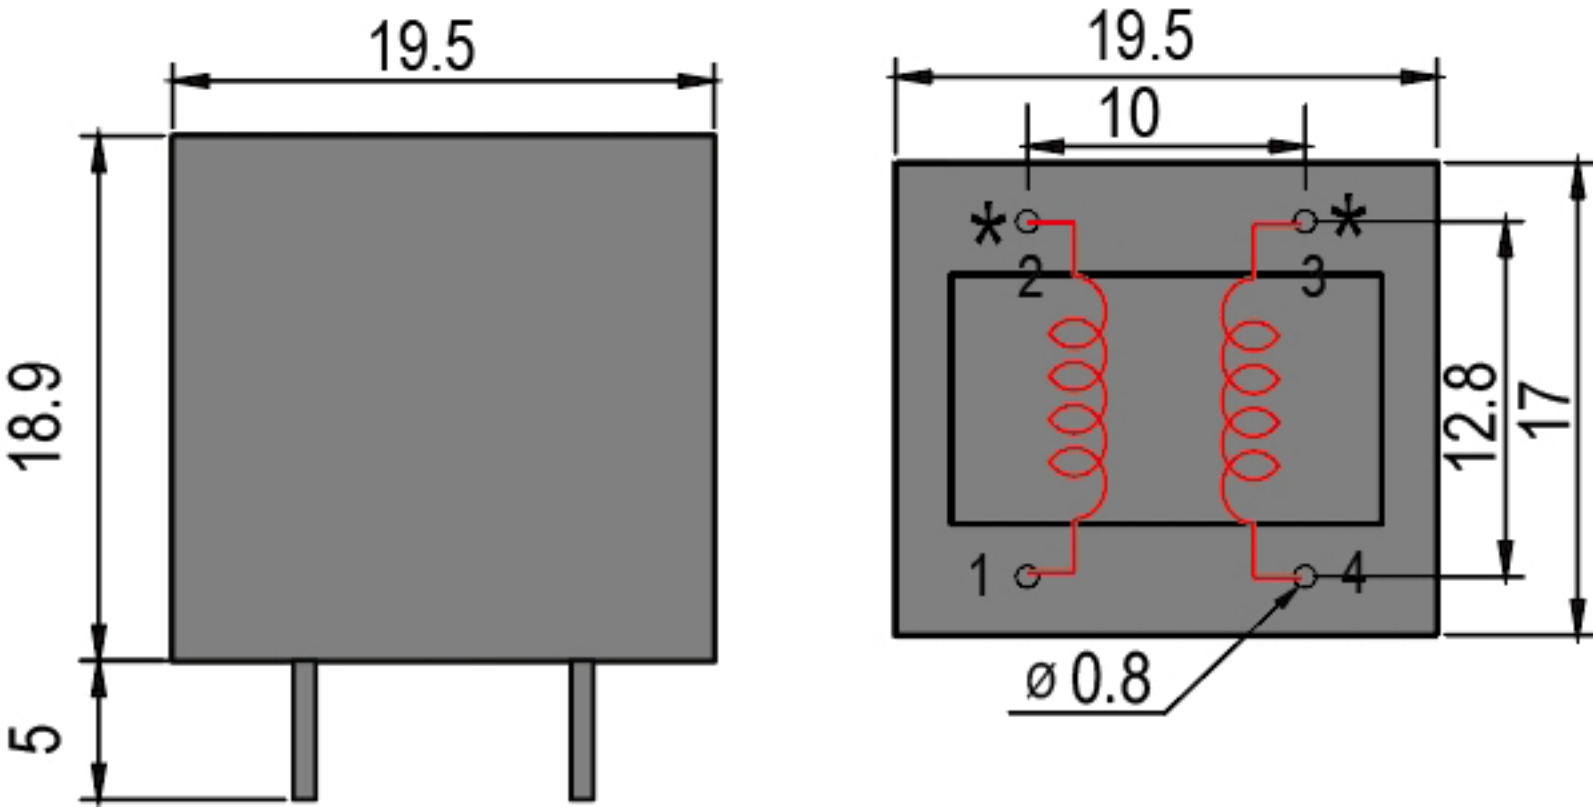


产品型号	PT232161	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT232161 sensor. The front view (left) shows a rectangular component with a width of 19.5 and a height of 18.2. It features two mounting pins at the bottom, with a pin diameter of 0.8 and a base thickness of 4.0. The top view (right) shows the same component from above, with a width of 19.5 and a height of 12.8. The internal layout includes a central square area with a width of 14.0. Four terminals are labeled 1, 2, 3, and 4, with terminals 2 and 3 marked with an asterisk (*). The distance between the terminals is 18.0.	

产品型号	PT232361	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 500\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT232361 sensor. The front view (left) shows a rectangular component with a width of 19.5 and a height of 18.9. Two mounting pins are shown at the bottom, with a distance of 5 between their centers. The top view (right) shows the same component from above, with a width of 19.5 and a height of 17. The internal layout includes two coils, with terminals 1, 2, 3, and 4 labeled. The distance between the centers of the coils is 10. The distance from the top edge to the center of the coils is 12.8. The diameter of the mounting holes is indicated as $\varnothing 0.8$.	