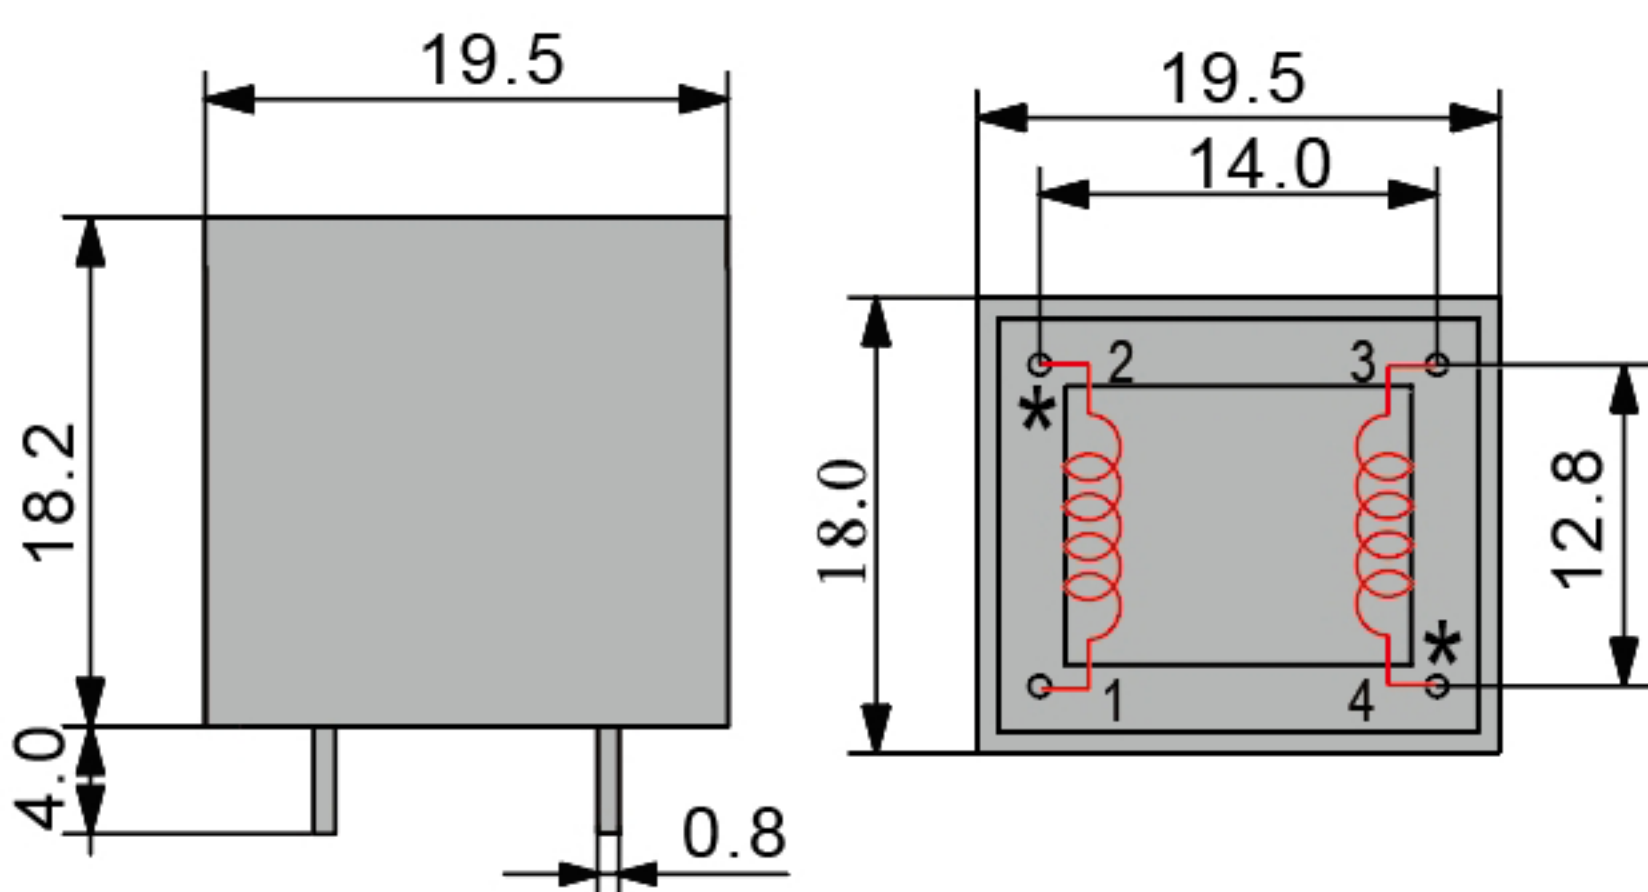
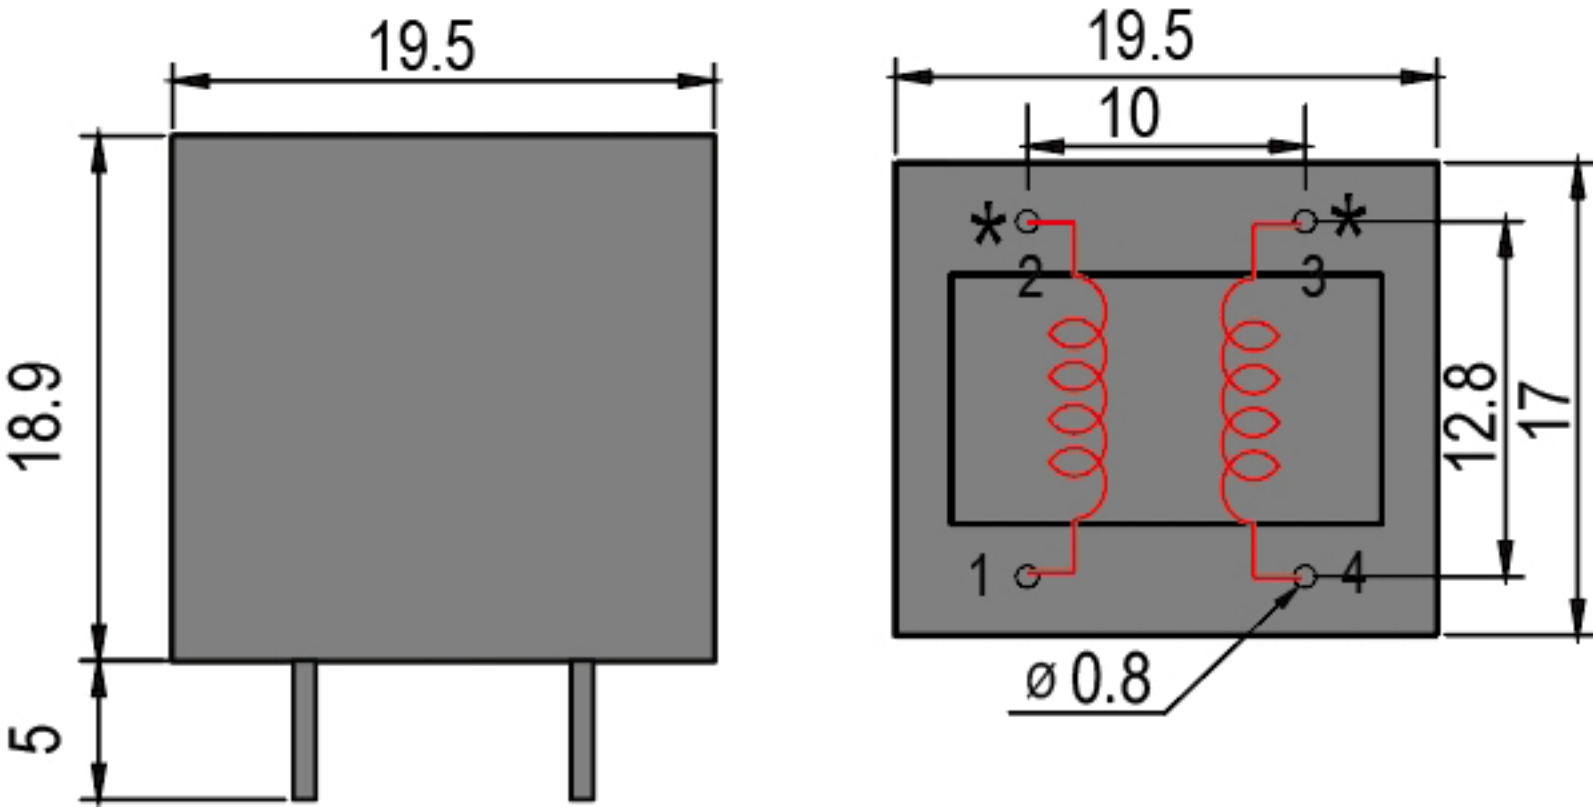
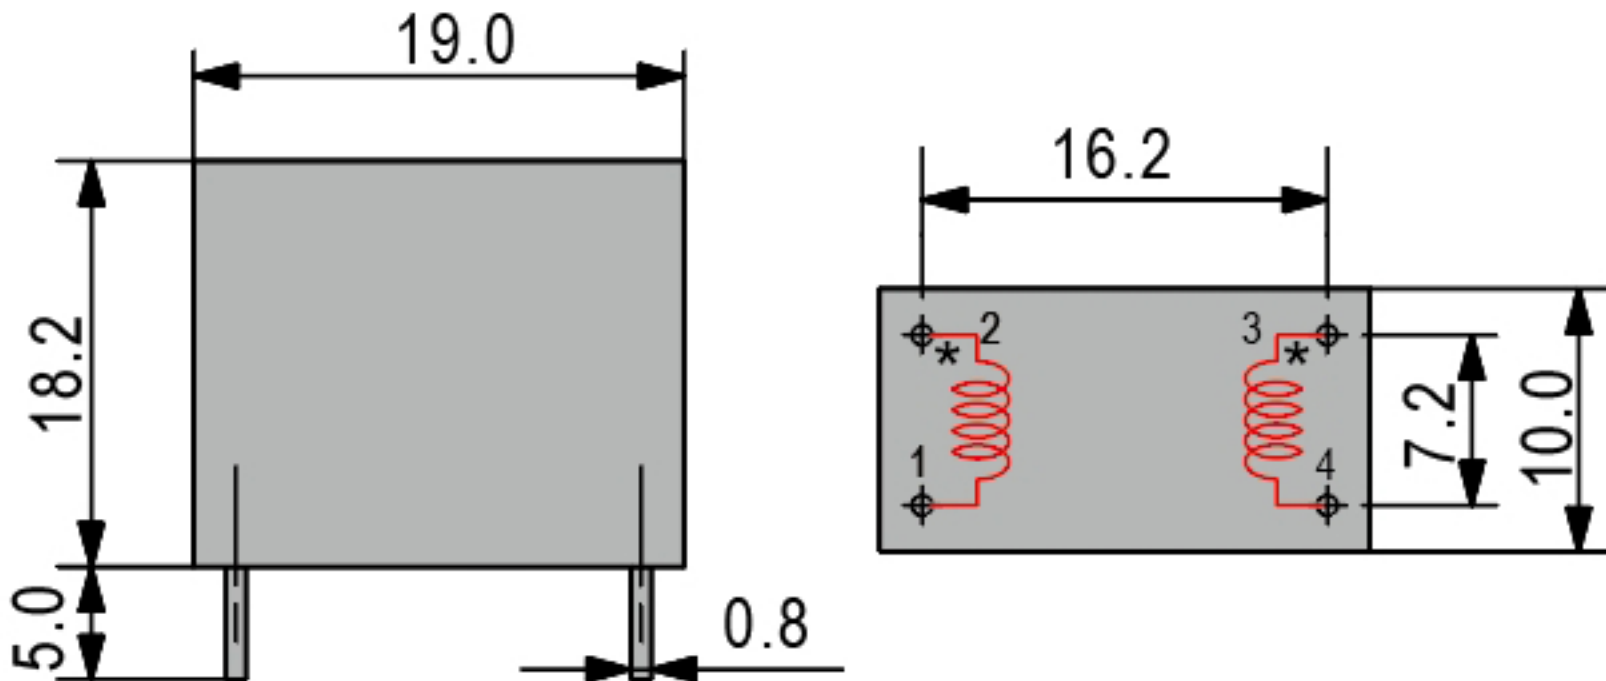
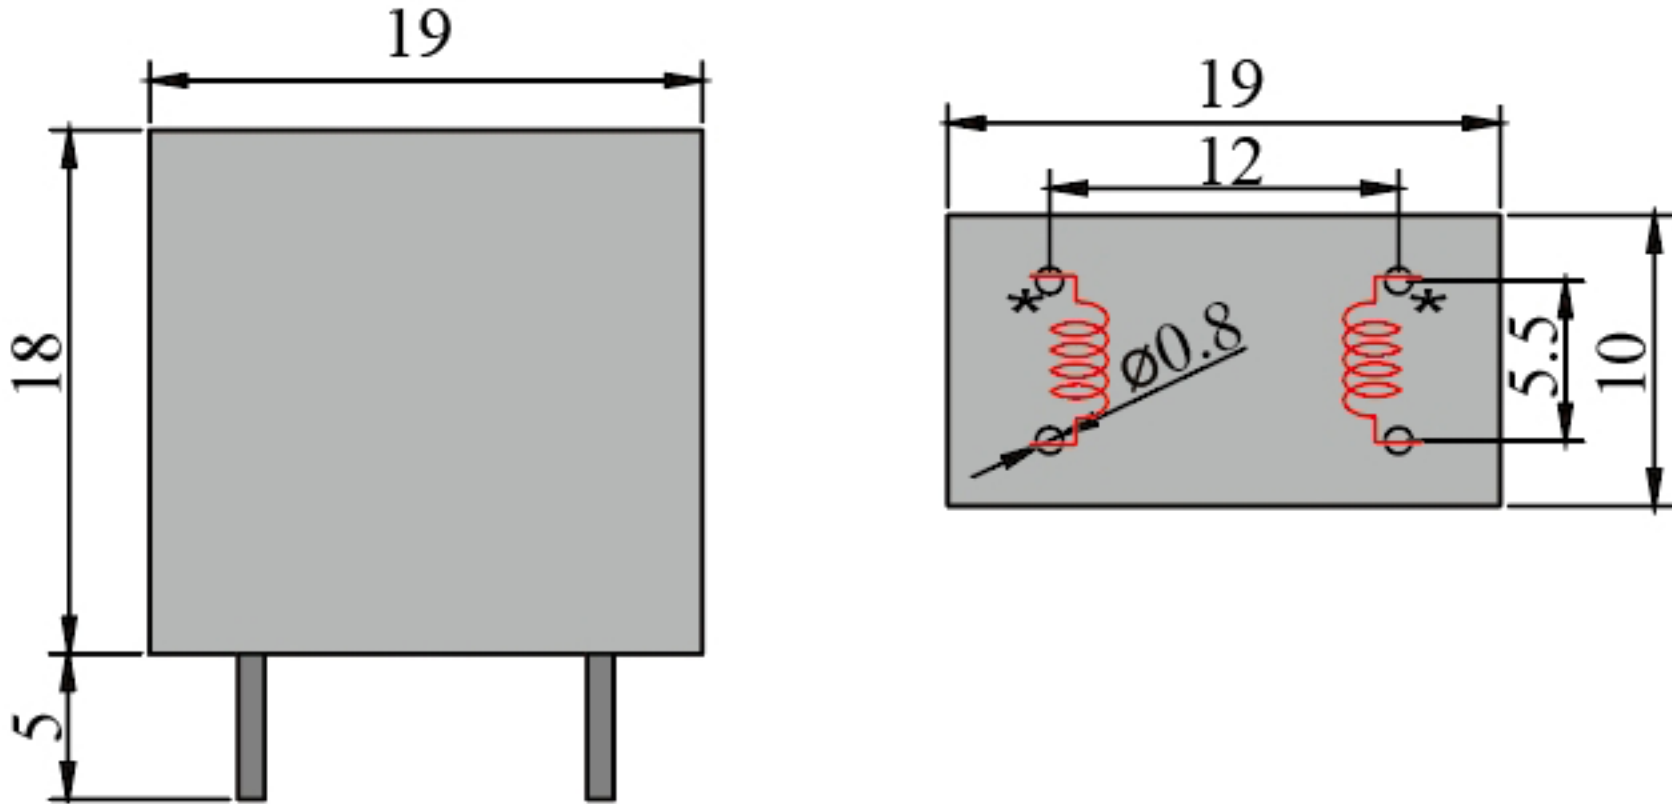
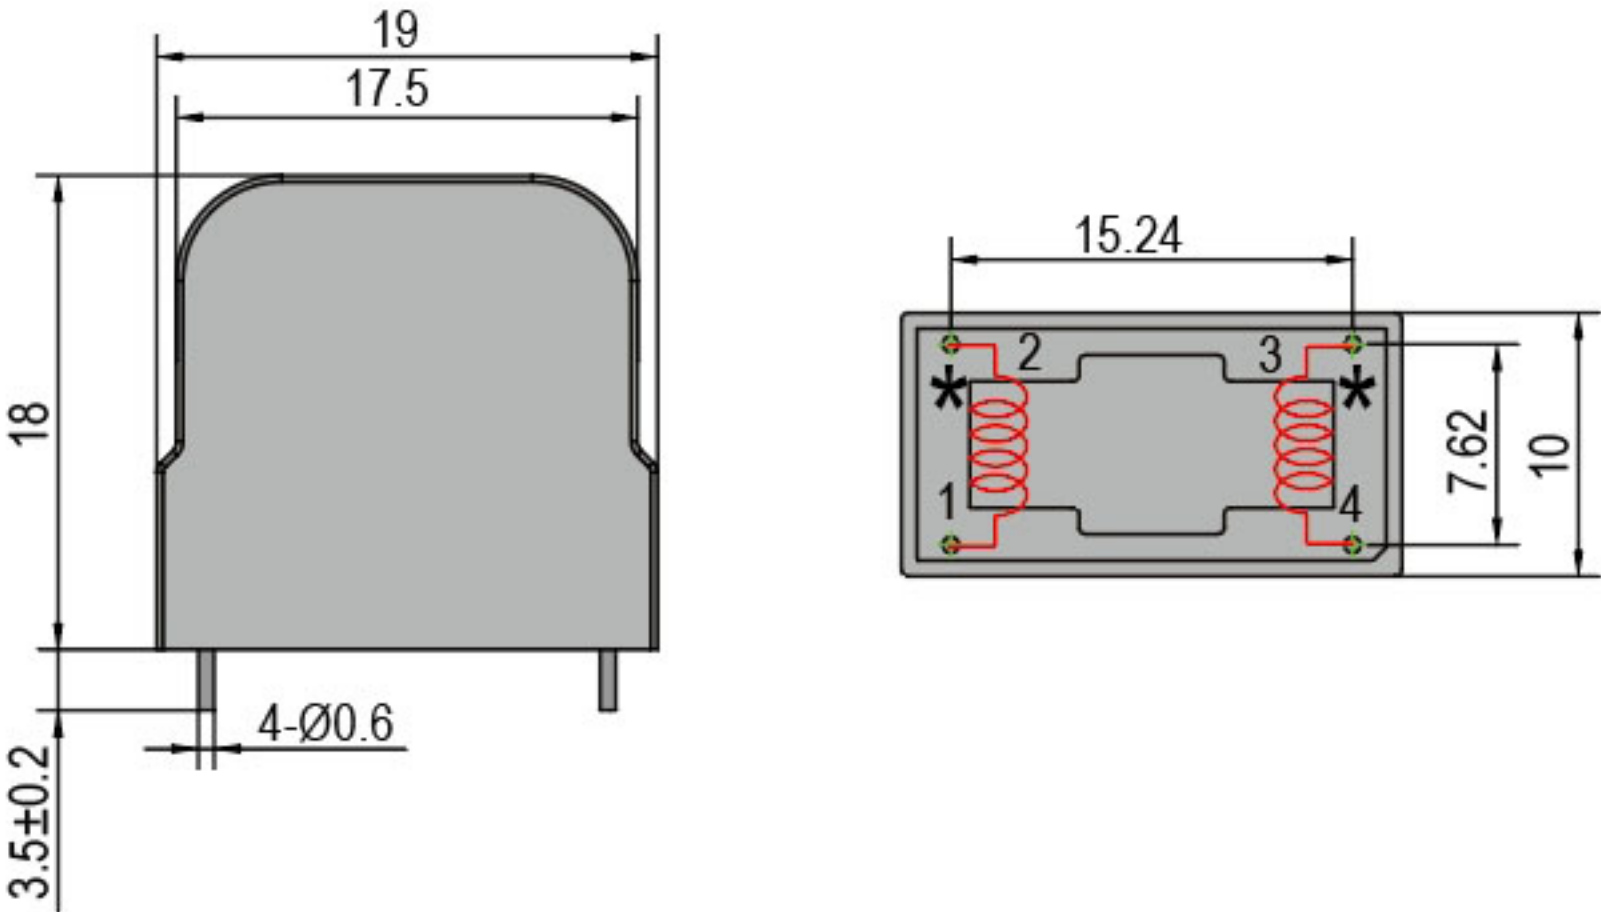


产品型号	PT232161	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT232161 sensor. The front view (left) shows a rectangular component with a width of 19.5 and a height of 18.2. It features two mounting pins at the bottom, with a pin diameter of 0.8 and a base thickness of 4.0. The top view (right) shows the same component from above, with a width of 19.5 and a height of 12.8. The internal layout includes a central square area with a width of 14.0. Four terminals are labeled 1, 2, 3, and 4, with terminals 2 and 3 marked with an asterisk (*). The distance between the terminals is 18.0.	

产品型号	PT232361	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 500\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT232361 sensor. The front view (left) shows a rectangular component with a width of 19.5 and a height of 18.9. Two mounting pins are located at the bottom, with a distance of 5 between their centers. The top view (right) shows the same component from above, with a width of 19.5 and a height of 17. The internal layout includes two coils, each with four turns, connected to four terminals labeled 1, 2, 3, and 4. The distance between the centers of the two coils is 10. The distance from the top edge to the center of the left coil is 12.8. The diameter of the mounting holes is indicated as $\varnothing 0.8$. The terminals 1 and 2 are on the left, and 3 and 4 are on the right. The terminals 1 and 3 are marked with an asterisk (*).	

产品型号	PT232461	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT232461 sensor. The front view (left) shows a rectangular component with a width of 19.0 and a height of 18.2. It features two mounting pins at the base, each with a diameter of 0.8 and a height of 5.0. The side view (right) shows the component's profile with a width of 16.2, a total height of 10.0, and a mounting pin height of 7.2. Internal wiring is depicted in red, with terminals labeled 1, 2, 3, and 4, and a central star symbol indicating a specific connection point.	

产品型号	PT232561	
额定输入	1 mA	2mA
额定输出	1 mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸		

产品型号	PT232661	
额定输入	1 mA	2mA
额定输出	1 mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 Technical drawing of the PT232661 sensor showing front and top views with dimensions. Front View Dimensions: - Overall width: 19 - Internal width: 17.5 - Overall height: 18 - Mounting hole diameter: 4-Ø0.6 - Bottom flange height: 3.5±0.2 Top View Dimensions: - Overall length: 15.24 - Internal length: 7.62 - Overall width: 10 The top view also shows the internal coil structure with terminals labeled 1, 2, 3, and 4, and asterisks indicating specific features.	