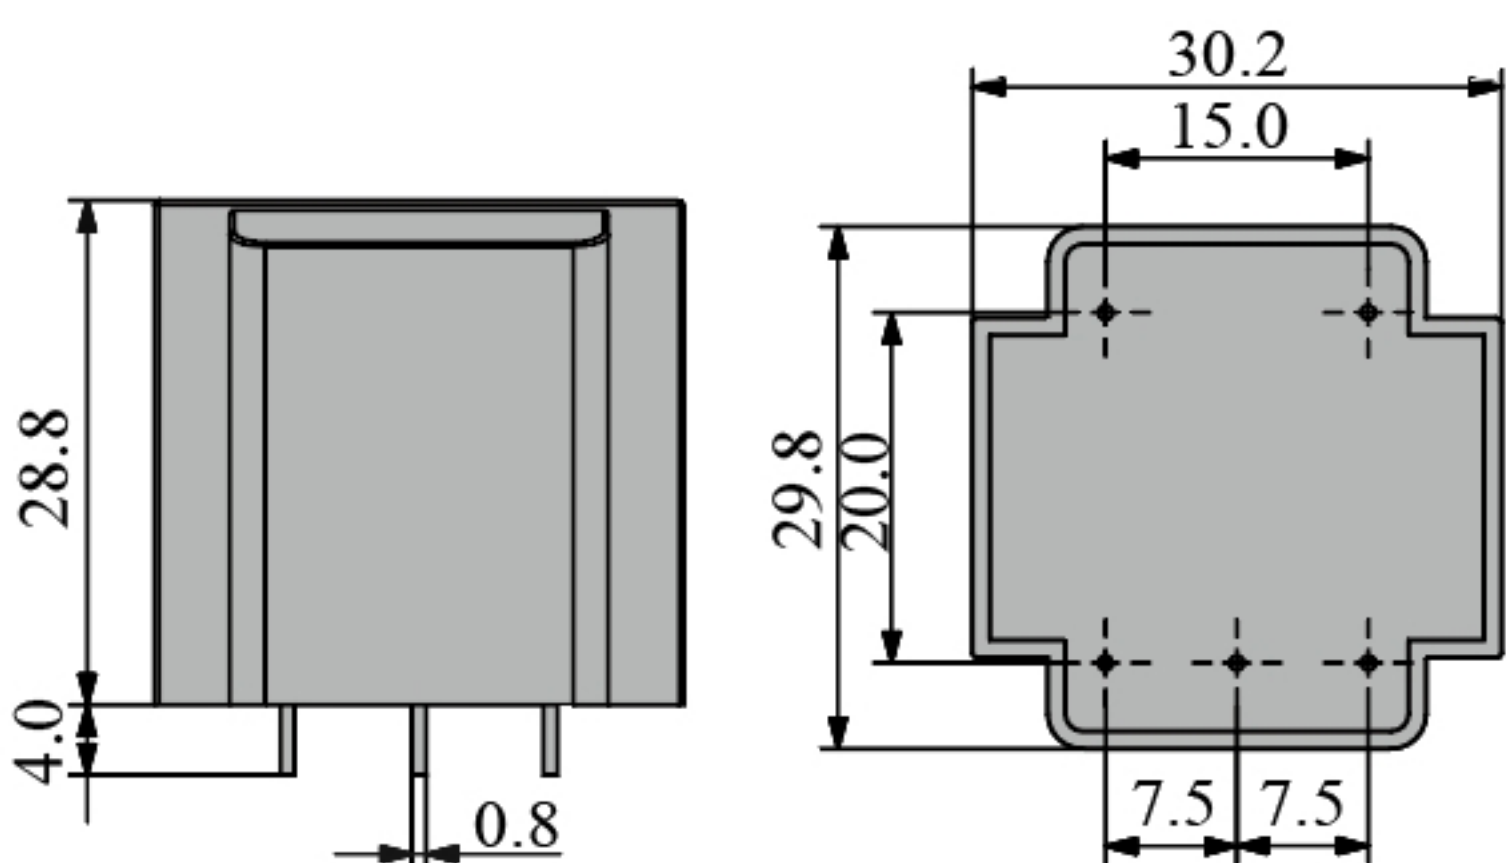
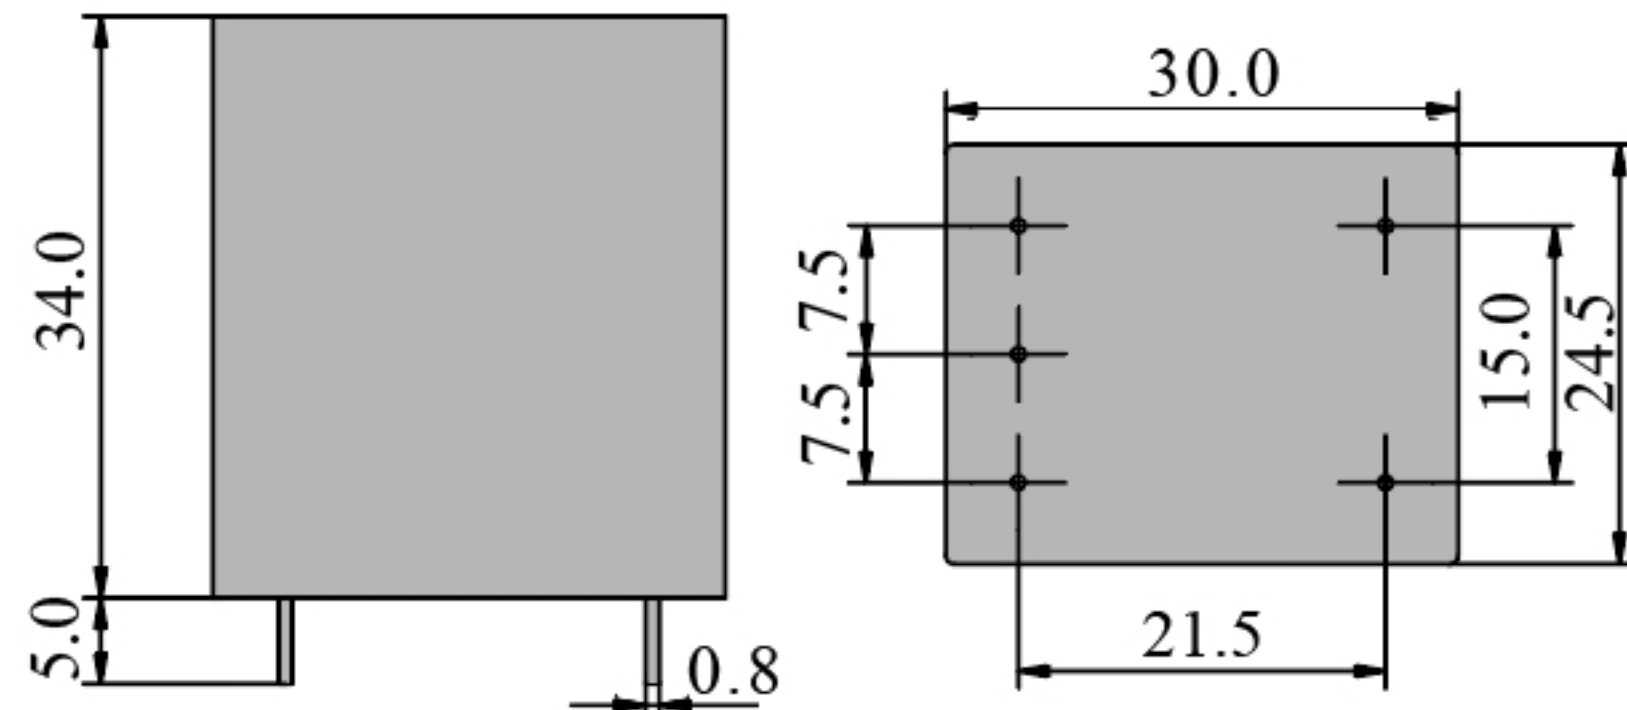
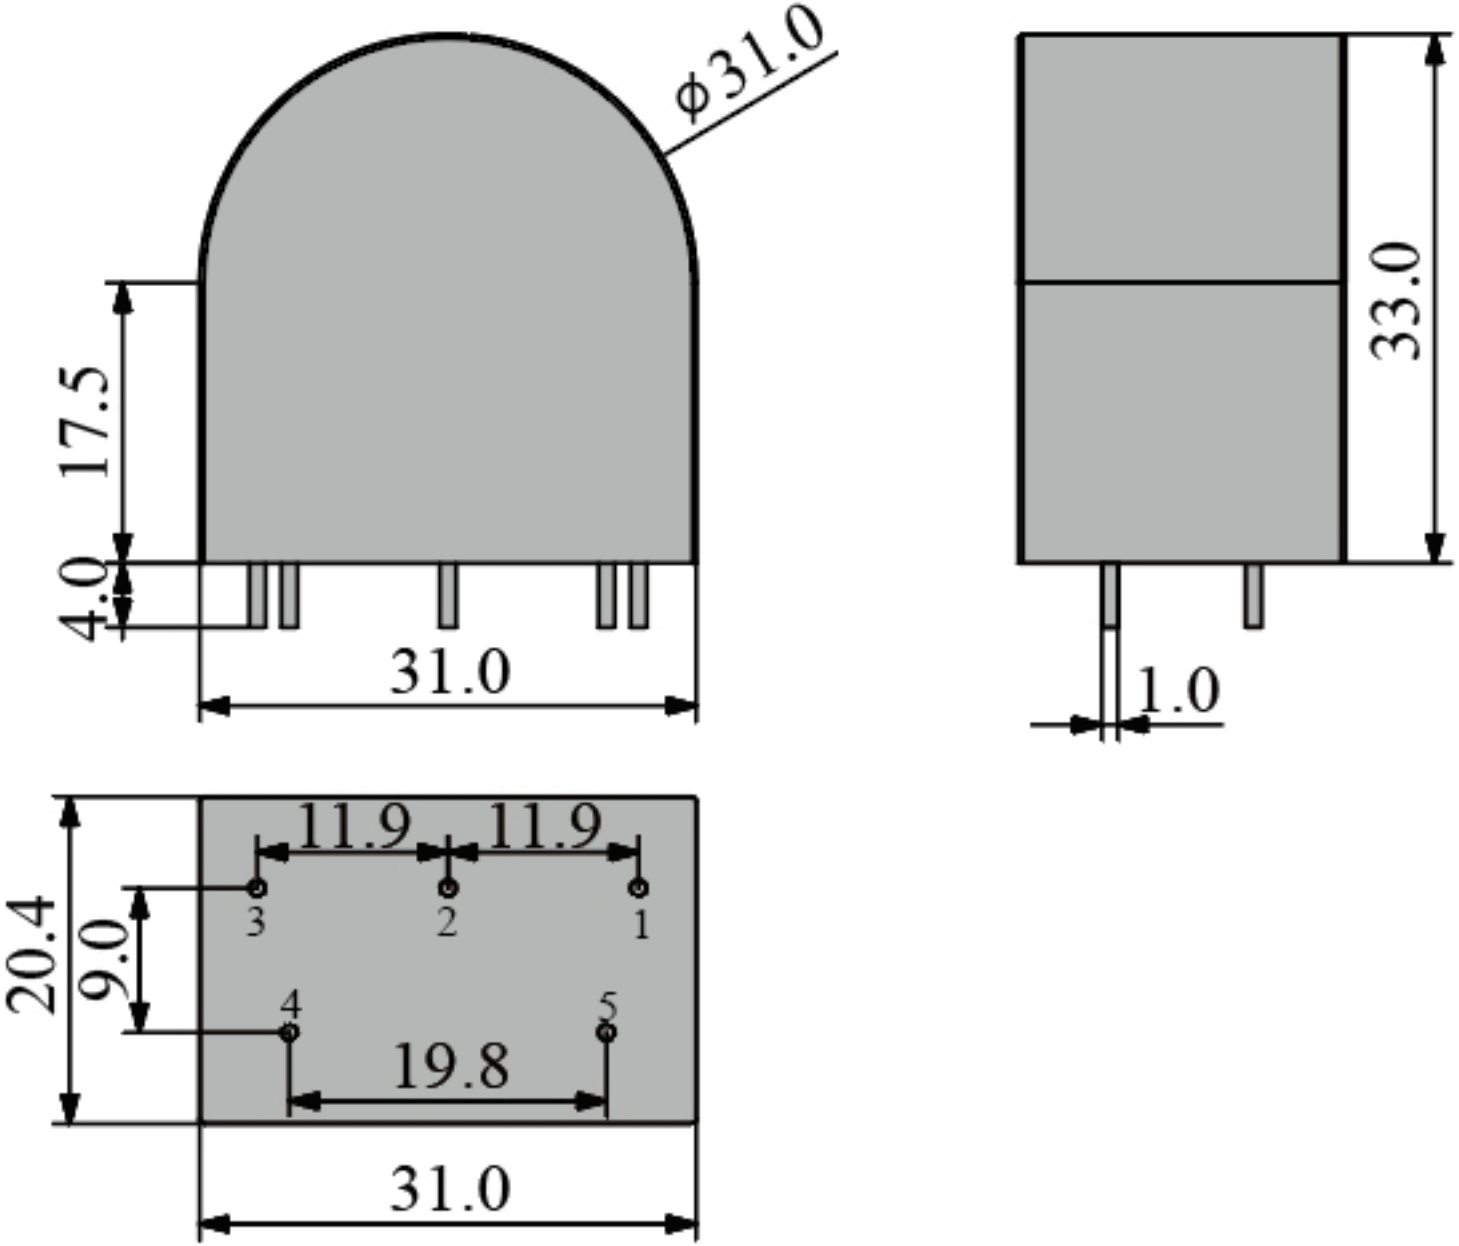
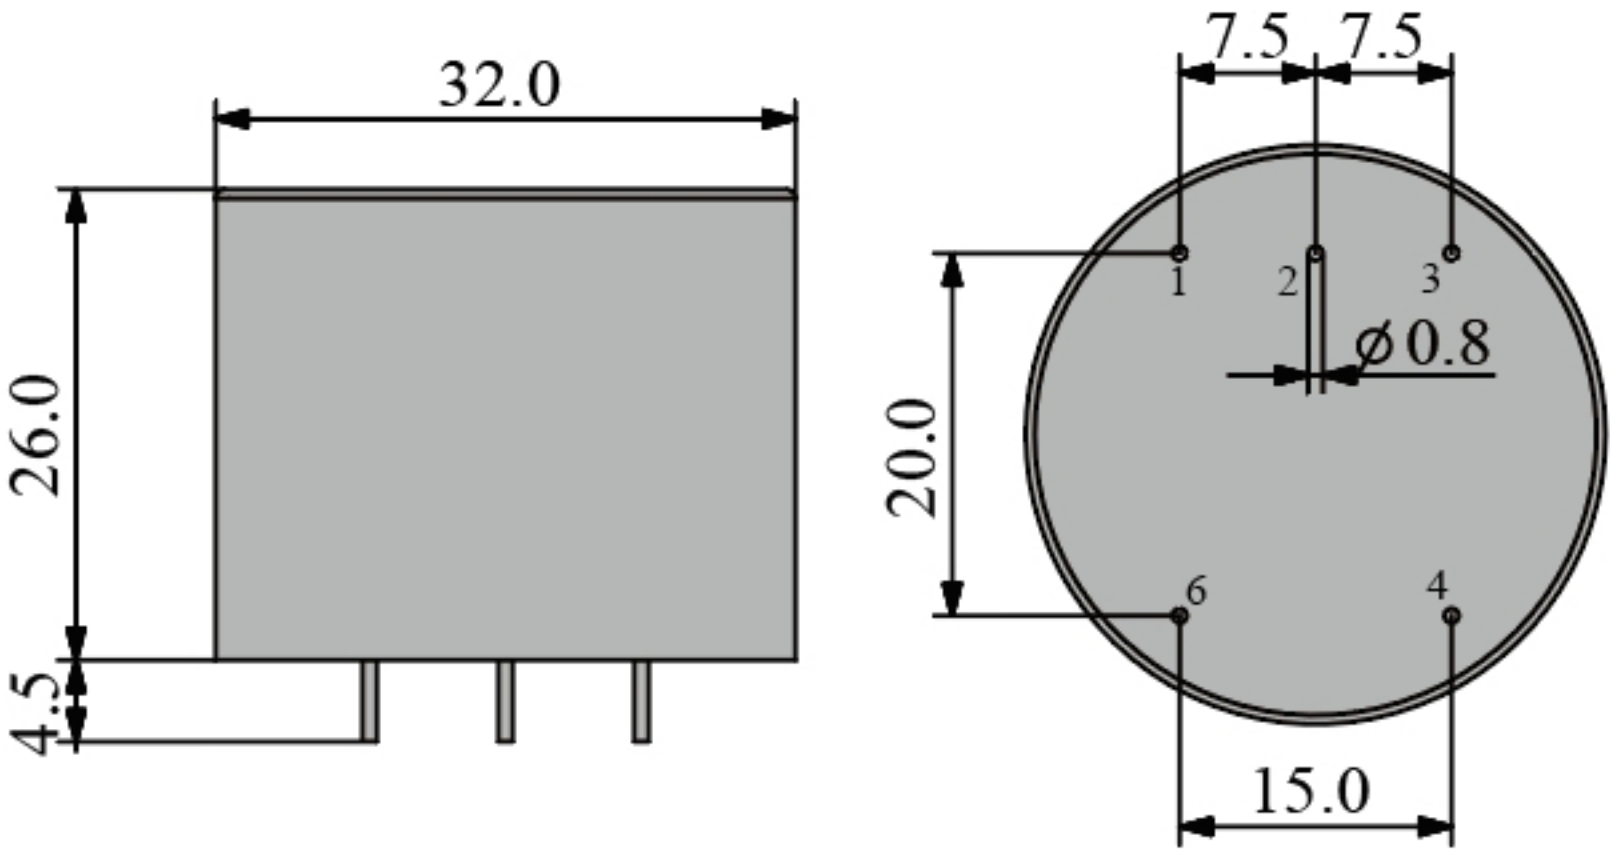
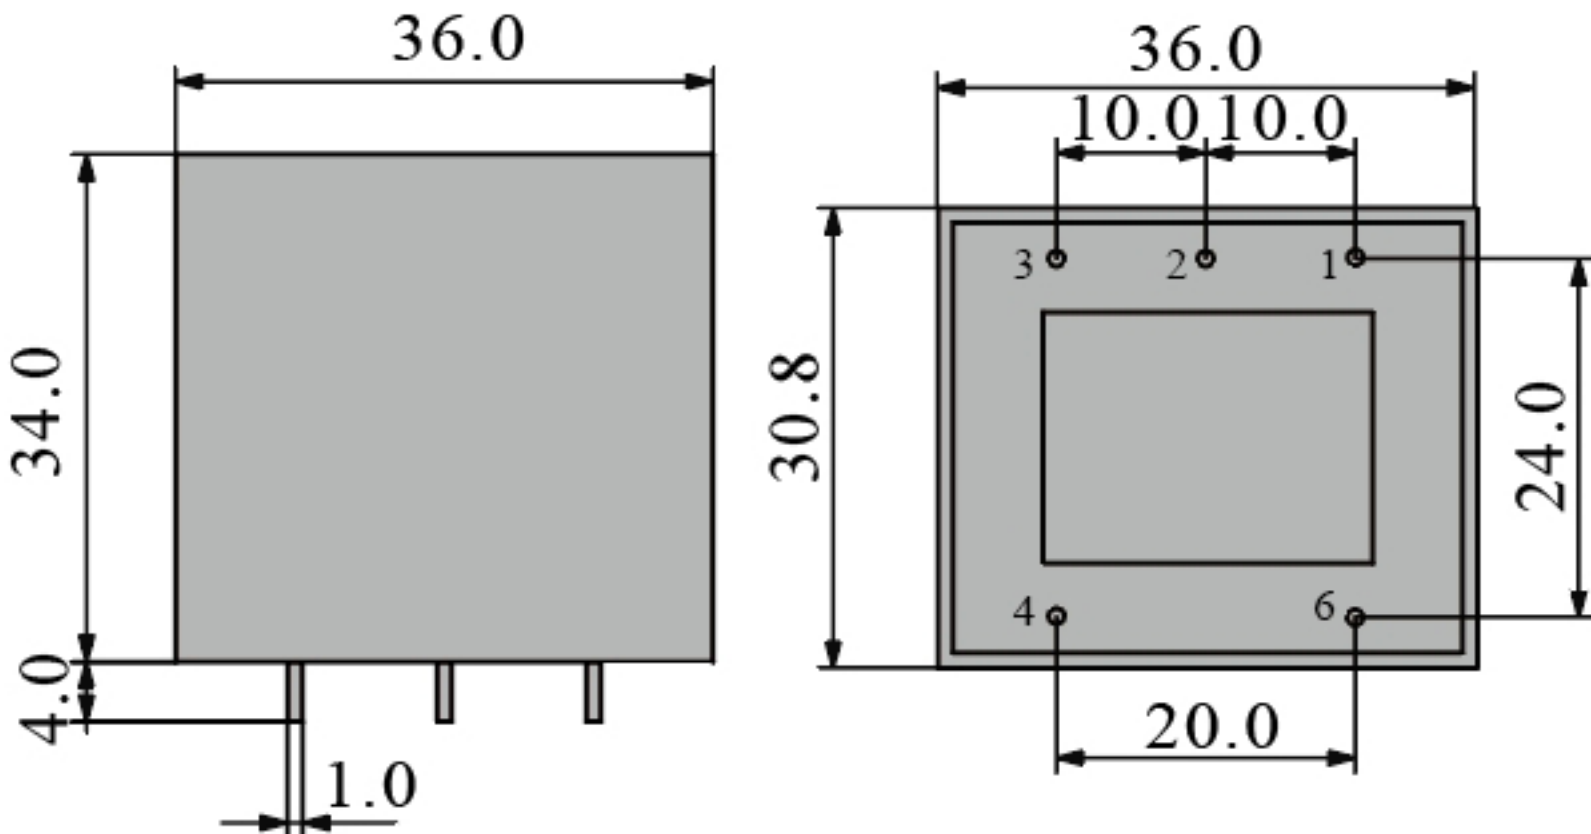


产品型号	PT291261/CT291261	
额定输入	0-120V	0-450 V
额定输出	7.07V	7.07V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT291261/CT291261 sensor. The front view (left) shows a rectangular component with a height of 28.8 mm and a base width of 4.0 mm. The base features two mounting pins, each with a diameter of 0.8 mm. The top view (right) shows a square component with a side length of 30.2 mm. The central area has a width of 15.0 mm. The mounting pins are positioned 7.5 mm from the bottom edge. The overall height of the component is 29.8 mm, and the central area has a height of 20.0 mm.	

产品型号	PT290661/CT290661	
额定输入	0-20A	0-250 V
额定输出	3.53V	3.53V
推荐负载	>100K	>100K
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing shows two views of the module. The front view (left) is a rectangle with a height of 34.0 and a base width of 5.0. The top view (right) is a rectangle with a width of 30.0 and a depth of 24.5. The top view also shows a central area with a width of 21.5 and a depth of 15.0. There are four mounting holes, each with a diameter of 7.5, arranged in a 2x2 grid. The distance between the centers of the holes is 15.0 horizontally and 15.0 vertically. The distance from the top edge to the center of the top holes is 7.5, and from the bottom edge to the center of the bottom holes is 7.5. The distance from the left edge to the center of the left holes is 7.5, and from the right edge to the center of the right holes is 7.5. The distance from the left edge to the center of the left holes is 7.5, and from the right edge to the center of the right holes is 7.5. The distance from the top edge to the center of the top holes is 7.5, and from the bottom edge to the center of the bottom holes is 7.5. The distance from the left edge to the center of the left holes is 7.5, and from the right edge to the center of the right holes is 7.5.	

产品型号	PT290791/CT290791	
额定输入	0-100A	0-150 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸		

产品型号	PT290861/CT290861	
额定输入	0-100A	0-220 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸		

产品型号	PT290961/CT290961	
额定输入	0-100A	0-450 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing consists of two views of a rectangular module. The front view (left) shows a rectangle with a width of 36.0 and a height of 34.0. Below the rectangle, there are three mounting pins. The distance from the bottom-left corner of the rectangle to the center of the first pin is 4.0. The distance between the centers of the first and second pins is 1.0. The top view (right) shows a square with a side length of 36.0. It features a central square with a side length of 20.0. Six mounting holes are arranged in a 2x3 grid. The horizontal distance between the first and second holes is 10.0, and between the second and third holes is 10.0. The vertical distance between the first and second holes is 10.0, and between the second and third holes is 10.0. The distance from the bottom-left corner of the outer square to the center of the first hole is 4.0. The distance from the bottom-left corner of the outer square to the center of the second hole is 20.0. The distance from the bottom-left corner of the outer square to the center of the third hole is 24.0.	