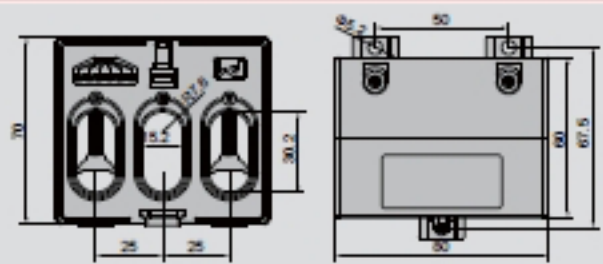
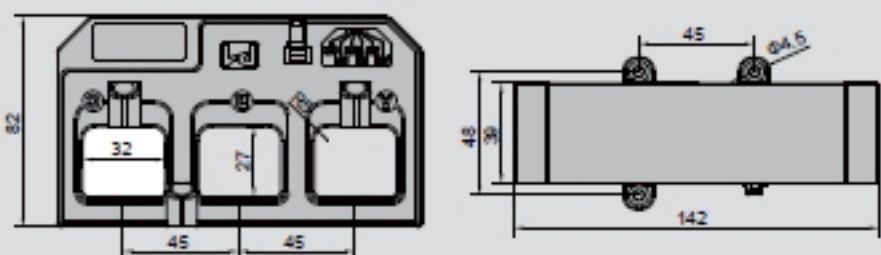
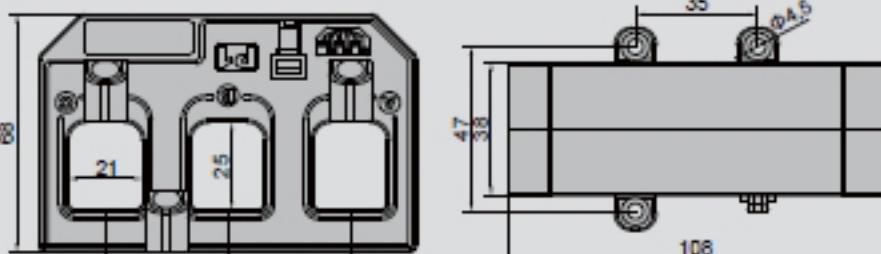
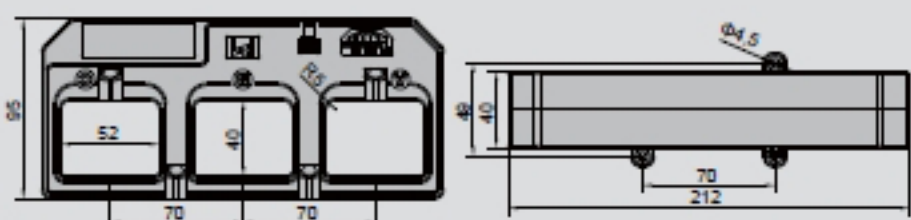


互感器的二次信号输出可以是小于 100mA 的电流信号或者电压信号。输出方式 RJ11 网口结构, 最大程度的提高安装便利性。

网口防拔罩用阻燃 ABS 工程塑料制作, 并可以用激光印制唯一的标记和序列号, 便于记录维护情况, 防止用户私自拔出网口插头而造成设备故障损坏。

A grey LEGO Technic connector with three green pins and one red pin.

A grey plastic component with three rectangular cutouts. It has five green pins: two on the top edge (one on the left, one on the right) and three on the bottom edge (one on the left, one in the middle, one on the right). There is a small red pin on the top edge in the middle. The component has some faint markings on the top surface.

初级 电流	二次 输出	二次负荷(VA)		产品尺寸图
		0.5级	1.0级	
60A	100mA 100mV 333mV	0.25	0.35	
100A		0.25	0.35	
125A		0.25	0.35	
160A		0.35	0.5	
200A		0.35	0.5	
60A	100mA 100mV 333mV	0.25	0.35	
100A		0.25	0.35	
160A		0.35	0.35	
200A		0.35	0.5	
250A		0.5	0.5	
300A		0.5	0.5	
320A		0.5	0.5	
200A	100mA 100mV 333mV	0.5	0.5	
250A		0.5	0.5	
320A		0.5	0.5	
400A		0.5	0.5	
500A		0.5	0.5	
600A		0.5	0.5	
750A		0.5	0.5	
800A		0.5	0.5	
320A	100mA 100mV 333mV	0.5	0.5	
400A		0.5	0.5	
500A		0.5	0.5	
600A		0.5	0.5	
750A		0.5	0.5	
800A		0.5	0.5	
1000A		0.5	0.5	
1200A	0.5	0.5		