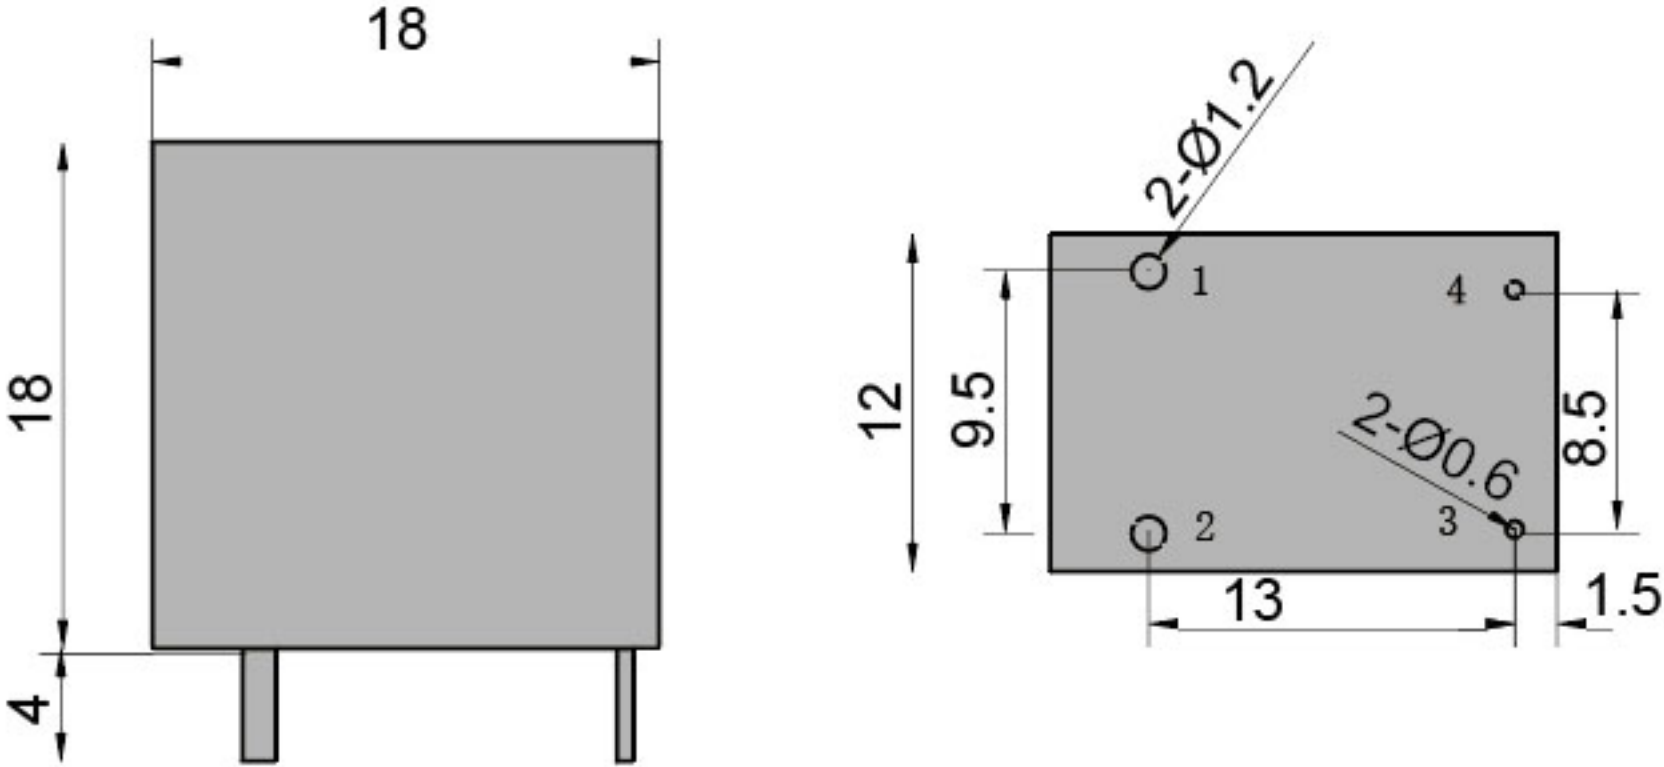


MODEL NUMBER	CT232801				
RATED INPUT	5A	5A	1A	5A	10A
RATED OUTPUT	2.5mA	5mA	2.5mA	2mA	5mA
OPTIMAL LOAD	200Ω	100Ω	40Ω	200Ω	100Ω
ACCURACY GRADE	0.2	0.2	0.2	0.1	0.1
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the CT232801 component. The top view shows a rectangular footprint with a width of 18mm and a height of 12mm. Two mounting pins are located at the bottom, with a 4mm gap between the component body and the base. The side view shows a height of 9.5mm. Four mounting holes are present: two on the left (labeled 1 and 2) with a diameter of 1.2mm (2-Ø1.2), and two on the right (labeled 3 and 4) with a diameter of 0.6mm (2-Ø0.6). The distance between the left holes is 13mm, and the distance between the right holes is 8.5mm. The overall height of the component is 1.5mm.				