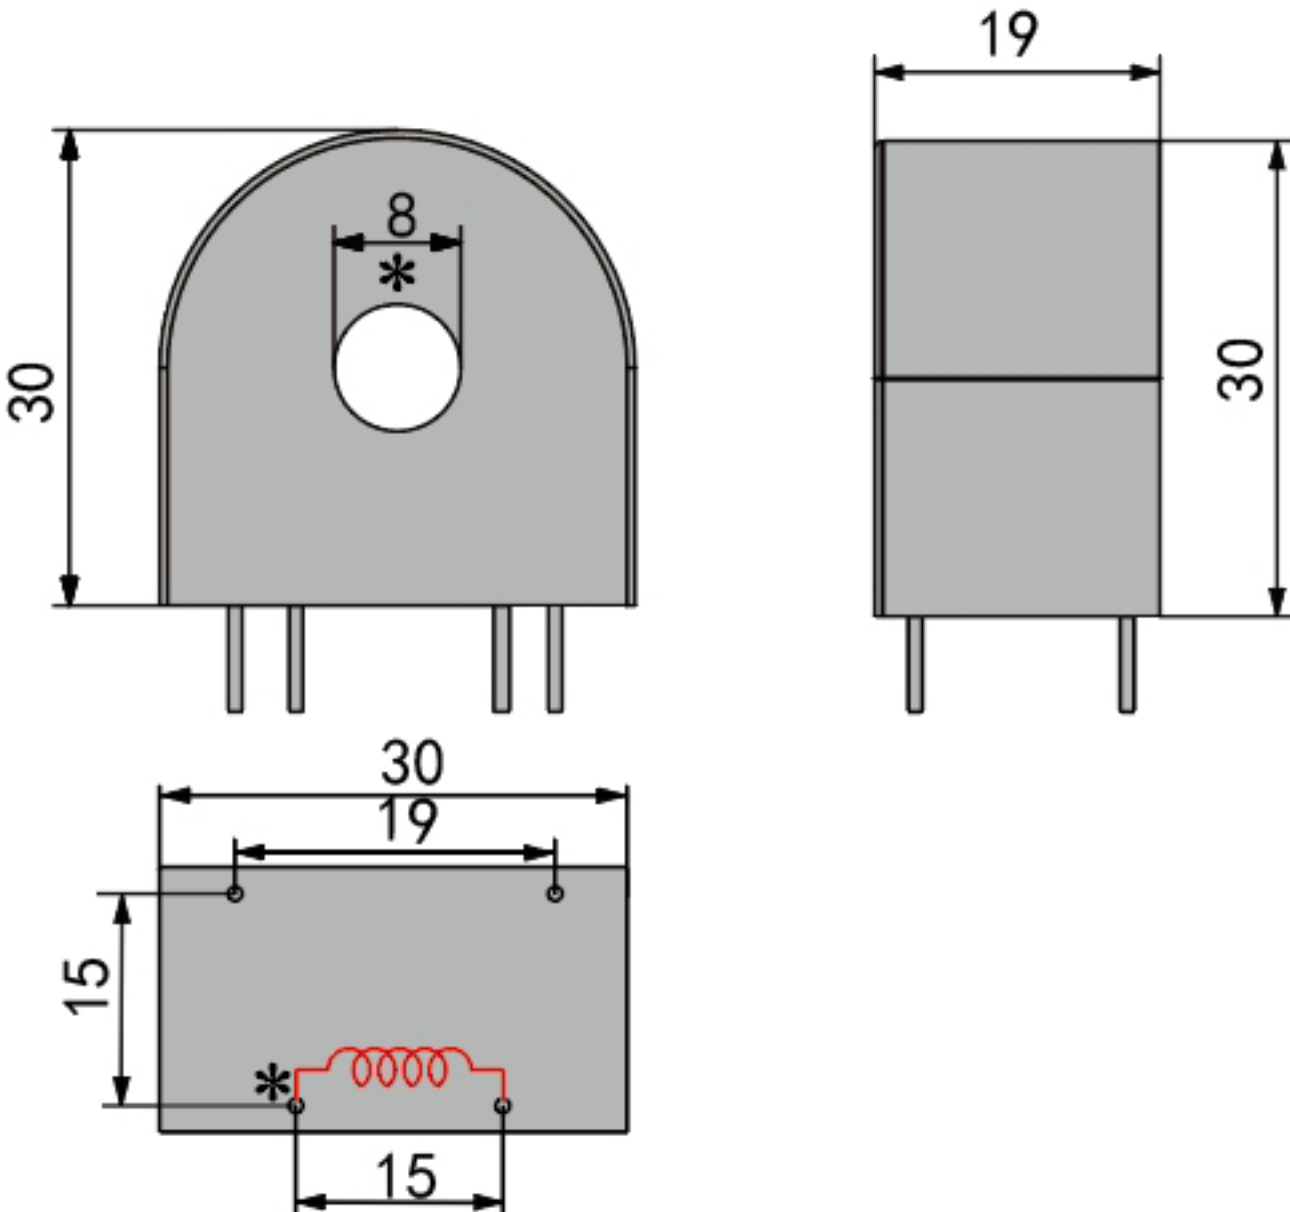


MODEL NUMBER	CT221661				
RATED INPUT	5A	10A	20A	50A	60A
RATED OUTPUT	5mA	5mA	10mA	20mA	20mA
OPTIMAL LOAD	200Ω	200Ω	200Ω	200Ω	200Ω
ACCURACY GRADE	0.1	0.2	0.2	0.1	0.1
DIMENSIONS	 The technical drawings illustrate the physical dimensions of the CT221661 component in three views: Top View: Shows a semi-circular component with a total height of 30. A central circular feature has a diameter of 8. A dimension line with an asterisk (*) indicates the width of the central feature. Side View: Shows the component's profile with a total height of 30 and a width of 19. Bottom View: Shows the base of the component with a total width of 30 and a height of 15. It features a central rectangular area with a width of 19. A red spiral inductor is shown on the base, with a dimension line of 15 indicating its width. An asterisk (*) is placed near the inductor.				