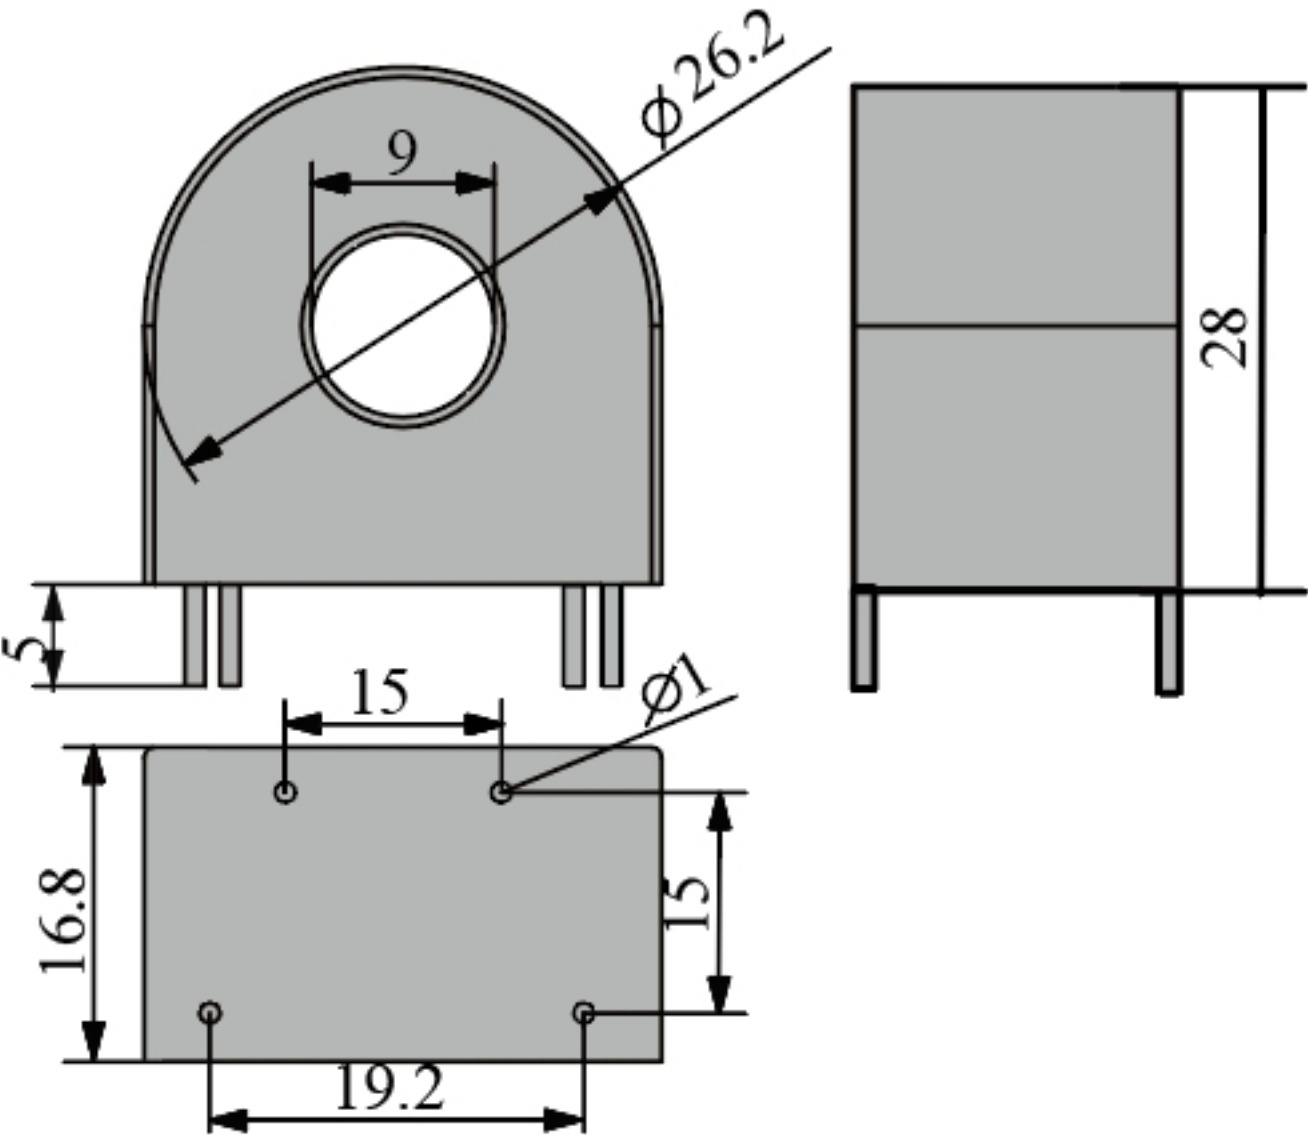


MODEL NUMBER	CT222001				
RATED INPUT	20A	40A	50A	80A	100A
RATED OUTPUT	20mA	20mA	20mA	40mA	25mA
OPTIMAL LOAD	100Ω	100Ω	100Ω	50Ω	100Ω
ACCURACY GRADE	0.1	0.1	0.1	0.1	0.1
DIMENSIONS	 Technical drawing of the CT222001 component showing three views: a top view of the semi-circular top with a central hole, a side view of the rectangular base, and a front view of the base with mounting holes. Dimensions are provided in millimeters. - Top View: Semi-circular top with a central hole. Hole diameter is $\phi 26.2$. Hole width is 9. The top thickness is 5. - Side View: Rectangular base with a height of 28. - Front View: Rectangular base with a width of 19.2 and a height of 16.8. There are four mounting holes, each with a diameter of $\phi 1$. The distance between the two top holes is 15, and the distance between the two bottom holes is 15. The distance from the top edge to the top holes is 15.				