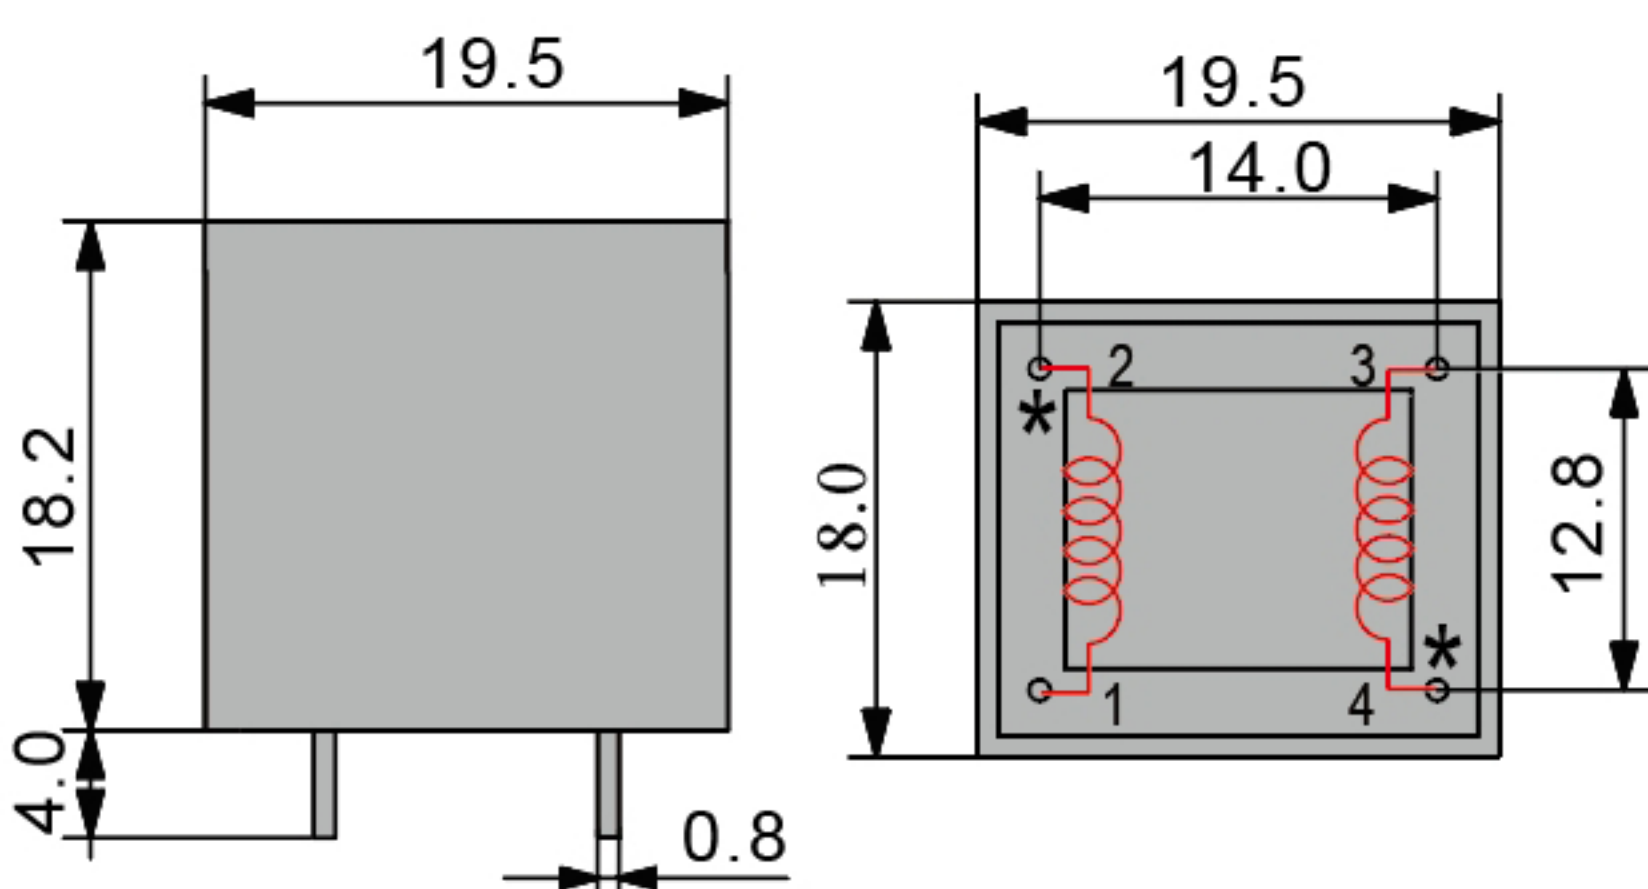
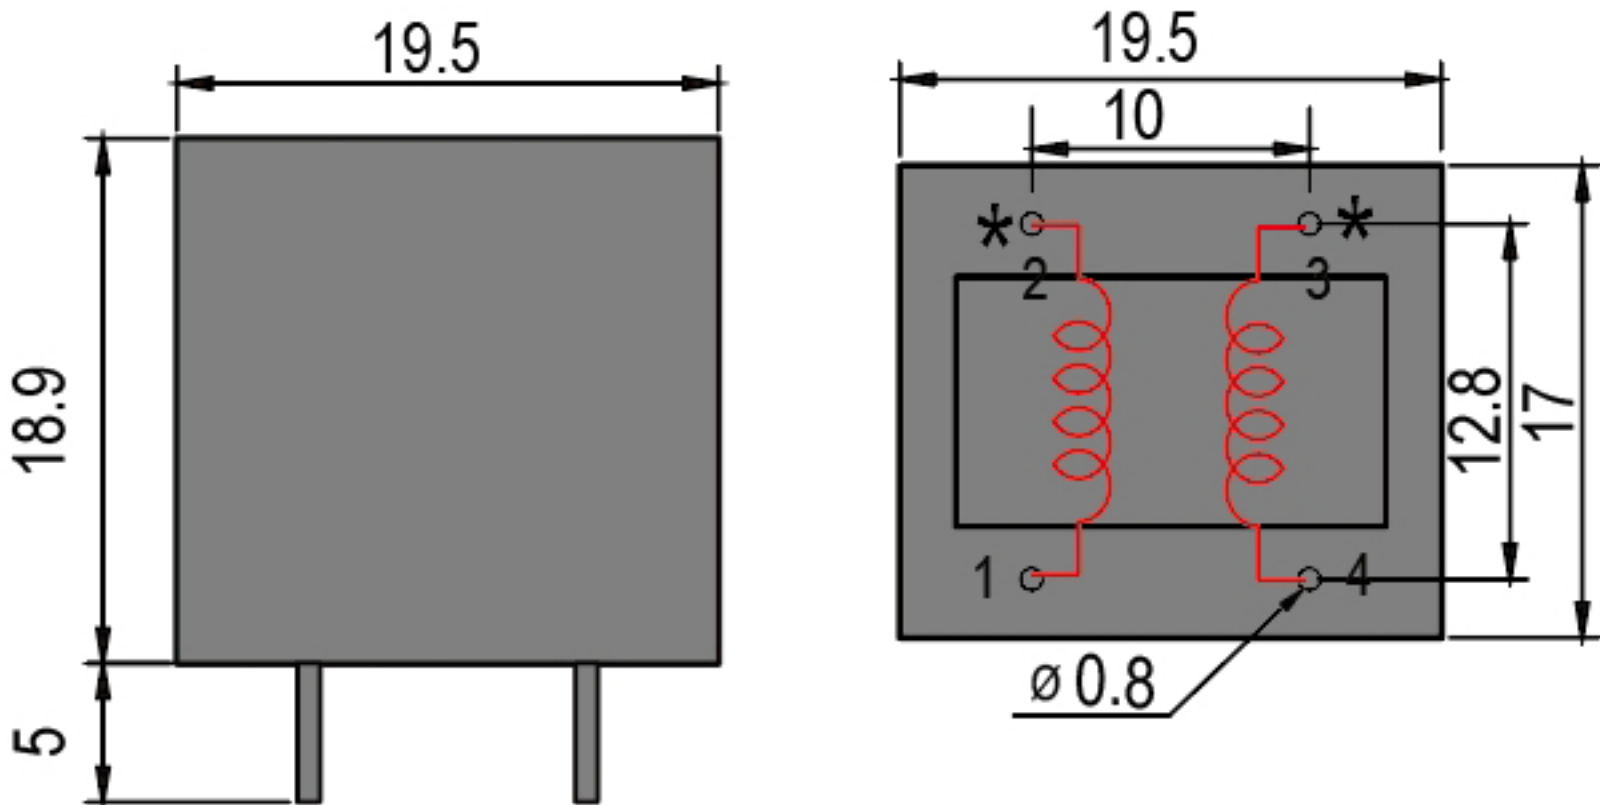
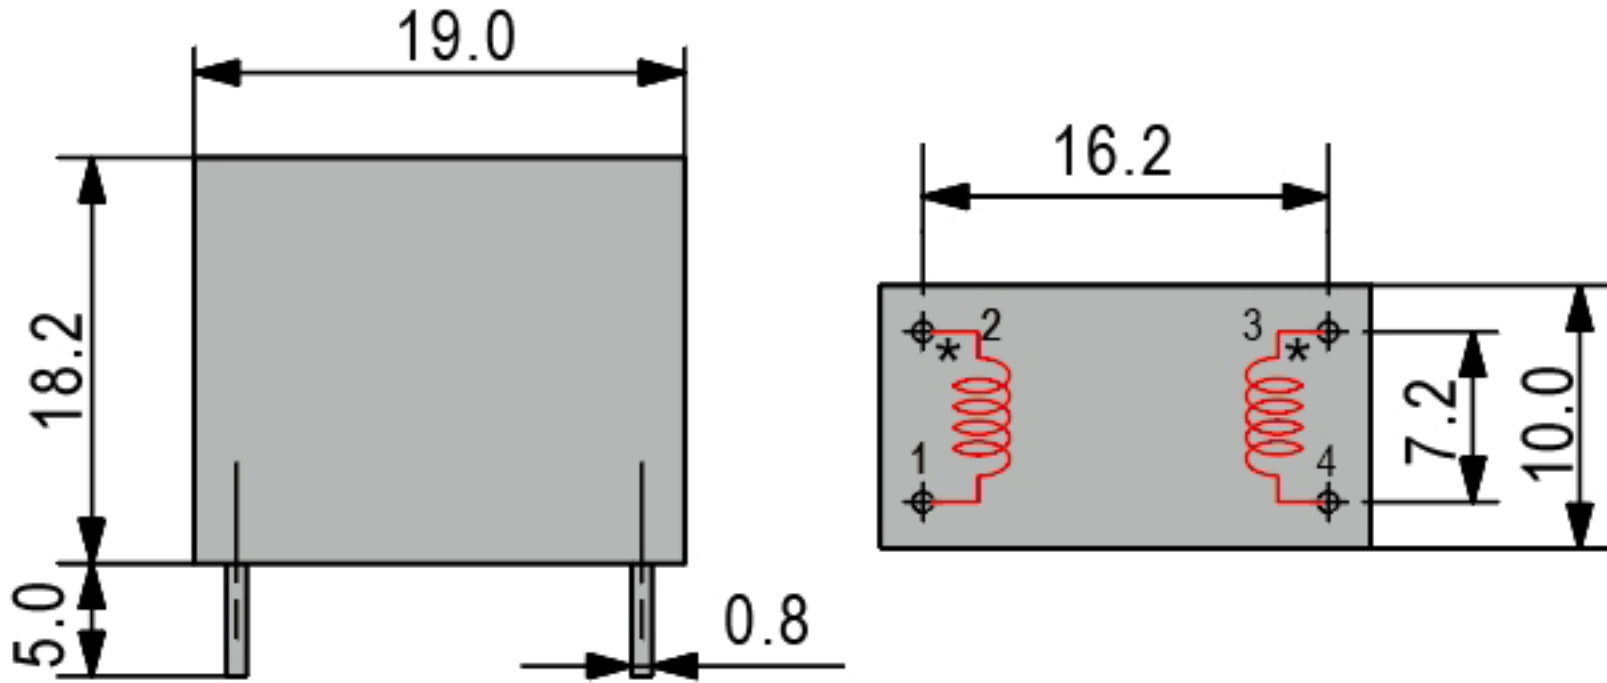
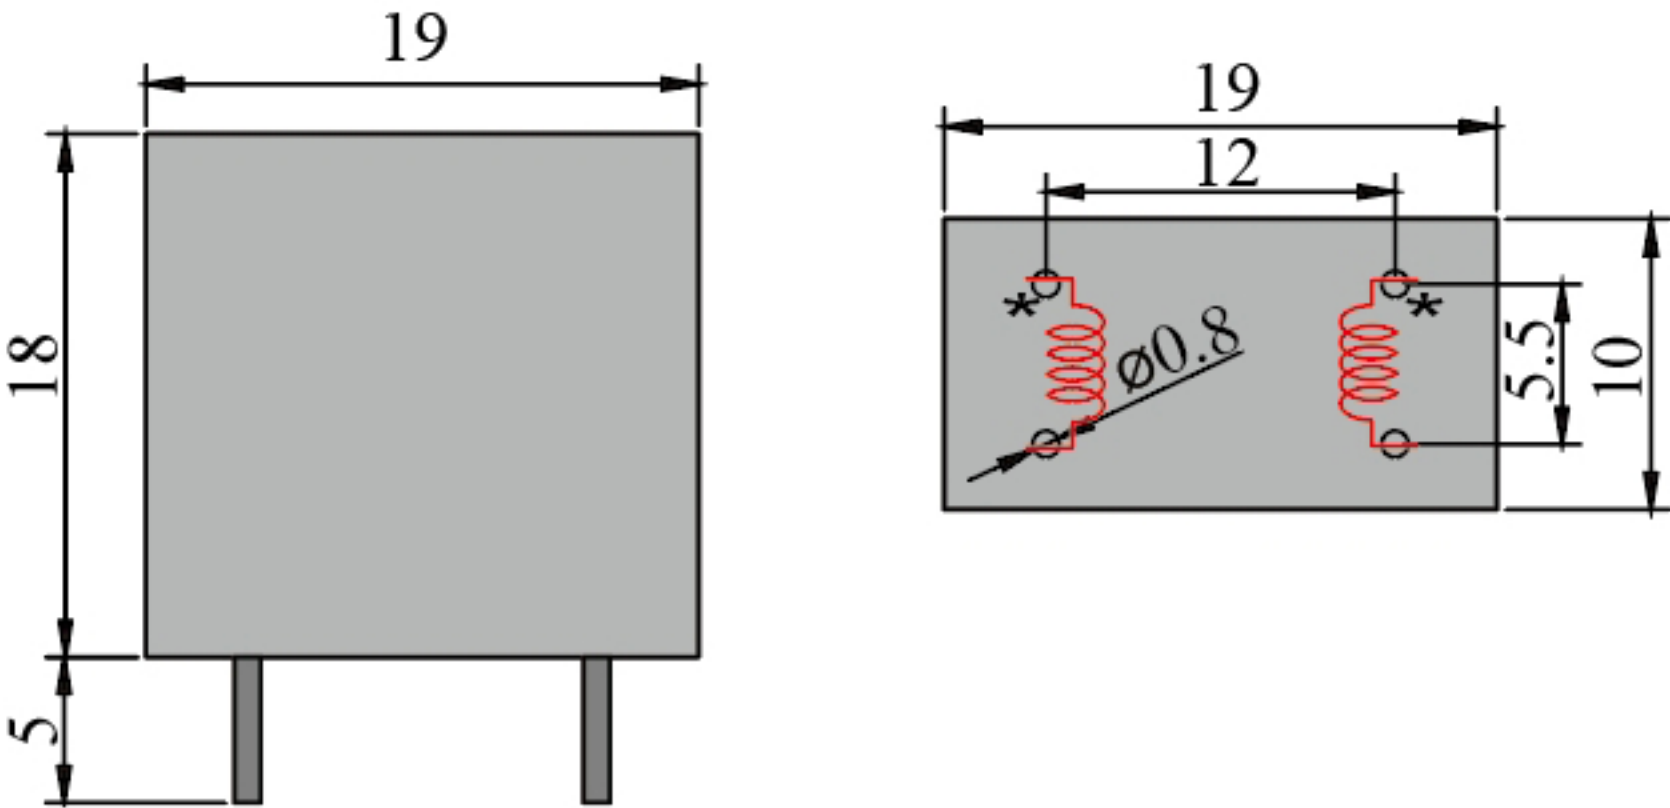
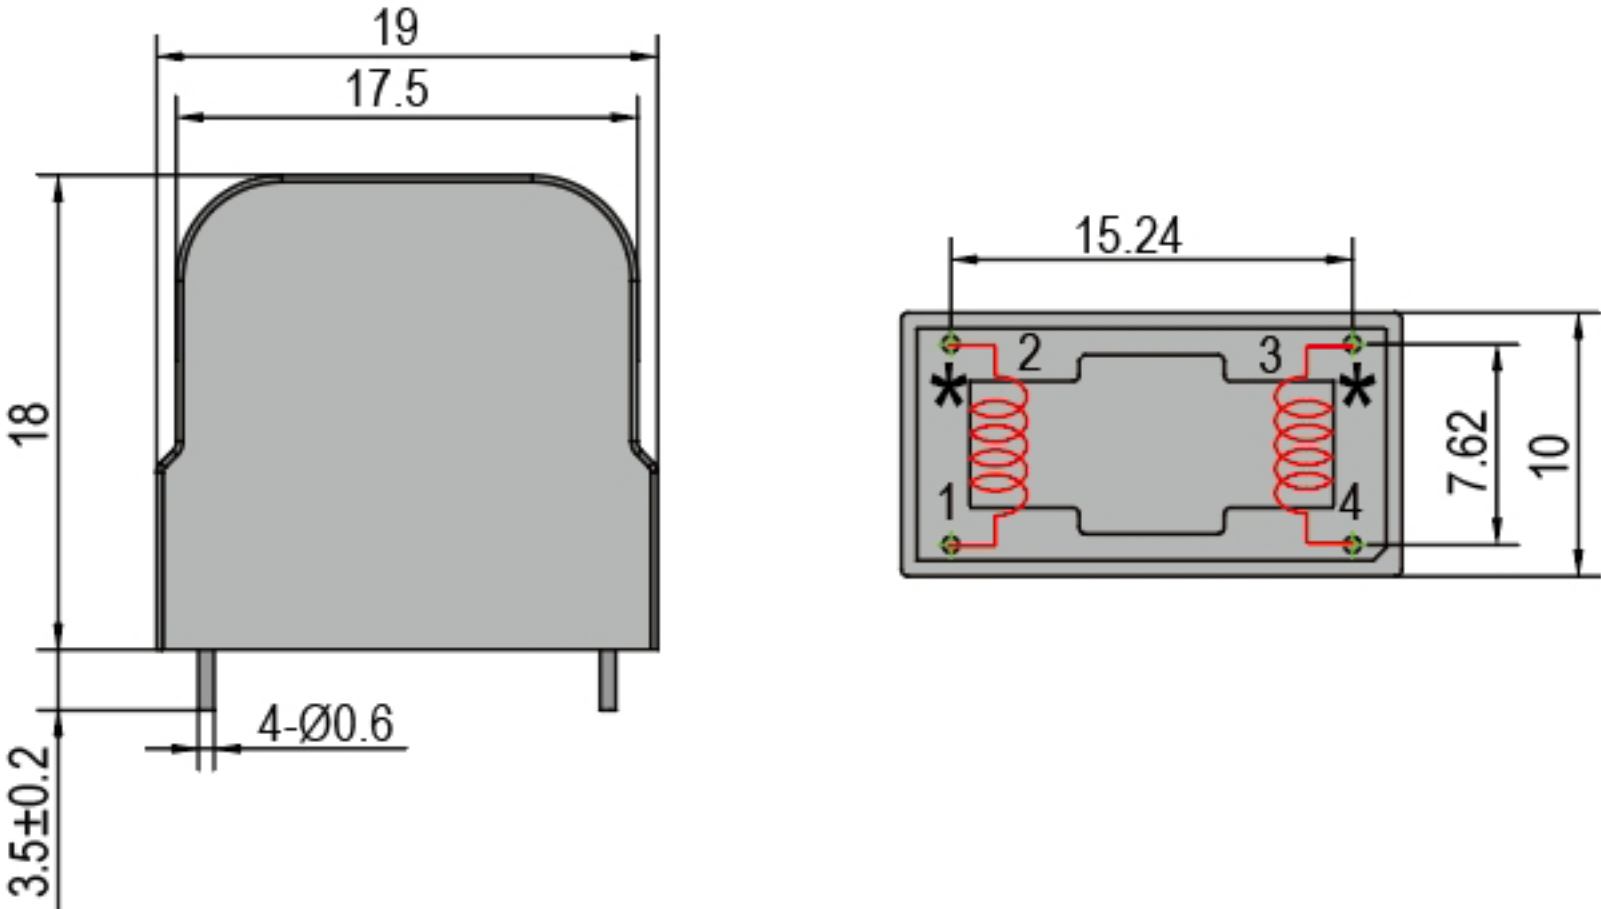



MODEL NUMBER	PT232161	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing shows two views of the PT232161 transformer. The front view (left) shows a rectangular core with a width of 19.5 and a height of 18.2. The mounting base has a width of 4.0 and a height of 0.8. The top view (right) shows the same core with a width of 19.5 and a height of 18.0. The internal winding is shown in red, with terminals 1, 2, 3, and 4. The winding is connected in a center-tapped configuration, with terminals 1 and 4 at the ends and terminals 2 and 3 at the center. The distance between terminals 1 and 2 is 14.0, and the distance between terminals 3 and 4 is 12.8. The distance between terminals 1 and 4 is 19.5.	

MODEL NUMBER	PT232361	
RATED INPUT	1 mA	2mA
RATED OUTPUT	1 mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 500\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing consists of two views of a transformer component. The left view is a front elevation showing a rectangular body with a width of 19.5 and a height of 18.9. Two mounting pins are shown at the base, with a dimension of 5 indicating the distance from the bottom edge to the top of the pins. The right view is a top-down plan view of the same component. It shows a square footprint with a side length of 19.5. The internal winding area is a square with a side length of 10. The distance from the outer edge to the start of the winding is 12.8, and the total distance from the outer edge to the center of the winding is 17. The winding is shown in red, with terminals labeled 1, 2, 3, and 4. Terminals 2 and 3 are marked with an asterisk (*). The diameter of the mounting holes is indicated as $\varnothing 0.8$.	

MODEL NUMBER	PT232461	
RATED INPUT	1 mA	2 mA
RATED OUTPUT	1 mA	2 mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the PT232461 sensor. The top view shows a rectangular component with a width of 19.0 and a height of 18.2. The side view shows a thickness of 5.0. The bottom view shows two mounting holes, each with a diameter of 0.8. The top view also shows two internal coils, each with a diameter of 16.2. The side view shows two internal coils, each with a diameter of 7.2. The bottom view shows two internal coils, each with a diameter of 10.0.	

MODEL NUMBER	PT232561	
RATED INPUT	1 mA	2mA
RATED OUTPUT	1 mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing consists of two views of a rectangular component. The front view (left) shows a rectangle with a width of 19 and a height of 18. Two pins extend from the bottom, with a dimension of 5 from the bottom edge to the top of the pins. The top view (right) shows a rectangle with a width of 19 and a depth of 10. The distance between the two pins is 12. Each pin has a diameter of $\varnothing 0.8$. The pins are located 5.5 from the side edges. Red spiral lines represent the internal structure of the pins, with asterisks marking the top and bottom of the spiral.	

MODEL NUMBER	PT232661	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawings show the physical dimensions of the PT232661 component. The front view (left) shows a component with a total width of 19mm and a body width of 17.5mm. The total height is 18mm, with a mounting tab height of 3.5±0.2mm. The base has four mounting holes, each with a diameter of 0.6mm (4-Ø0.6). The top view (right) shows a rectangular component with a length of 15.24mm and a total width of 10mm. The central body width is 7.62mm. The top view also shows the internal coil structure with terminals labeled 1, 2, 3, and 4, and two asterisks (*) indicating specific points on the top surface.	

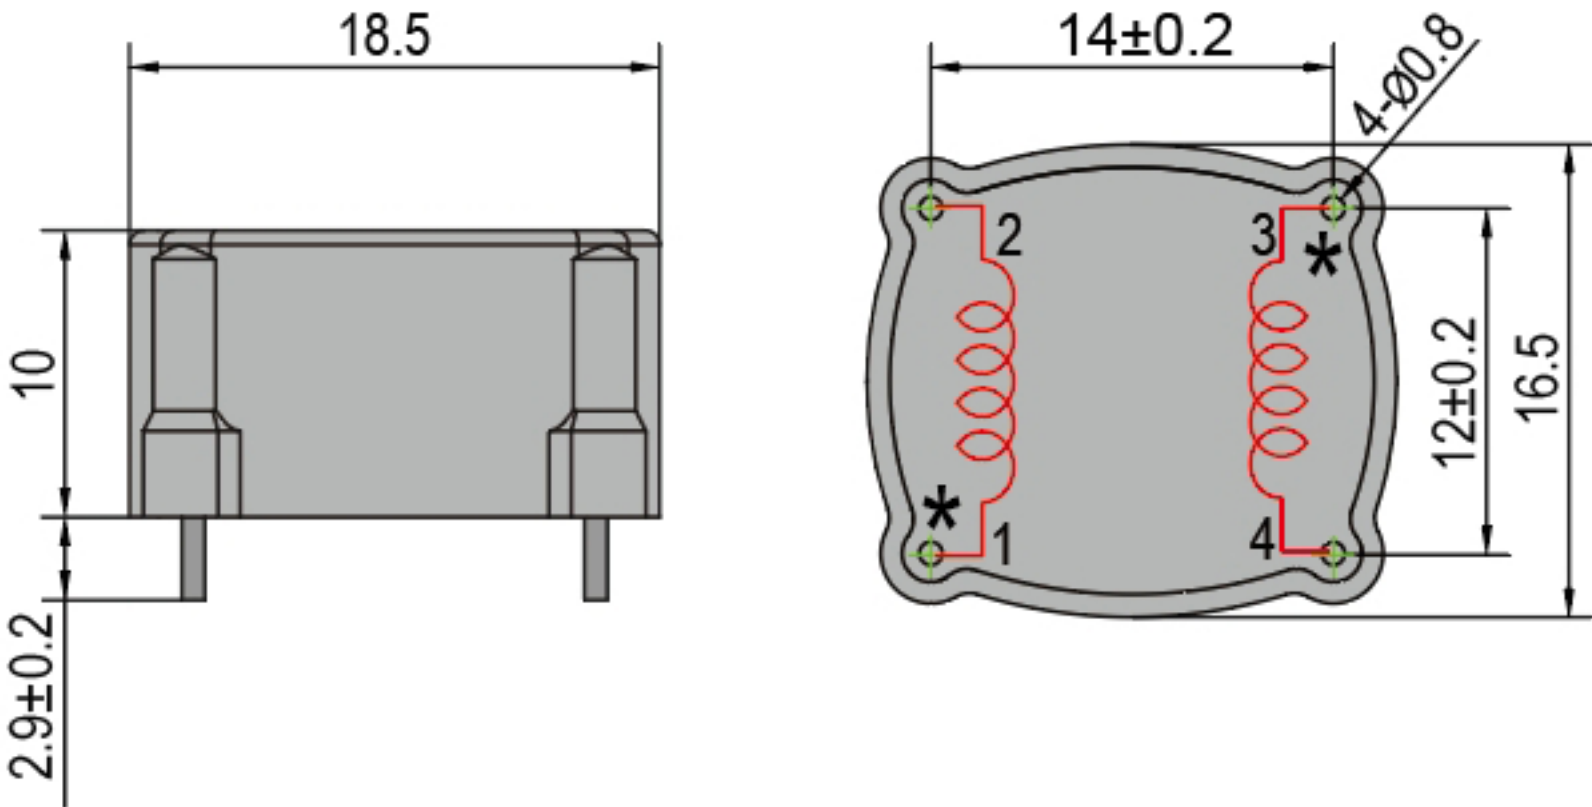MODEL NUMBER	PT232861	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 500\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawings show the physical dimensions of the PT232861 component. The side view (left) indicates a total width of 18.5, a height of 10, and a mounting tab height of 2.9±0.2. The top view (right) shows a rectangular footprint with a width of 14±0.2 and a height of 16.5. The central area has a height of 12±0.2. Four mounting holes are located at the corners, each with a diameter of 0.8 (labeled as 4-Ø0.8). Red winding patterns are visible on the top surface, with terminals labeled 1, 2, 3, and 4. Asterisks (*) mark the center of each winding area.	