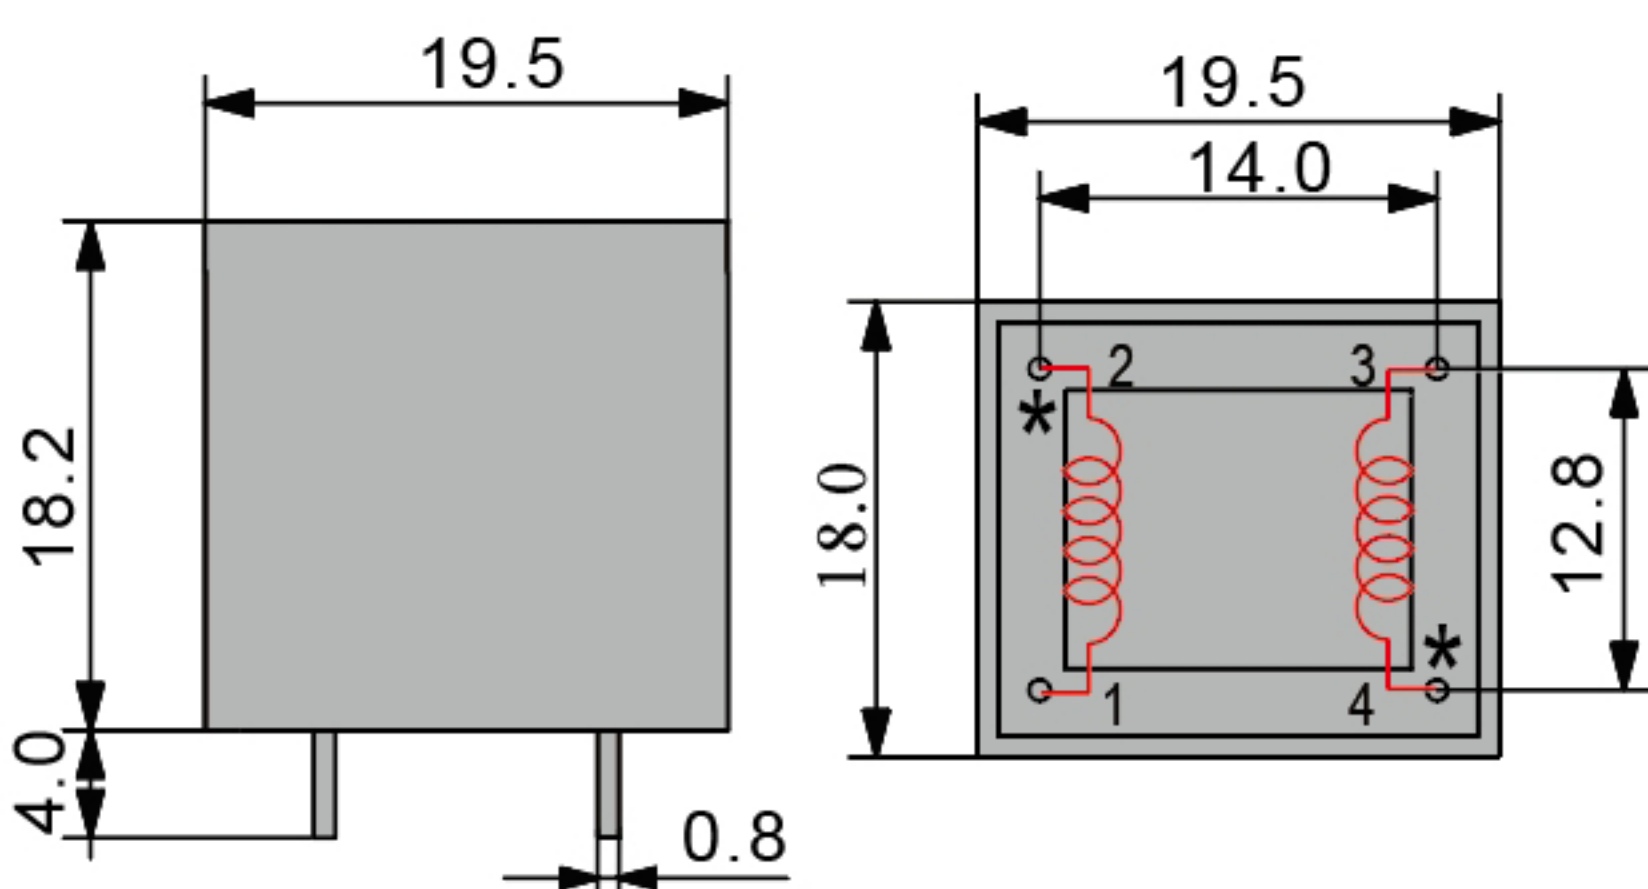
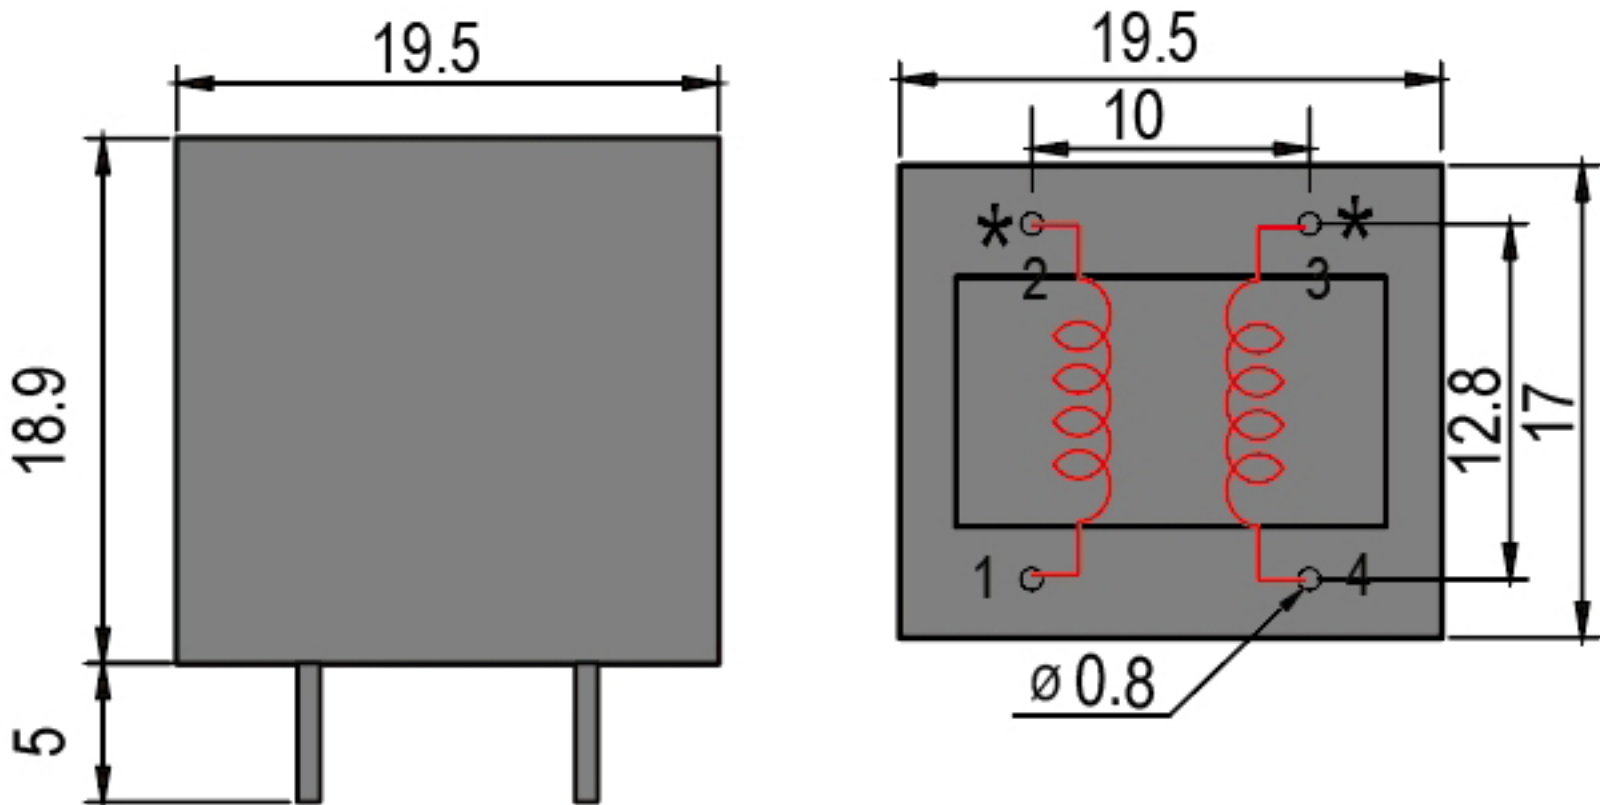
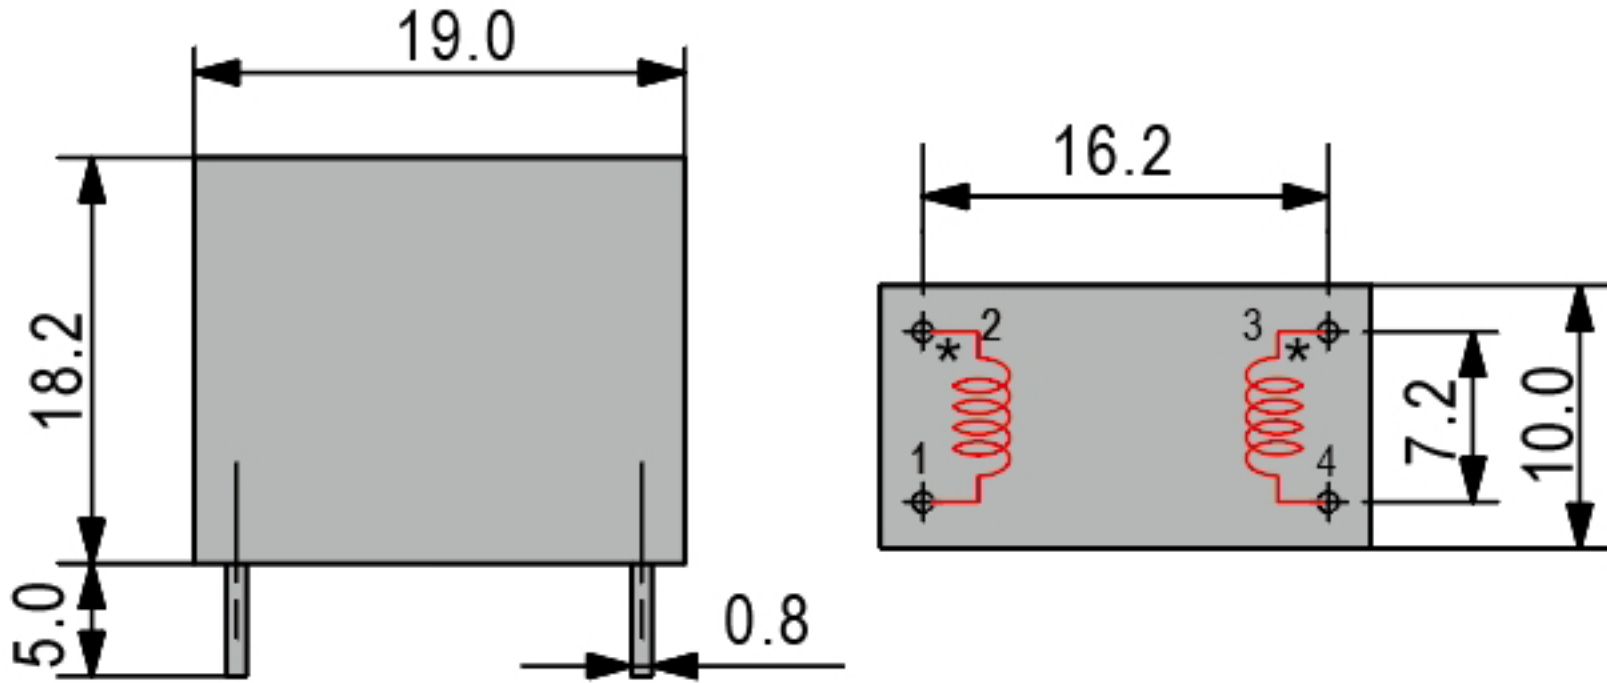


MODEL NUMBER	PT232161	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing shows two views of the PT232161 transformer. The front view (left) shows a rectangular core with a width of 19.5 and a height of 18.2. The mounting base has a width of 4.0 and a height of 0.8. The top view (right) shows the same core with a width of 19.5 and a height of 18.0. The inner winding area has a width of 14.0 and a height of 12.8. The winding is shown in red with terminals 1, 2, 3, and 4. Terminals 1 and 2 are on the left, and 3 and 4 are on the right. There are also asterisks (*) indicating specific points on the winding.	

MODEL NUMBER	PT232361	
RATED INPUT	1 mA	2mA
RATED OUTPUT	1 mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 500\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing consists of two views of the PT232361 transformer. The left view is a front elevation showing a rectangular body with a width of 19.5 and a height of 18.9. Two mounting pins are shown at the base, with a dimension of 5 indicating the distance from the bottom edge to the top of the pins. The right view is a top-down plan view of the transformer. It shows a square footprint with a side length of 19.5. The internal winding area is a square with a side length of 10. The distance from the top edge of the body to the top of the winding area is 12.8. The distance from the bottom edge of the body to the bottom of the winding area is 17. The winding area contains two coils, each with four turns. The terminals are labeled 1, 2, 3, and 4. Terminals 1 and 2 are on the left coil, and terminals 3 and 4 are on the right coil. The distance from the left edge of the body to terminal 2 is 10. The distance from the right edge of the body to terminal 3 is 10. The diameter of the terminal holes is indicated as $\varnothing 0.8$. There are also asterisks (*) next to terminals 2 and 3.	

MODEL NUMBER	PT232461	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the PT232461 sensor. It includes a top view and a side view. The top view shows a rectangular body with a width of 19.0 and a height of 18.2. The side view shows a width of 16.2 and a height of 10.0. The sensor has two mounting holes, each with a diameter of 5.0. The distance between the centers of the mounting holes is 19.0. The sensor is shown with two electrical leads, each with a length of 16.2. The leads are labeled 1, 2, 3, and 4, with a red star symbol indicating the connection points. The sensor is shown in a gray color.	