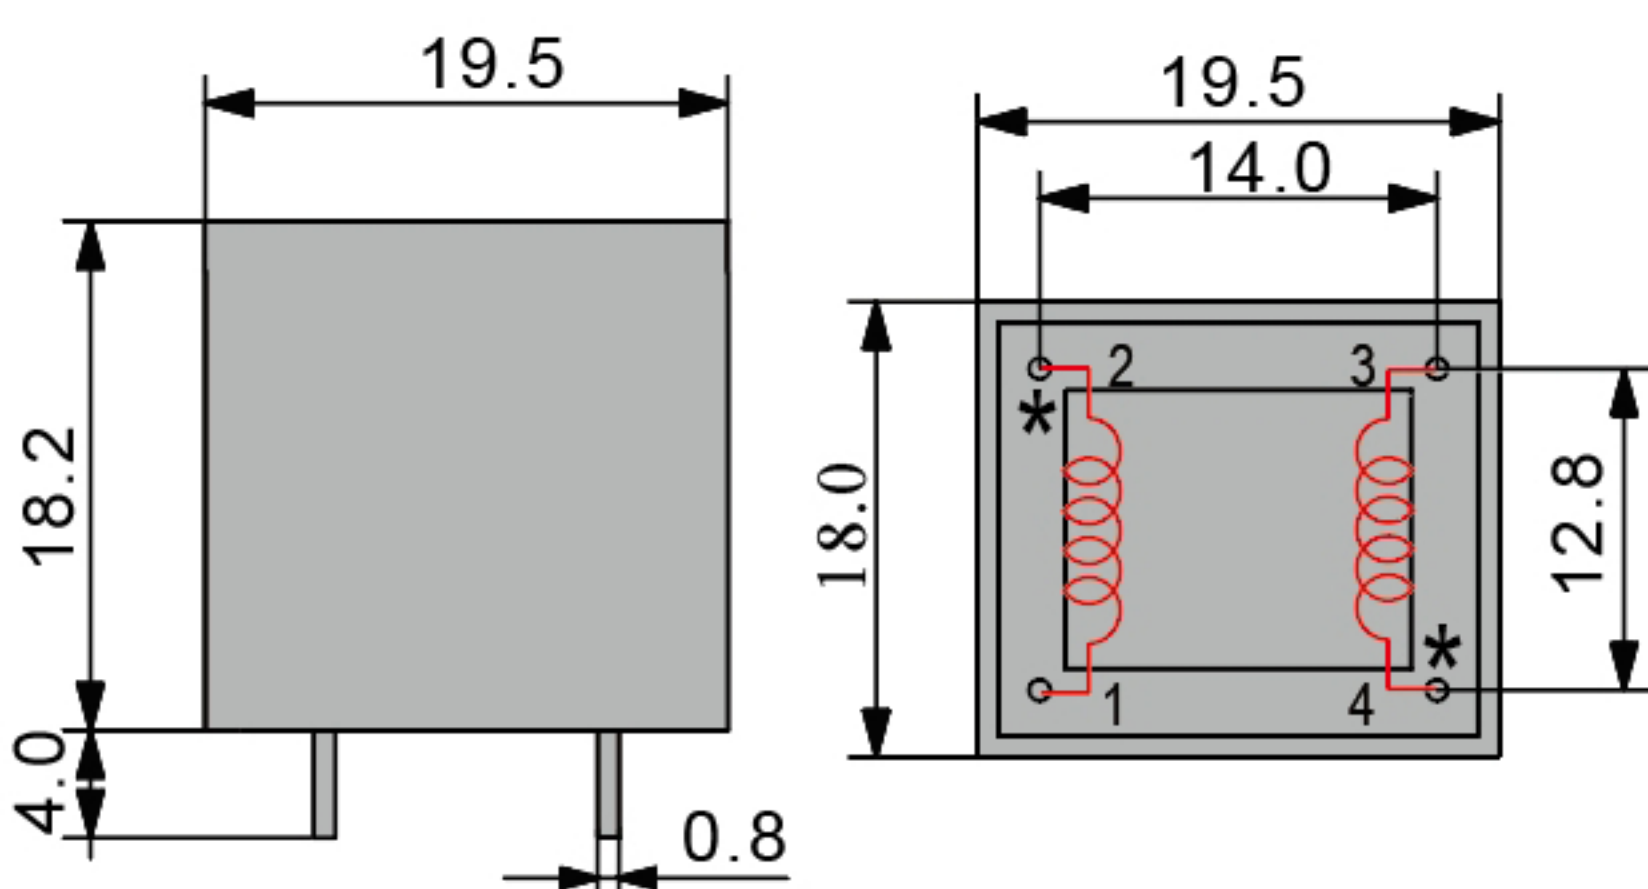
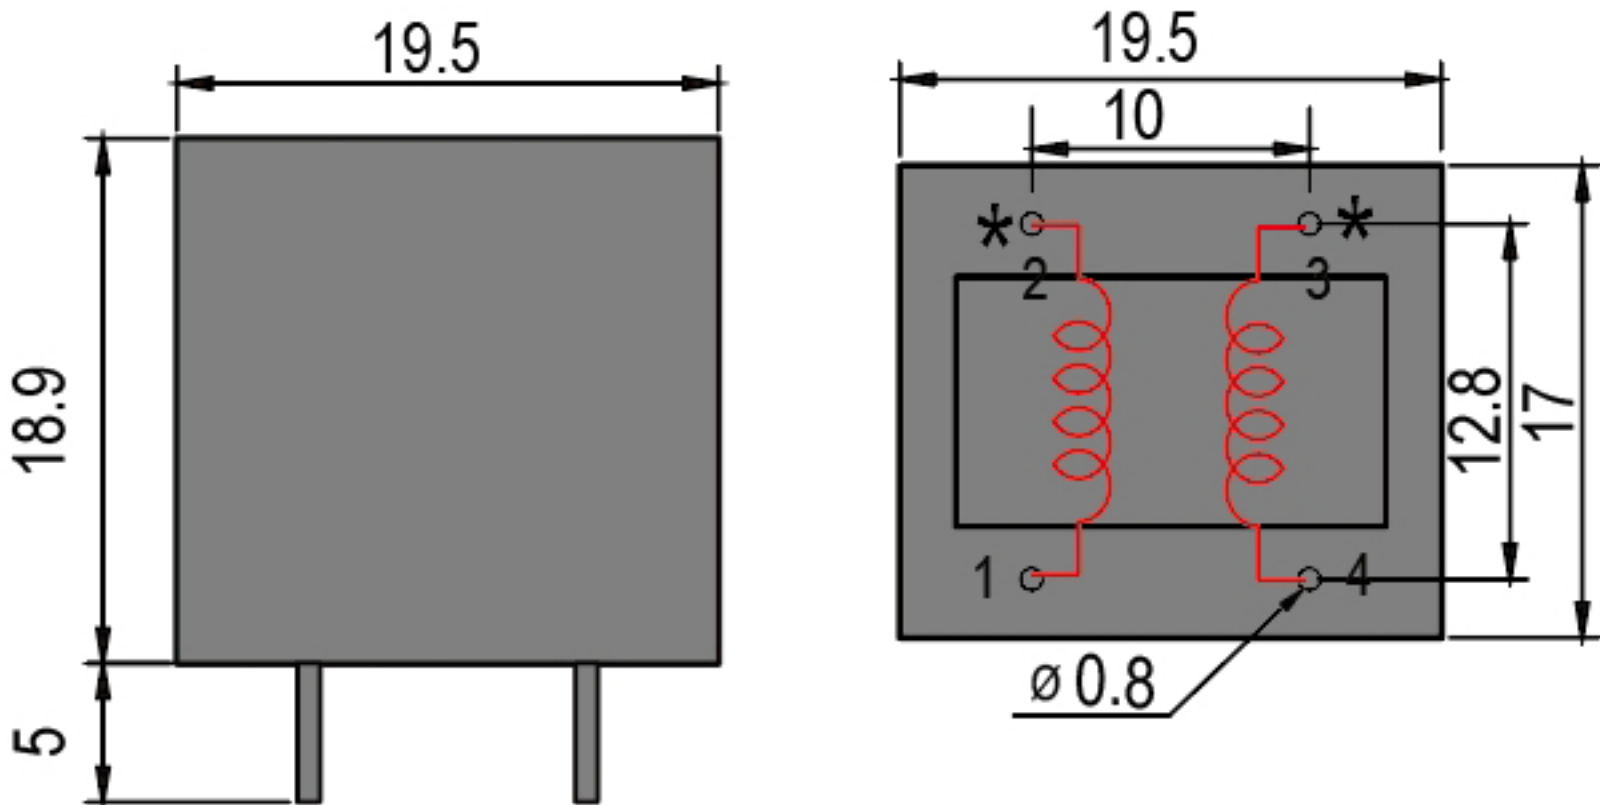
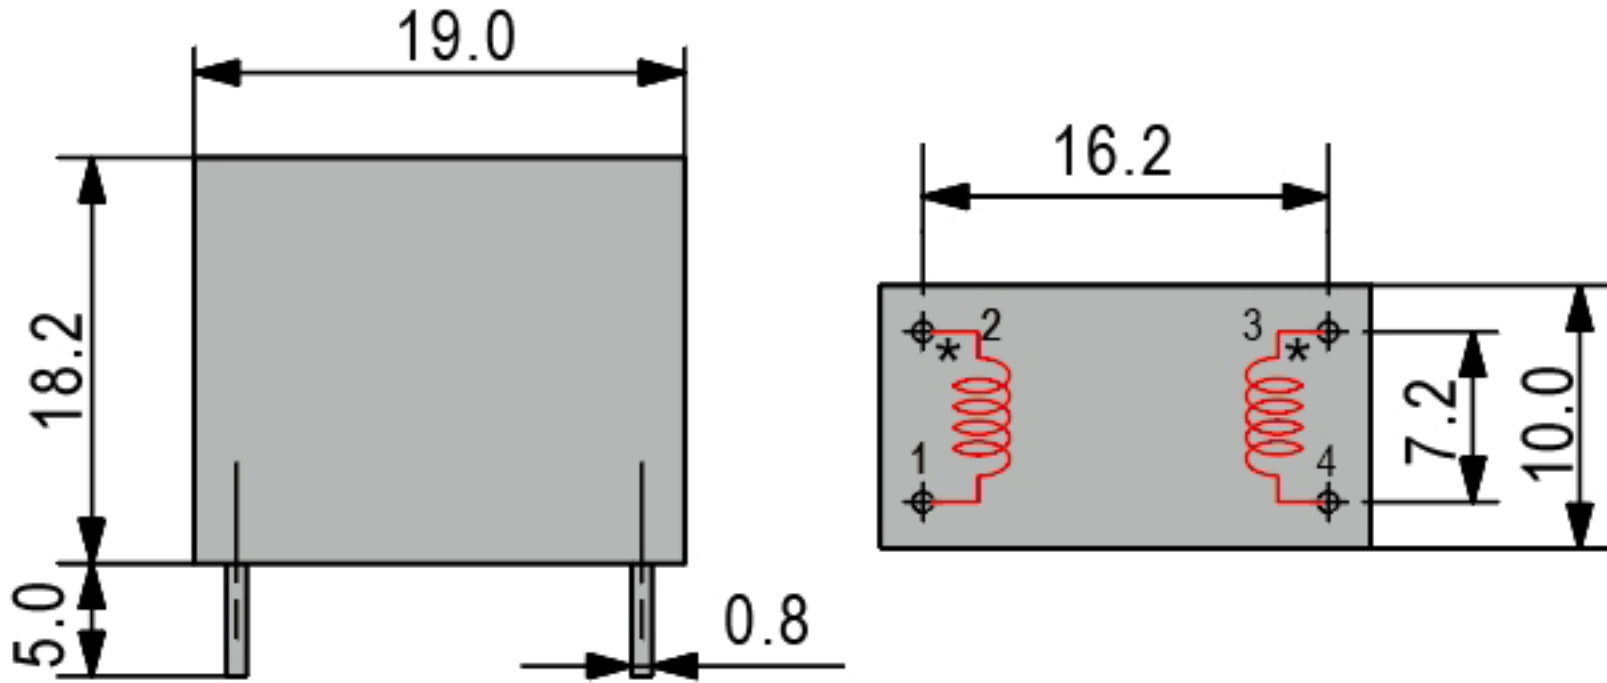
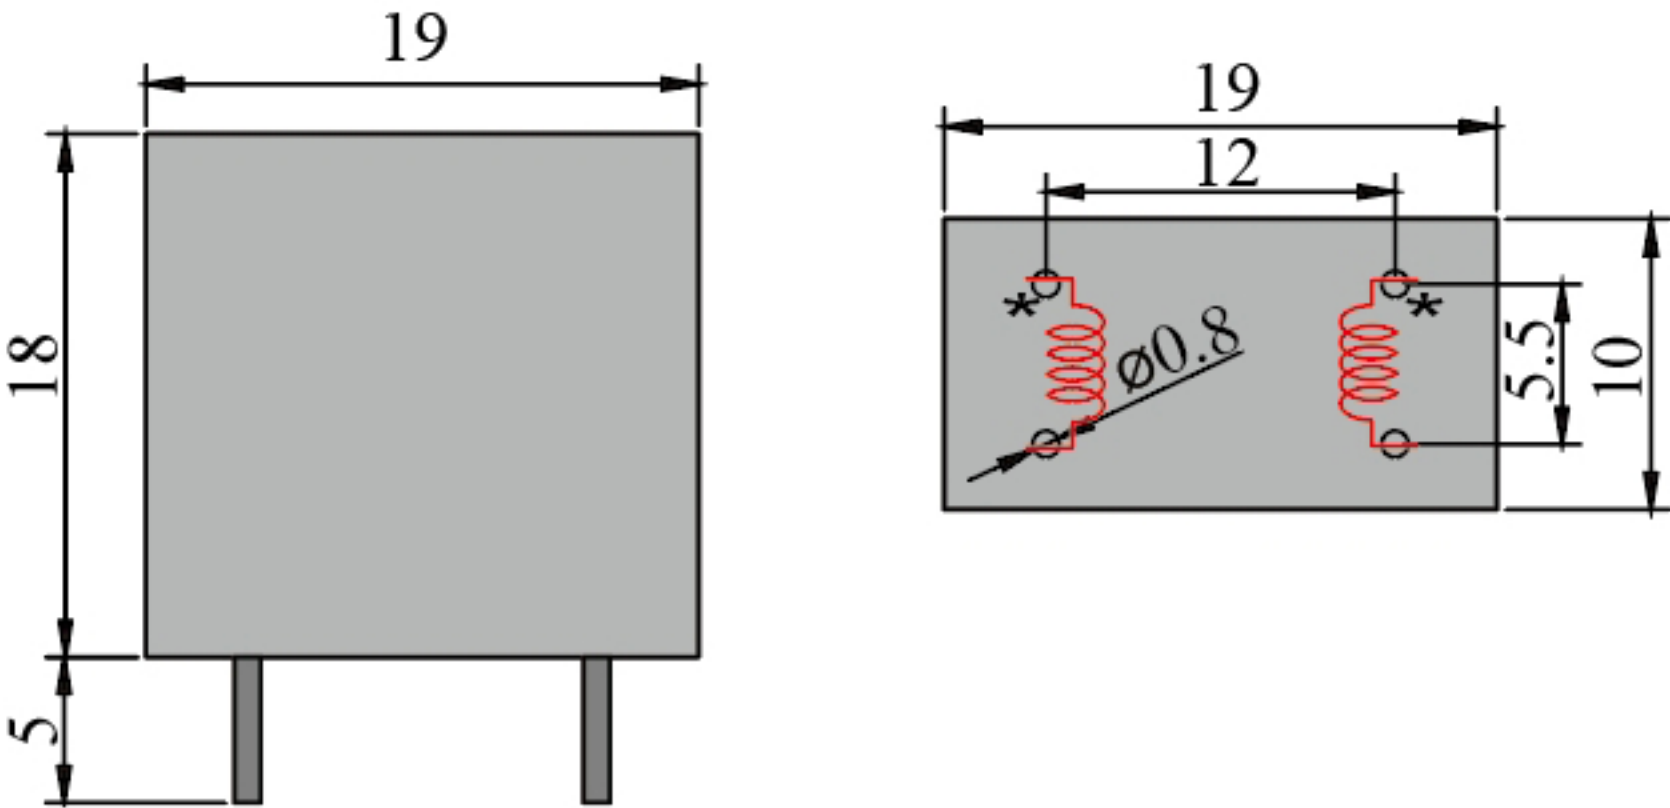
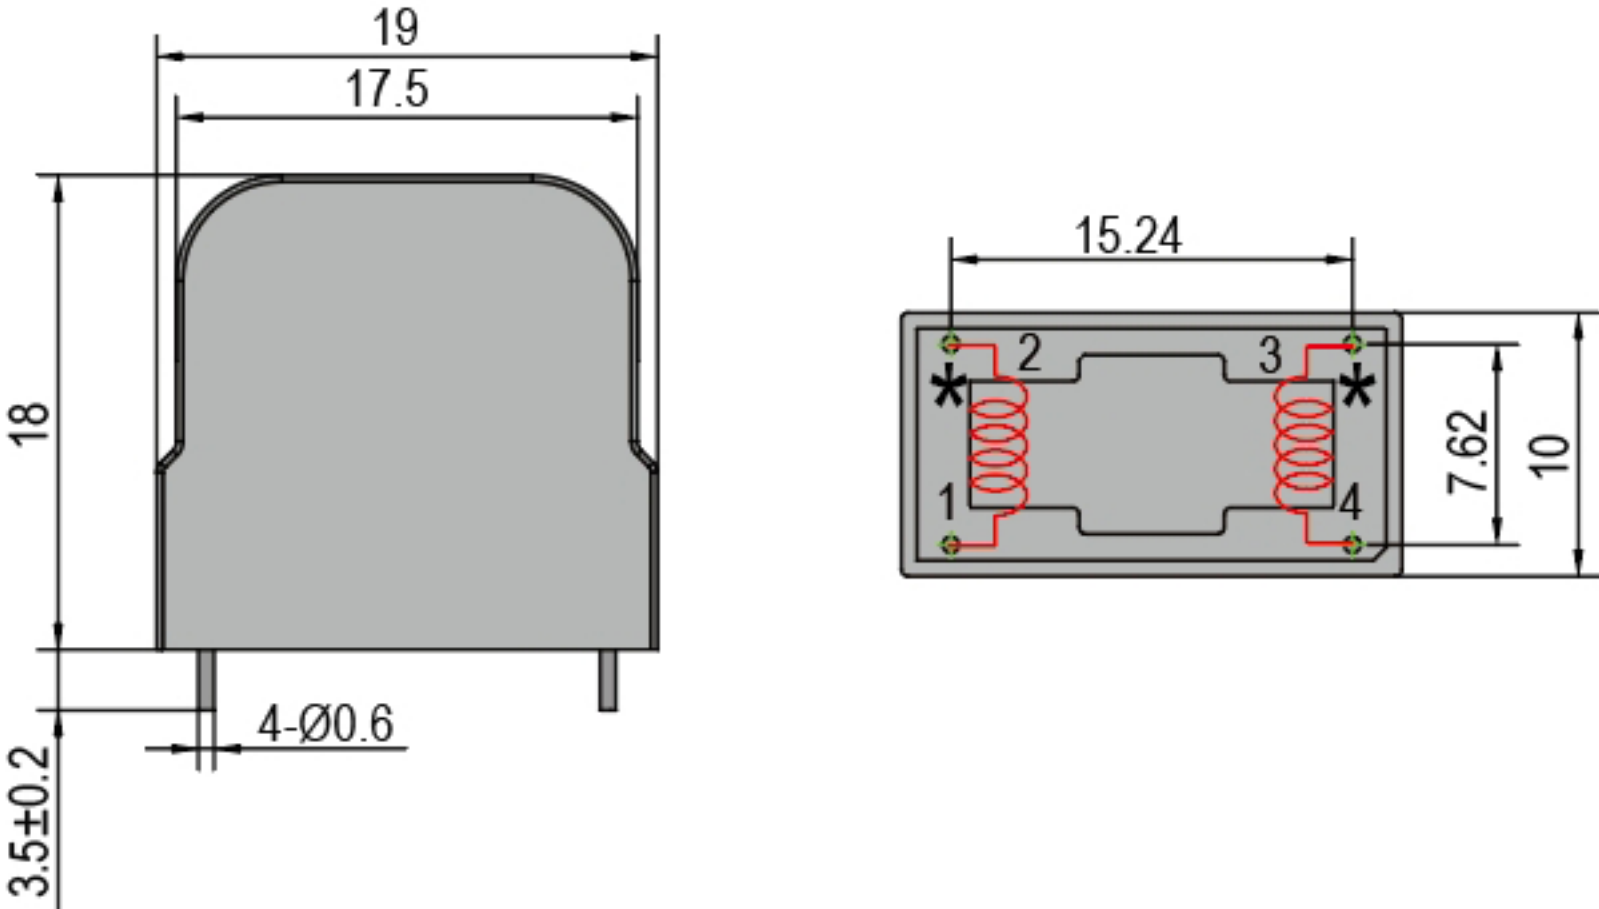


MODEL NUMBER	PT232161	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing shows two views of the PT232161 transformer. The front view (left) shows a rectangular core with a width of 19.5 and a height of 18.2. The mounting base has a width of 4.0 and a height of 0.8. The top view (right) shows the same core with a width of 19.5 and a height of 18.0. The internal winding is shown in red, with terminals 1, 2, 3, and 4. The winding is connected in a center-tapped configuration, with terminals 1 and 4 at the ends and terminals 2 and 3 at the center. The distance between terminals 1 and 2 is 14.0, and the distance between terminals 3 and 4 is 12.8. The distance between terminals 1 and 4 is 19.5. The distance between terminals 2 and 3 is 14.0. The winding is connected in a center-tapped configuration, with terminals 1 and 4 at the ends and terminals 2 and 3 at the center. The distance between terminals 1 and 2 is 14.0, and the distance between terminals 3 and 4 is 12.8. The distance between terminals 1 and 4 is 19.5. The distance between terminals 2 and 3 is 14.0.	

MODEL NUMBER	PT232361	
RATED INPUT	1 mA	2mA
RATED OUTPUT	1 mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 500\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing consists of two views of the PT232361 transformer. The left view is a front elevation showing a rectangular body with a width of 19.5 and a height of 18.9. Two mounting pins are shown at the base, with a dimension of 5 indicating the distance from the bottom edge to the top of the pins. The right view is a top-down plan view of the transformer. It shows a square footprint with an outer dimension of 19.5 and an inner square area of 10 by 10. The total height of the component, including the mounting pins, is 17. The height of the main body is 12.8. The plan view shows two primary windings (red coils) on the left and right sides. The left winding has terminals 1 and 2, and the right winding has terminals 3 and 4. There are also two terminals marked with an asterisk (*) at the top. A dimension of $\varnothing 0.8$ indicates the diameter of the mounting holes.	

MODEL NUMBER	PT232461	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the PT232461 sensor. It includes a top view and a side view. The top view shows a rectangular component with a width of 19.0 and a height of 18.2. The side view shows a rectangular component with a width of 16.2 and a height of 10.0. The sensor has two input terminals (1 and 2) and two output terminals (3 and 4). The input terminals are located on the left side, and the output terminals are located on the right side. The sensor is mounted on a base with a thickness of 5.0 and a width of 0.8.	

MODEL NUMBER	PT232561	
RATED INPUT	1 mA	2mA
RATED OUTPUT	1 mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing consists of two views of a rectangular component. The front view (left) shows a rectangle with a width of 19 and a height of 18. Two pins extend from the bottom, with a dimension of 5 from the bottom edge to the top of the pins. The top view (right) shows a rectangle with a width of 19 and a height of 10. It features two red coil-like structures. The distance between the centers of these coils is 12. Each coil has a diameter of $\varnothing 0.8$. The distance from the left edge to the first coil is 5.5, and from the second coil to the right edge is 5.5. There are also asterisks (*) near the top of each coil.	

MODEL NUMBER	PT232661	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawings show the physical dimensions of the PT232661 component. The front view (left) shows a component with a total width of 19mm and a mounting hole diameter of 4-Ø0.6mm. The top view (right) shows a rectangular component with a width of 15.24mm and a height of 10mm, with internal features dimensioned at 17.5mm, 18mm, 3.5±0.2mm, 7.62mm, and 19mm.	