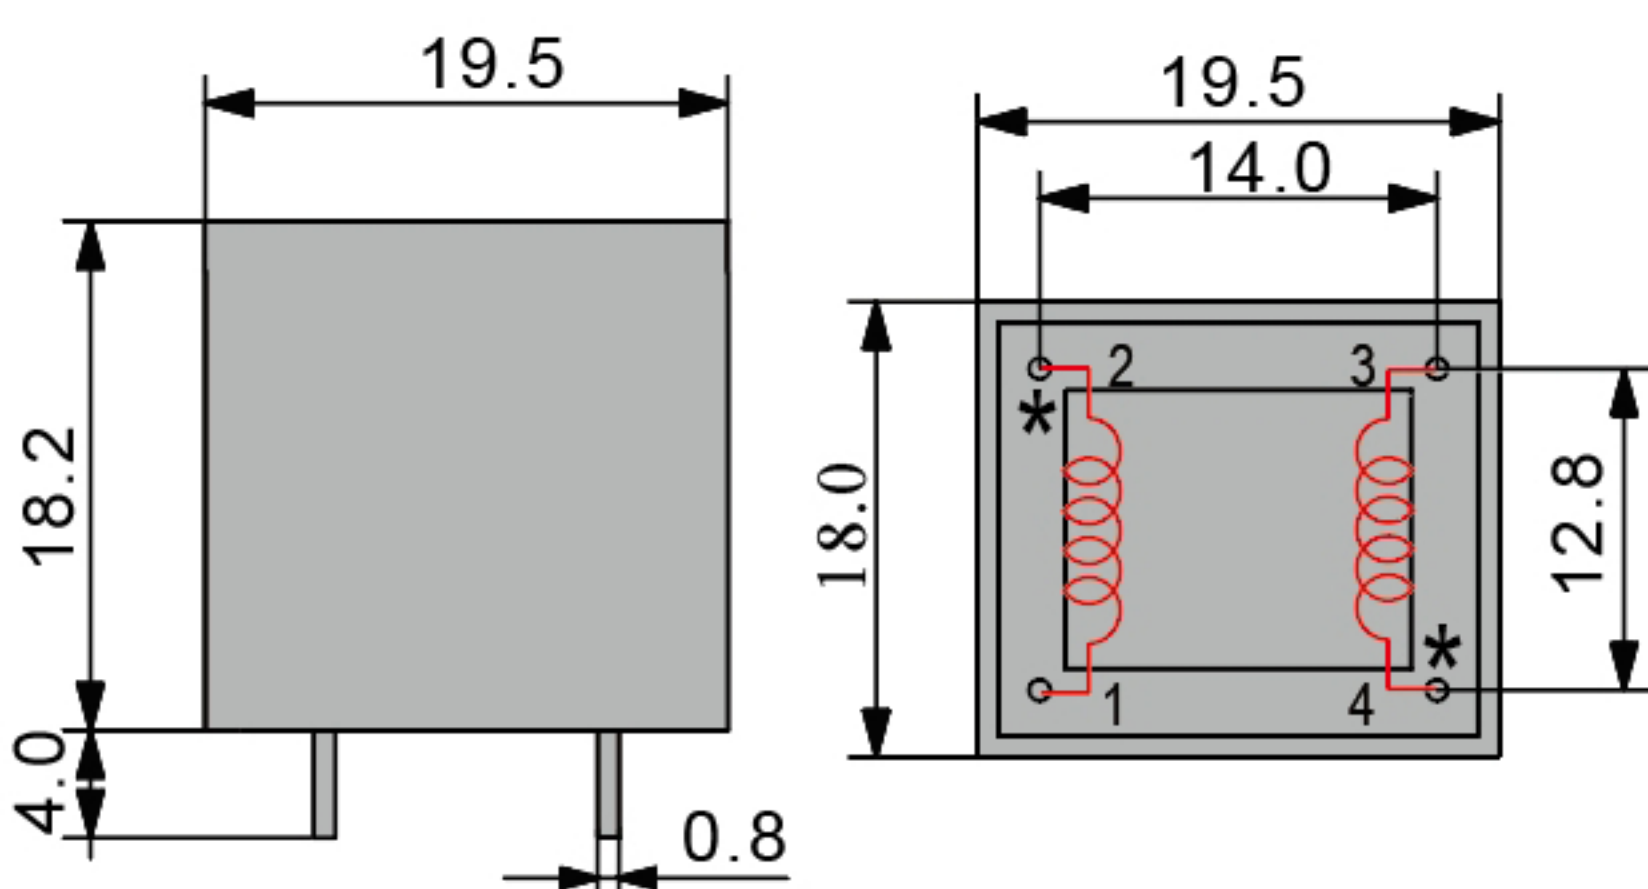
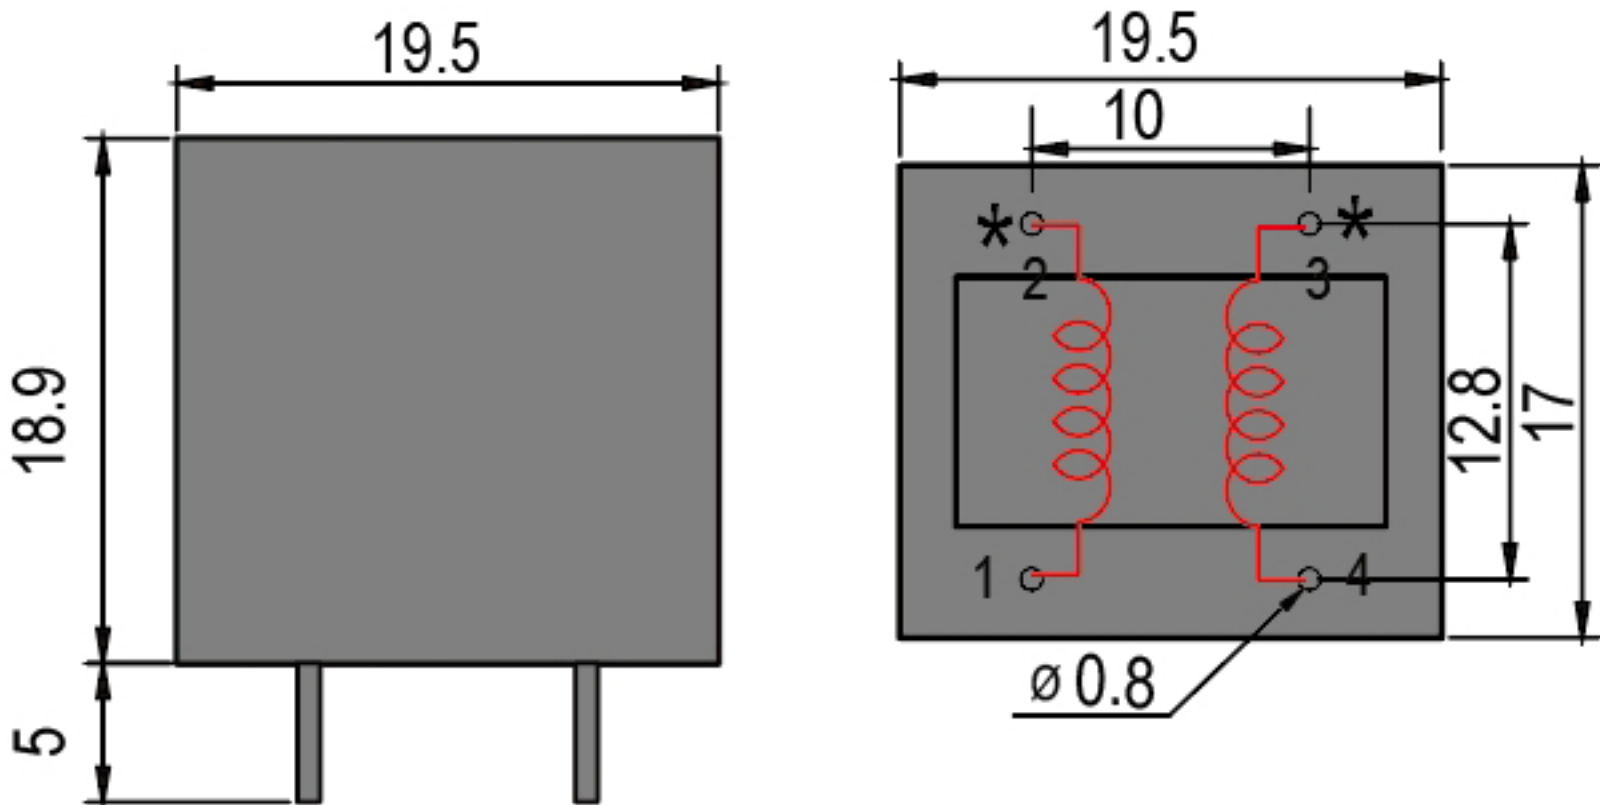
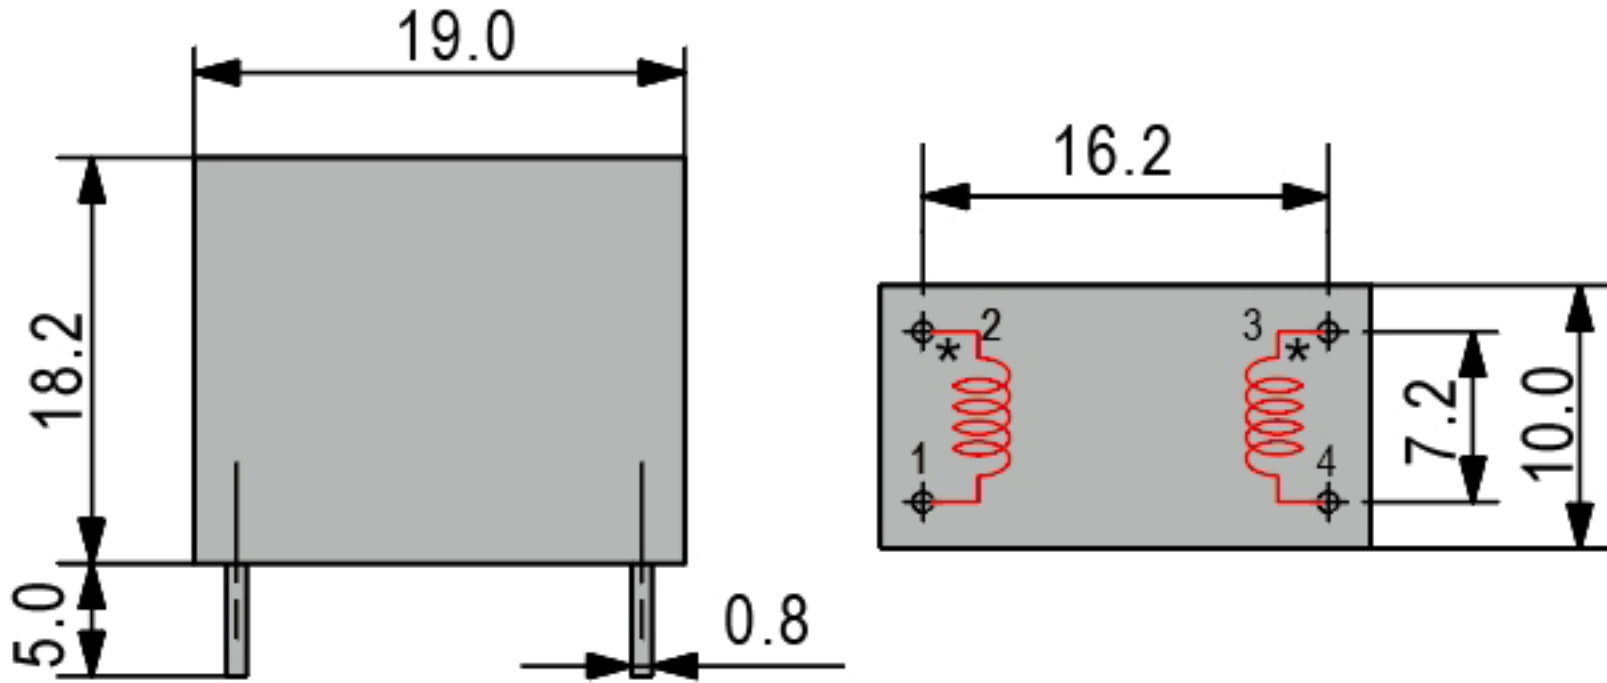
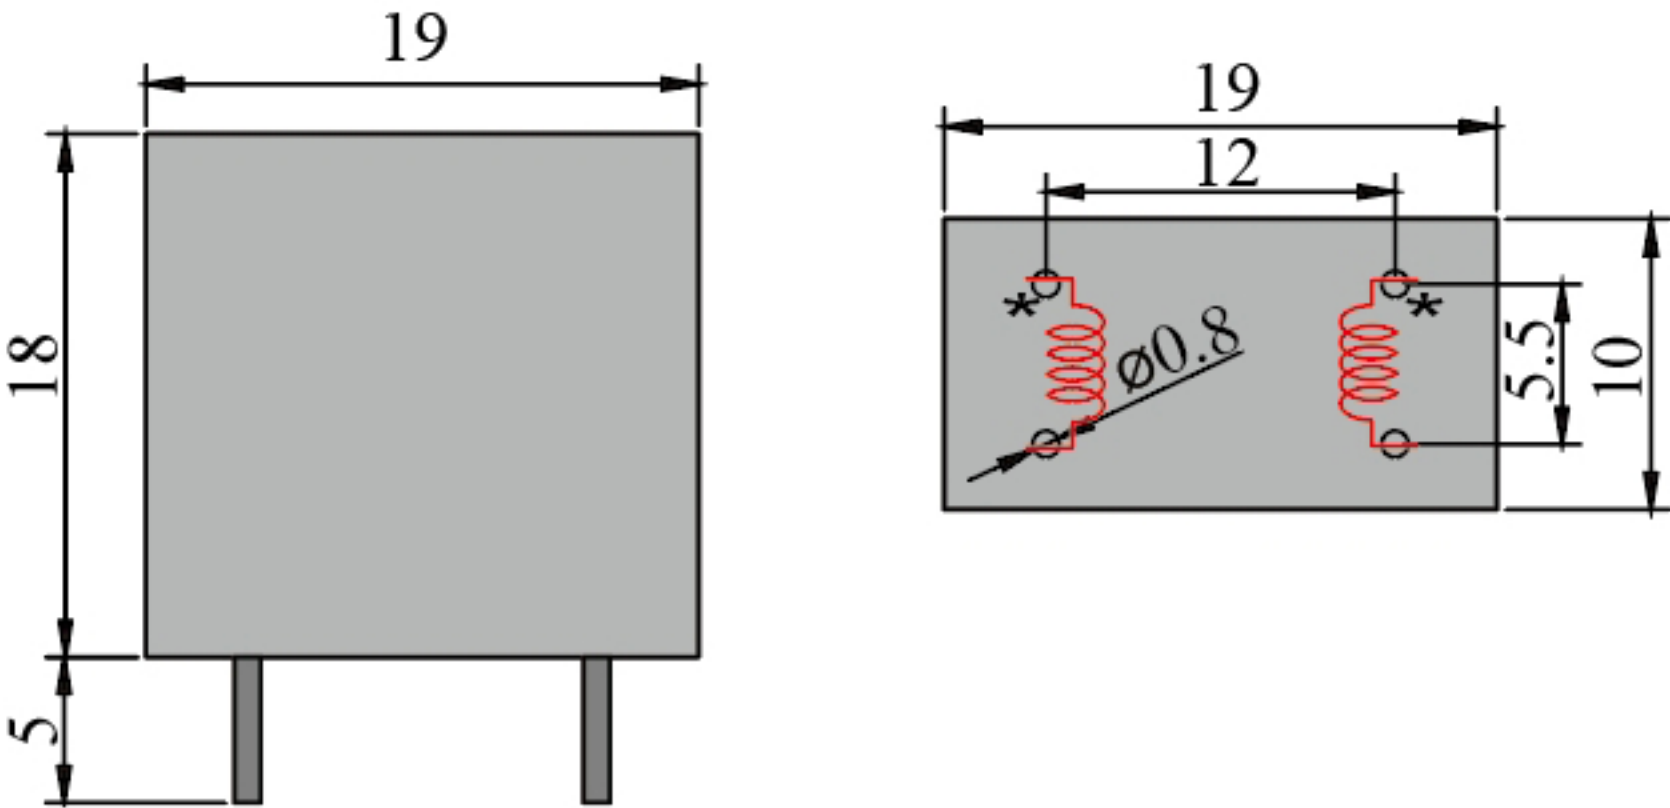
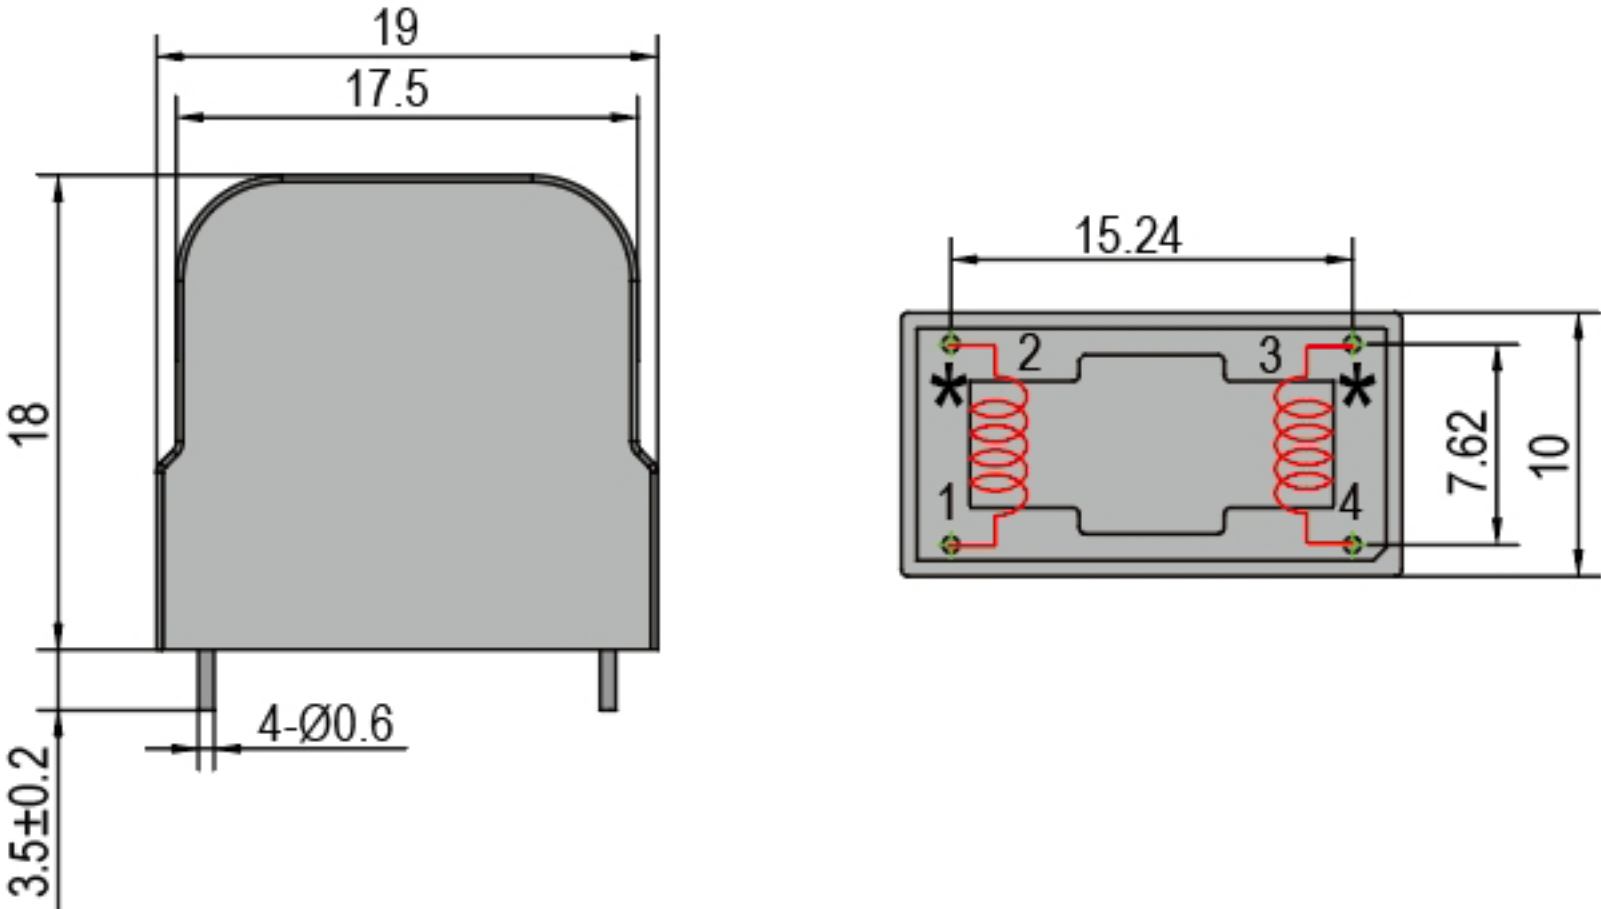



MODEL NUMBER	PT232161	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing shows two views of the PT232161 transformer. The front view (left) shows a rectangular core with a width of 19.5 and a height of 18.2. The mounting base has a width of 4.0 and a height of 0.8. The top view (right) shows the same core with a width of 19.5 and a height of 18.0. The internal winding is shown in red, with terminals 1, 2, 3, and 4. The winding is connected in a center-tapped configuration, with terminals 1 and 4 at the ends and terminals 2 and 3 at the center. The distance between terminals 1 and 2 is 14.0, and the distance between terminals 3 and 4 is 12.8. The distance between terminals 1 and 4 is 19.5.	


MODEL NUMBER	PT232361	
RATED INPUT	1 mA	2mA
RATED OUTPUT	1 mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 500\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing consists of two views of the PT232361 transformer. The left view is a front elevation showing a rectangular core with a width of 19.5 and a height of 18.9. Two mounting pins are shown at the bottom, with a dimension of 5 indicating the distance from the bottom edge of the core to the top of the pins. The right view is a top-down plan view of the transformer. It shows a square core with an outer dimension of 19.5 by 17. The inner square window has a side length of 12.8. The distance between the two vertical legs of the core is 10. Four terminals are labeled: 1 and 2 on the left leg, and 3 and 4 on the right leg. Terminals 2 and 3 are marked with an asterisk (*). The wire for the primary and secondary windings is shown in red. A dimension of $\varnothing 0.8$ indicates the diameter of the mounting holes.	

MODEL NUMBER	PT232461	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the PT232461 sensor. It includes a top view and a side view. The top view shows a rectangular body with a width of 19.0 and a height of 18.2. The side view shows a rectangular body with a width of 16.2 and a height of 10.0. The sensor has two mounting holes, each with a diameter of 5.0. The distance between the centers of the mounting holes is 19.0. The sensor is shown with two electrical leads, each with a length of 16.2. The leads are connected to the sensor body at points 1, 2, 3, and 4. The sensor body is shaded gray, and the electrical leads are shown in red.	

MODEL NUMBER	PT232561	
RATED INPUT	1 mA	2mA
RATED OUTPUT	1 mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawing consists of two views of a rectangular component. The front view (left) shows a rectangle with a width of 19 and a height of 18. Two vertical pins extend from the bottom, with a dimension of 5 from the bottom edge to the top of the pins. The top view (right) shows a rectangle with a width of 19 and a height of 10. The distance between the two pins is 12. Each pin has a red spiral spring-like feature. The diameter of the pins is indicated as $\varnothing 0.8$. The distance from the top edge to the top of the pins is 5.5.	

MODEL NUMBER	PT232661	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 200\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawings show the physical dimensions of the PT232661 component. The front view (left) shows a component with a total width of 19mm and a body width of 17.5mm. The total height is 18mm, with a mounting tab height of 3.5±0.2mm. The base has four mounting holes, each with a diameter of 0.6mm (4-Ø0.6). The top view (right) shows a rectangular component with a length of 15.24mm and a total width of 10mm. The central body width is 7.62mm. The top view also shows the internal coil structure with terminals labeled 1, 2, 3, and 4, and two asterisks (*) indicating specific features.	

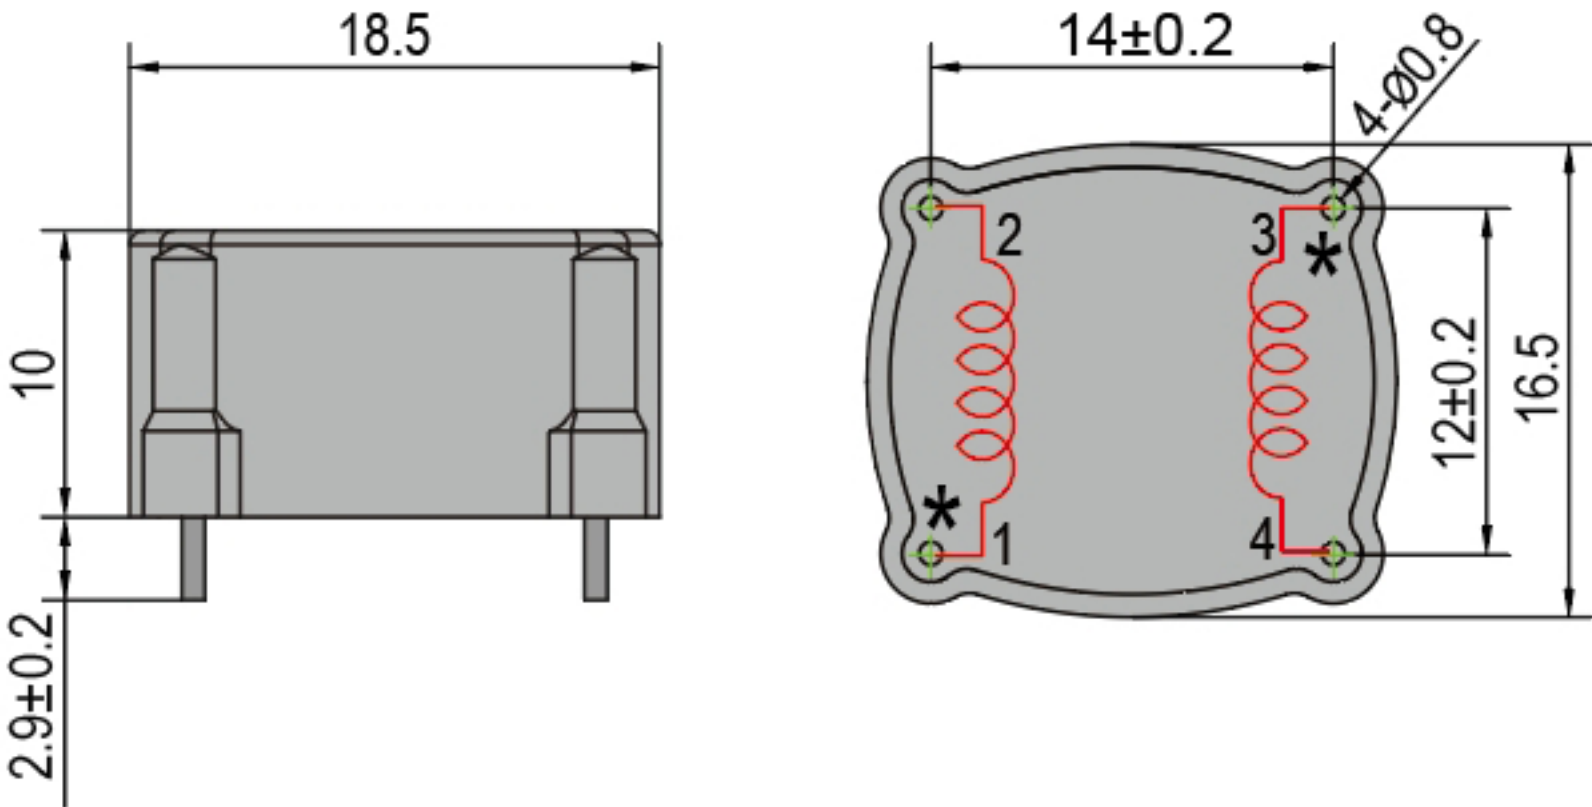MODEL NUMBER	PT232861	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	$\leq 200\Omega$	$\leq 500\Omega$
ACCURACY GRADE	0.1 / 0.2 (RATIO ERROR ONLY)	
DIMENSIONS	 The technical drawings show the physical dimensions of the PT232861 component. The side view (left) indicates a total width of 18.5, a height of 10, and a mounting tab height of 2.9±0.2. The top view (right) shows a rectangular footprint with a width of 14±0.2 and a height of 16.5. The central area has a height of 12±0.2. Four mounting holes are located at the corners, each with a diameter of 0.8 (labeled as 4-Ø0.8). Red winding patterns are visible on the top surface, with terminals labeled 1, 2, 3, and 4. Asterisks (*) mark the center of each winding area.	

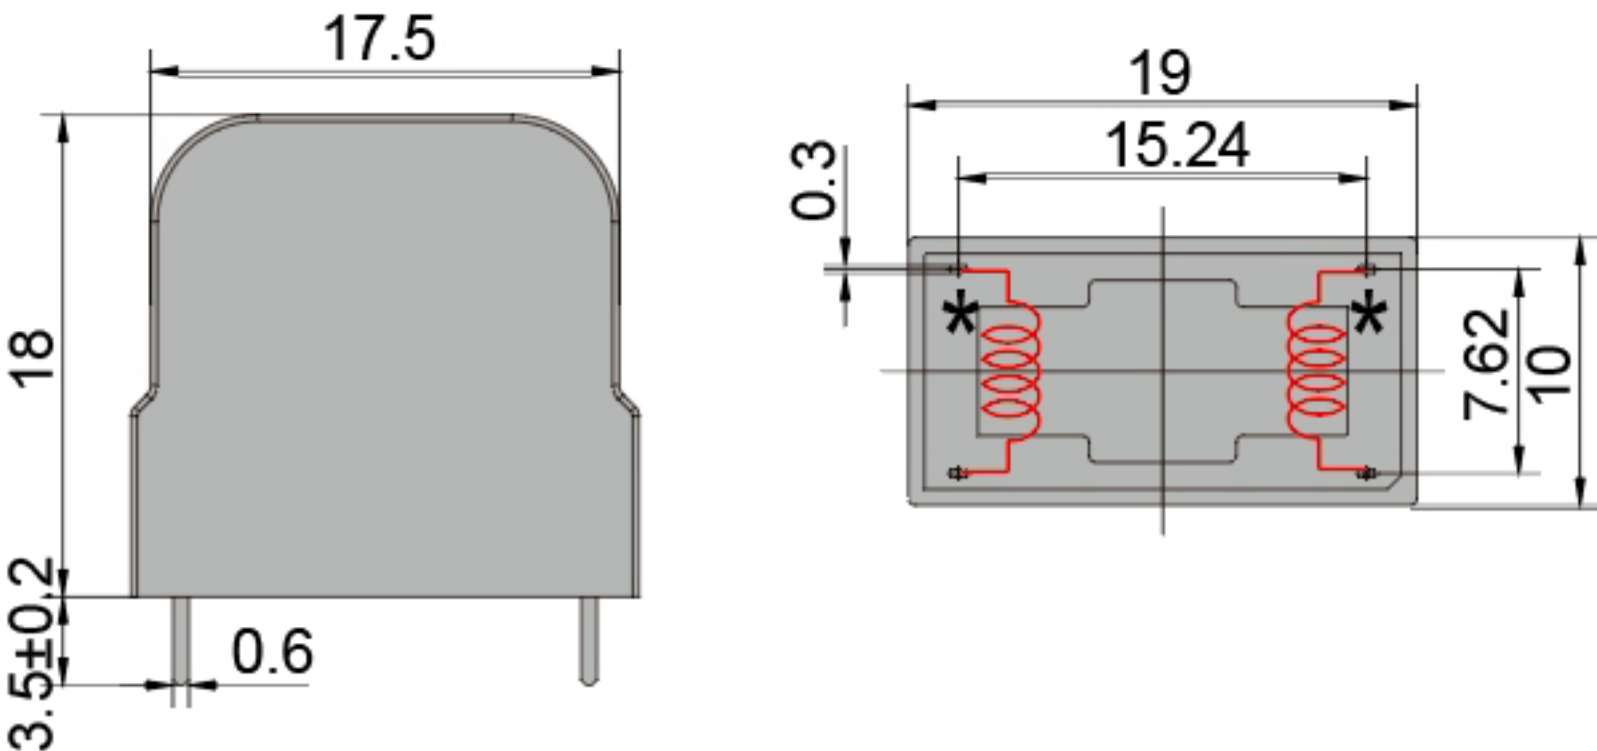MODEL NUMBER	PT232961	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	<200Ω	<200Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 The technical drawings show the physical dimensions of the PT232961 component. The front view (left) shows a component with a width of 17.5, a height of 18, a base thickness of 0.6, and a mounting pad height of 3.5±0.2. The top view (right) shows a rectangular footprint with overall dimensions of 19 by 10. The central sensing area is 15.24 wide and 7.62 deep. Two red coils, marked with asterisks, are located on the top surface. A 0.3 dimension indicates a small offset or gap.	

MODEL NUMBER	PT233061	
RATED INPUT	1mA	2mA
RATED OUTPUT	1mA	2mA
OPTIMAL LOAD	<200Ω	<200Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	