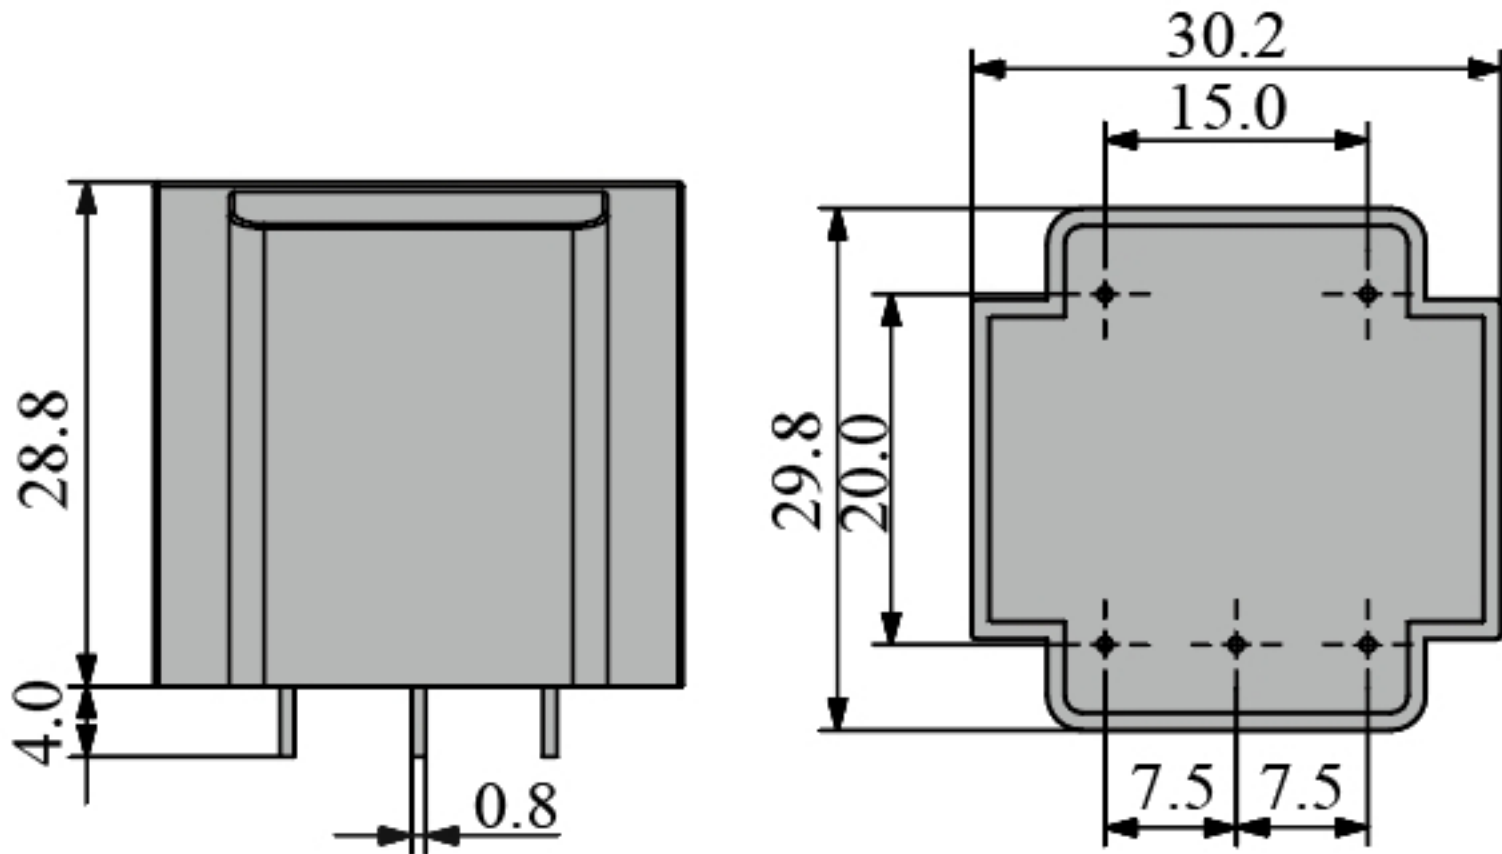
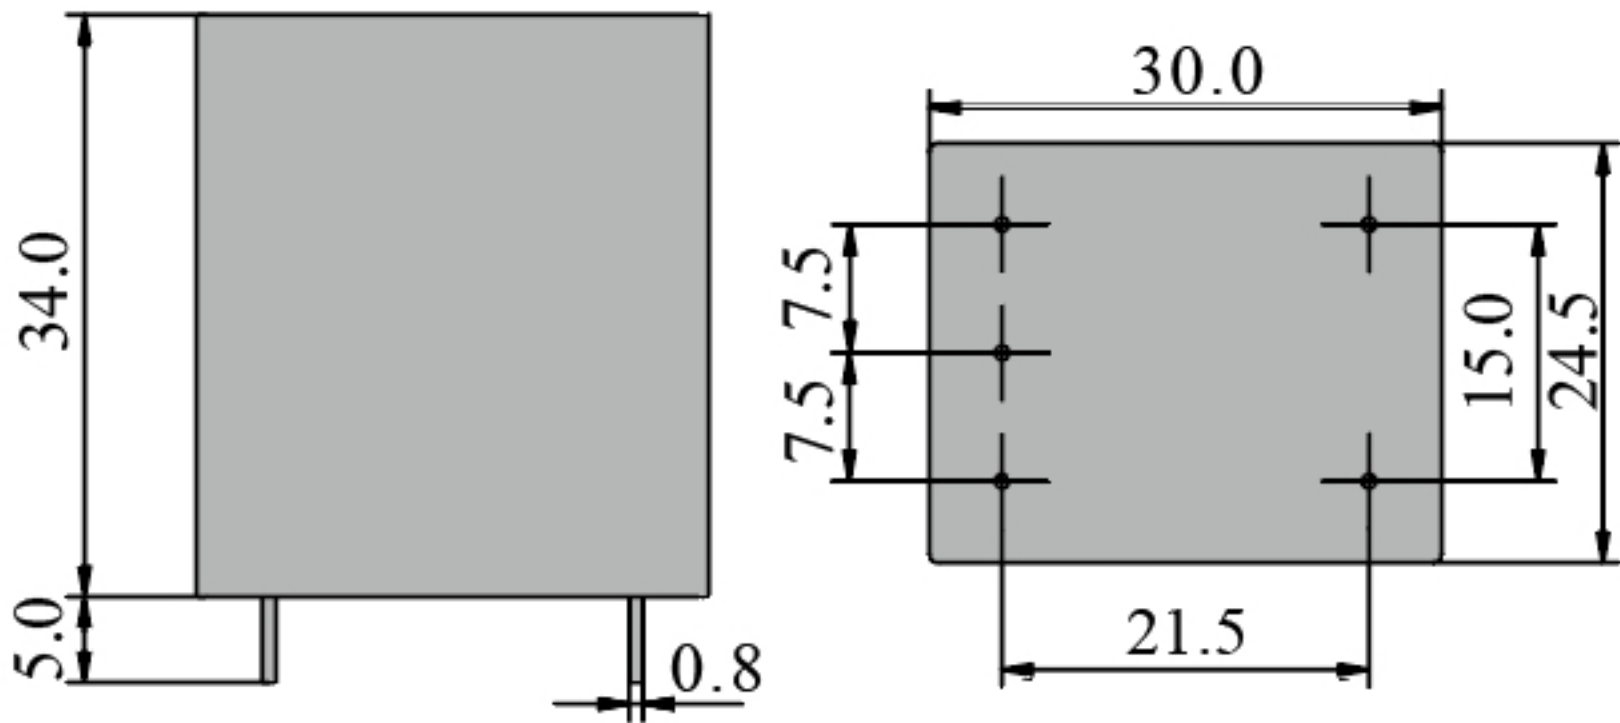


MODEL NUMBER	PT291261/CT291261	
RATED INPUT	0-120V	0-450 V
RATED OUTPUT	7.07V	7.07V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	<u>0.1 / 0.2</u>	0.1 / 0.2
DIMENSIONS	 The image contains two technical drawings of a component. The left drawing is a side view showing a rectangular component with a height of 28.8 and a base width of 4.0. The right drawing is a top view showing a square component with a total width of 30.2 and a total height of 29.8. The top view also shows a central square area with a width of 15.0 and a height of 20.0. The base of the component has four mounting holes, each with a diameter of 0.8. The distance between the centers of the holes is 7.5 on both the horizontal and vertical axes.	

MODEL NUMBER	PT290661/CT290661	
RATED INPUT	0-20A	0-250 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	>100K	>100K
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 Technical drawing of the PT290661/CT290661 module showing front and top views with dimensions. Front View Dimensions: - Height: 34.0 mm - Width: 57.05 mm (labeled as 57.05 mm in the image) - Mounting hole diameter: 0.8 mm - Mounting hole offset from bottom: 5.0 mm Top View Dimensions: - Length: 30.0 mm - Width: 24.5 mm - Mounting hole diameter: 7.5 mm - Mounting hole offset from left: 7.5 mm - Mounting hole offset from right: 7.5 mm - Mounting hole offset from top: 7.5 mm - Mounting hole offset from bottom: 7.5 mm - Internal width: 21.5 mm - Internal height: 15.0 mm	