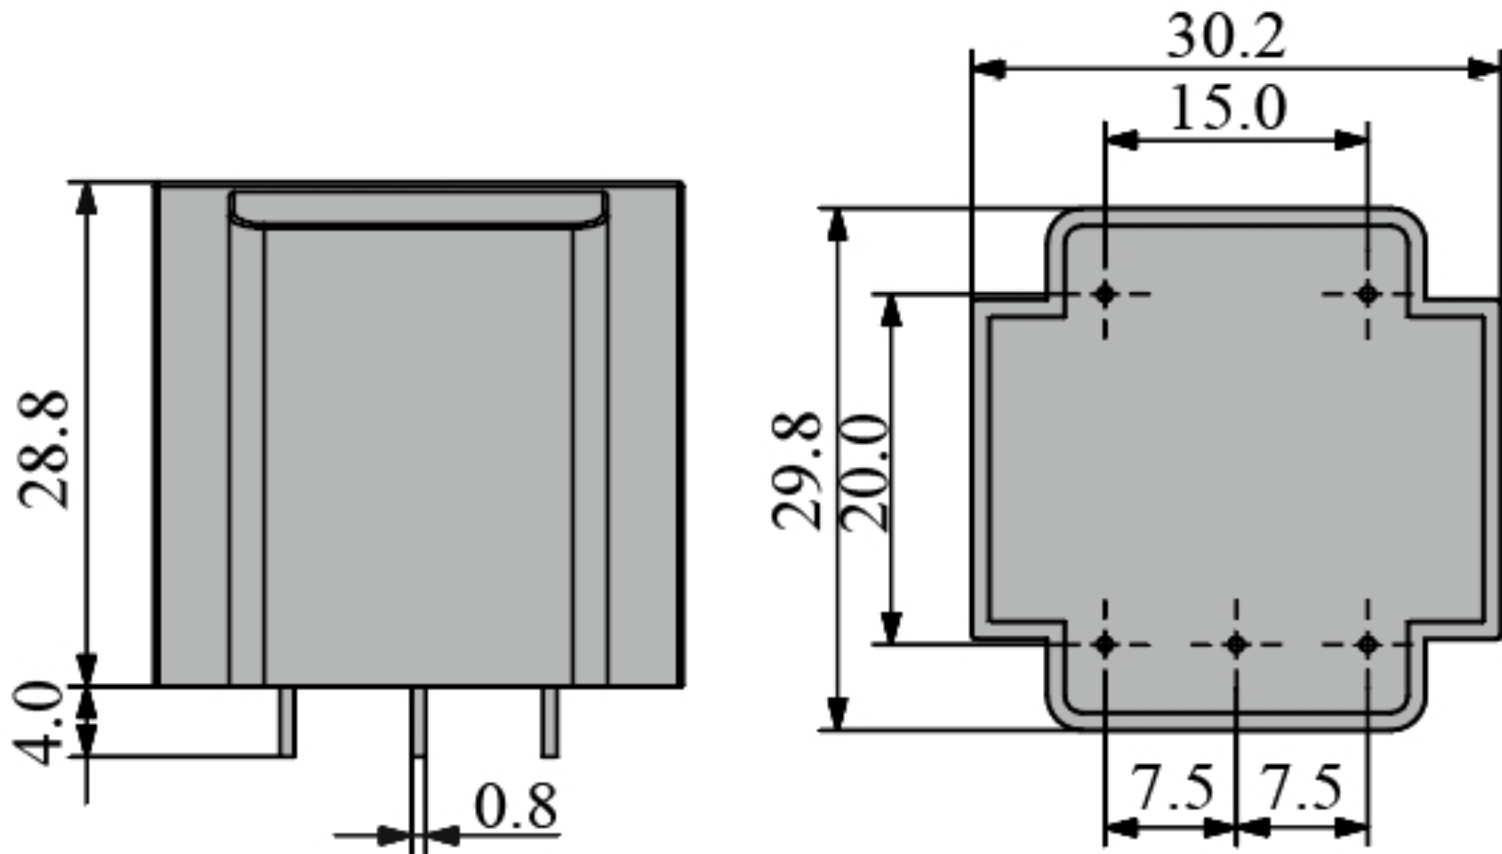
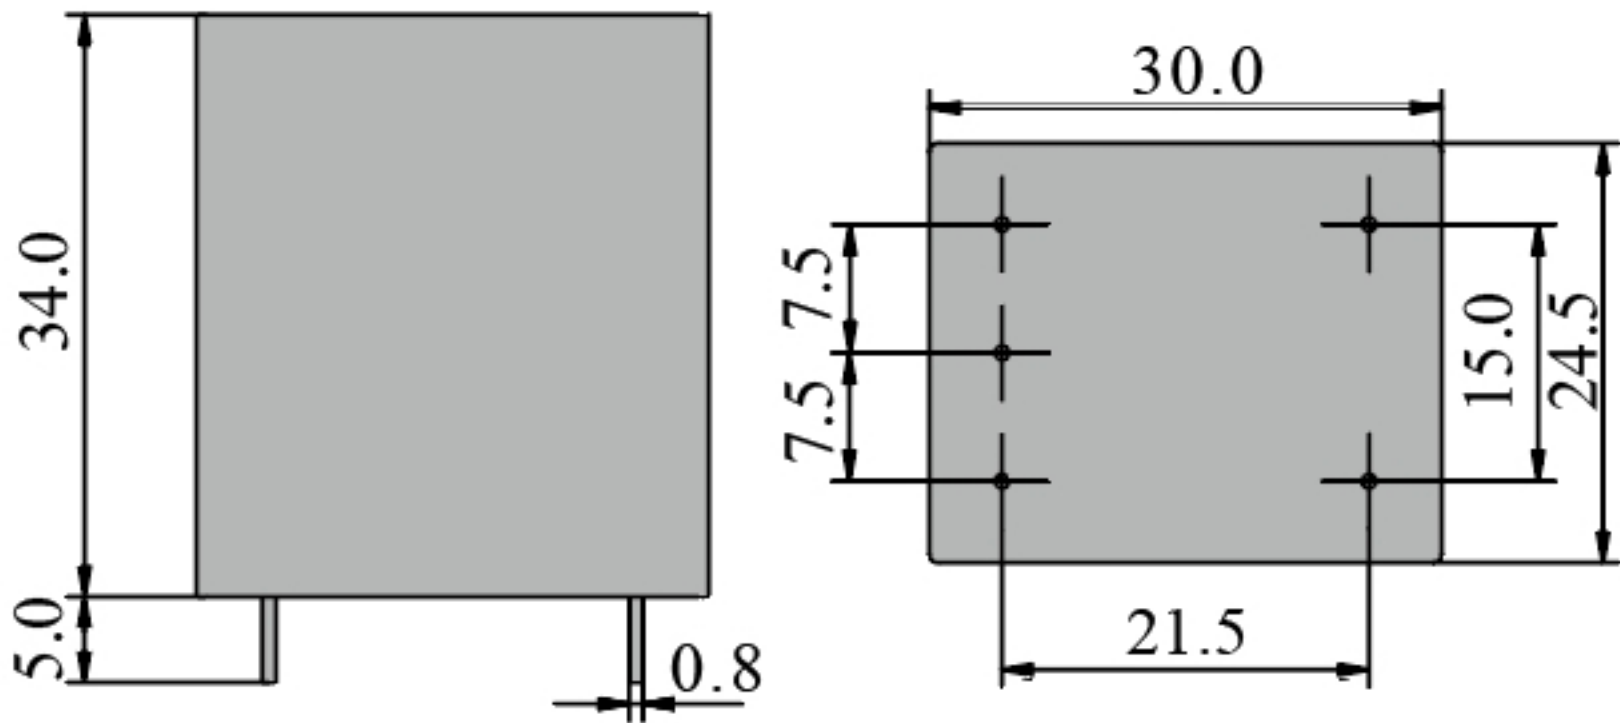
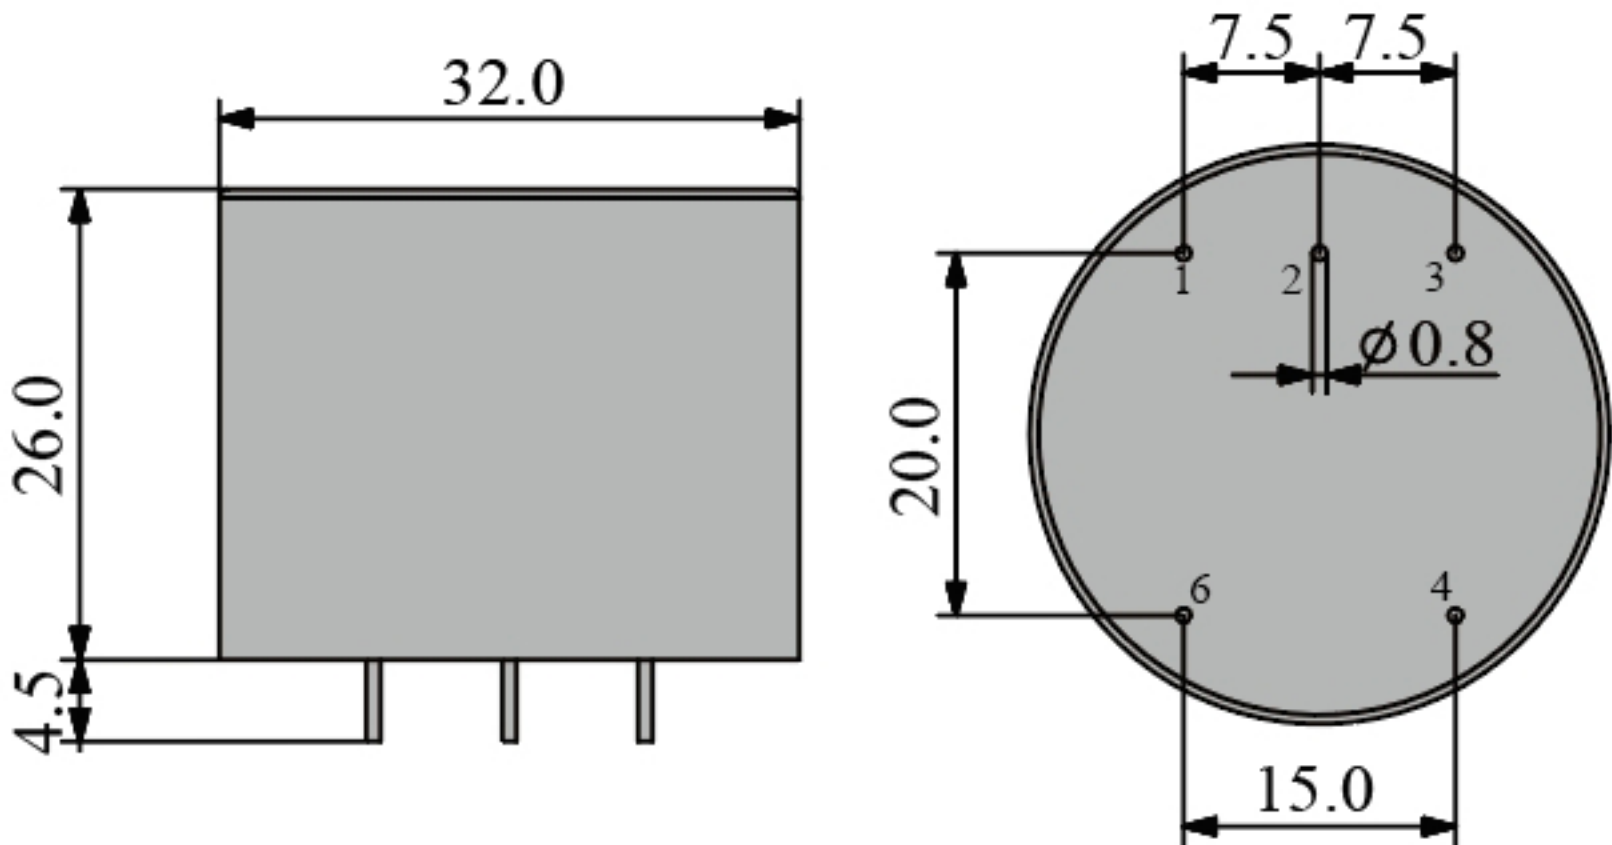


MODEL NUMBER	PT291261/CT291261	
RATED INPUT	0-120V	0-450 V
RATED OUTPUT	7.07V	7.07V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	<u>0.1 / 0.2</u>	0.1 / 0.2
DIMENSIONS	 The technical drawings show the physical dimensions of the component. The side view (left) indicates a total height of 28.8, a base thickness of 4.0, and a central pin width of 0.8. The top view (right) shows an overall width of 30.2 and a central square area with a side length of 15.0. The central area is defined by four mounting holes, each with a diameter of 7.5. The distance from the top edge of the central area to the top of the component is 20.0, and the total height from the base to the top of the component is 29.8.	

MODEL NUMBER	PT290661/CT290661	
RATED INPUT	0-20A	0-250 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	>100K	>100K
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 Technical drawing of the PT290661/CT290661 module showing front and top views with dimensions. Front View Dimensions: - Height: 34.0 mm - Width: 5.0 mm - Mounting hole diameter: 0.8 mm Top View Dimensions: - Length: 30.0 mm - Width: 24.5 mm - Mounting hole diameter: 7.5 mm - Distance between mounting holes: 21.5 mm - Distance from edge to mounting hole: 15.0 mm Anchor point coordinates: X: 57.05 mm, Y: 227.12 mm	

MODEL NUMBER	PT290791/CT290791	
RATED INPUT	0-100A	0-150 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS		

MODEL NUMBER	PT290861/CT290861	
RATED INPUT	0-100A	0-220 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 The technical drawing consists of two views of the sensor. The front view on the left shows a rectangular component with a width of 32.0 and a height of 26.0. Below the main body, there are three mounting pins, with the first one offset by 4.5 from the left edge. The top view on the right shows a circular component with a diameter of 20.0. It features six terminals labeled 1 through 6. Terminals 1, 2, and 3 are at the top, with 1 and 3 spaced 7.5 from the center. Terminals 4 and 6 are at the bottom, spaced 15.0 apart. The distance between terminal 2 and the bottom edge is 20.0. A central hole has a diameter of 0.8.	

MODEL NUMBER	PT290961/CT290961	
RATED INPUT	0-100A	0-450 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	The technical drawing consists of two views: a front view on the left and a top view on the right. The front view shows a rectangular module with a width of 36.0 mm and a height of 34.0 mm. It has three mounting pins at the bottom, with a 4.0 mm gap from the bottom edge to the top of the pins and a 1.0 mm gap between the pins. The top view shows the module's footprint with an outer square of 36.0 mm by 30.8 mm and an inner square of 24.0 mm by 20.0 mm. Six mounting holes are located at the corners of the inner square, with dimensions 10.0 mm and 10.0 mm from the top edge to the first two holes, and 20.0 mm from the bottom edge to the last two holes. The holes are numbered 1 through 6.	