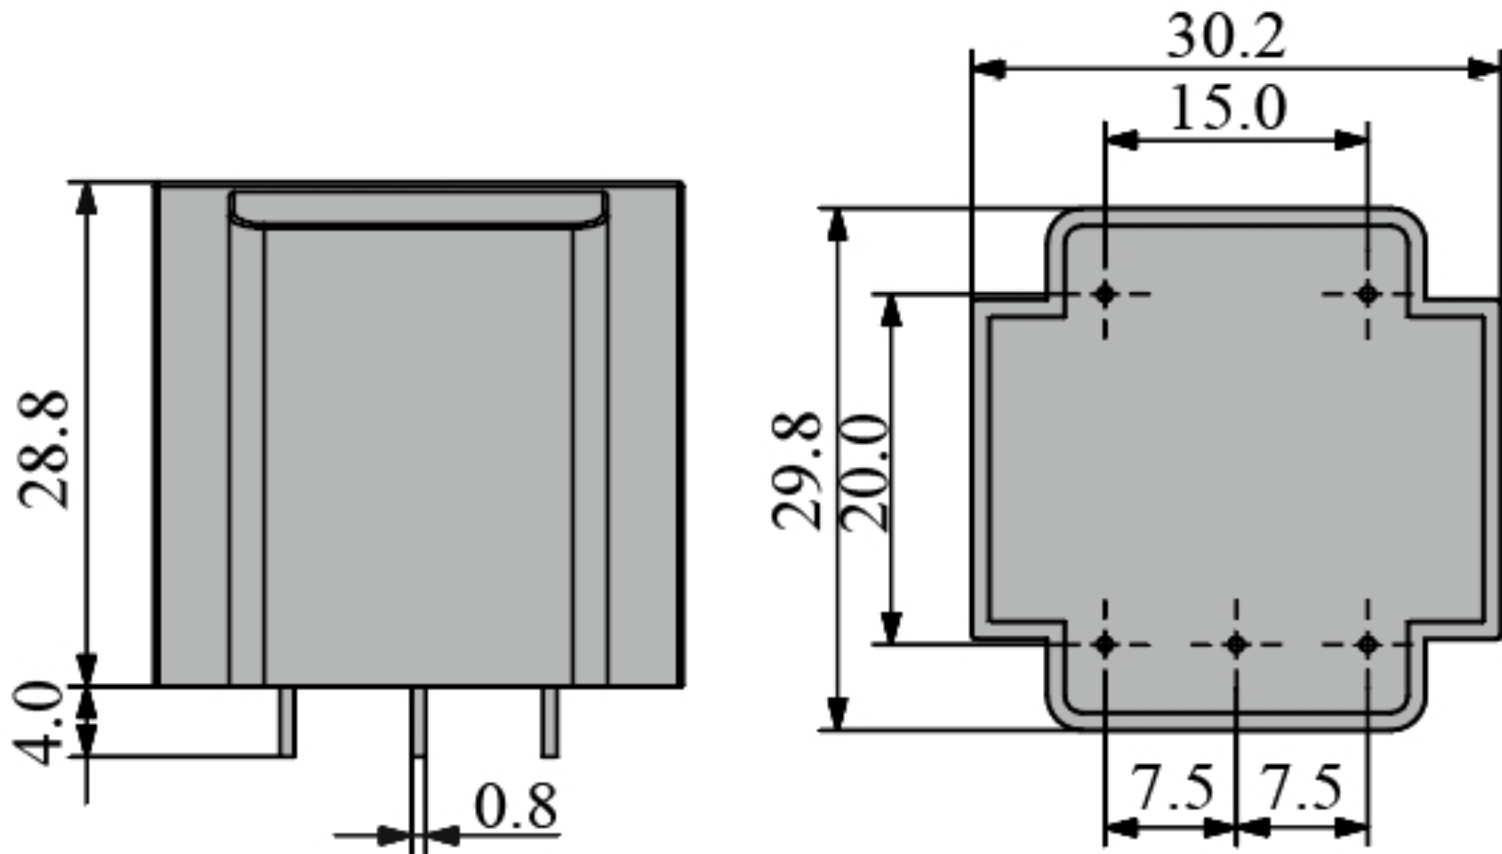
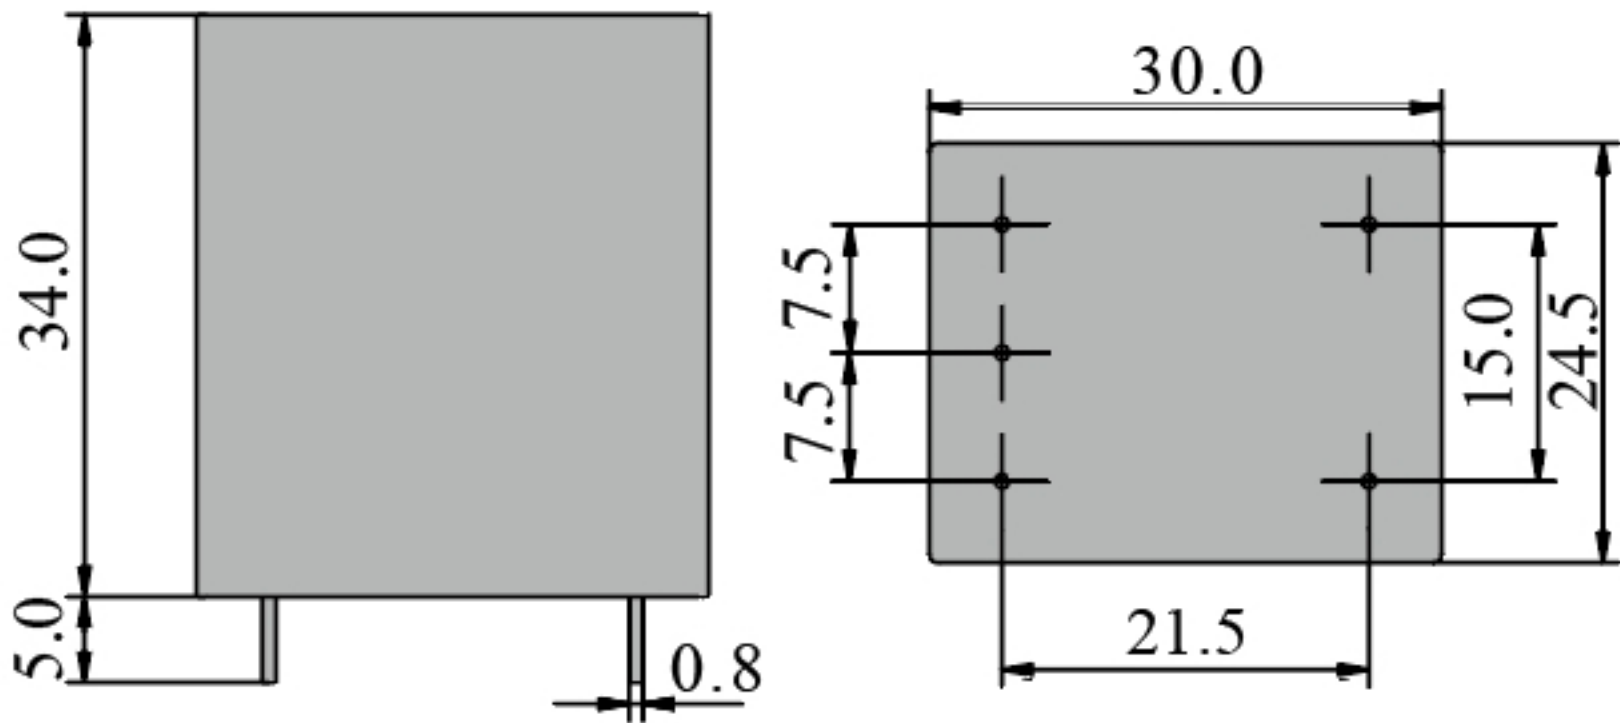
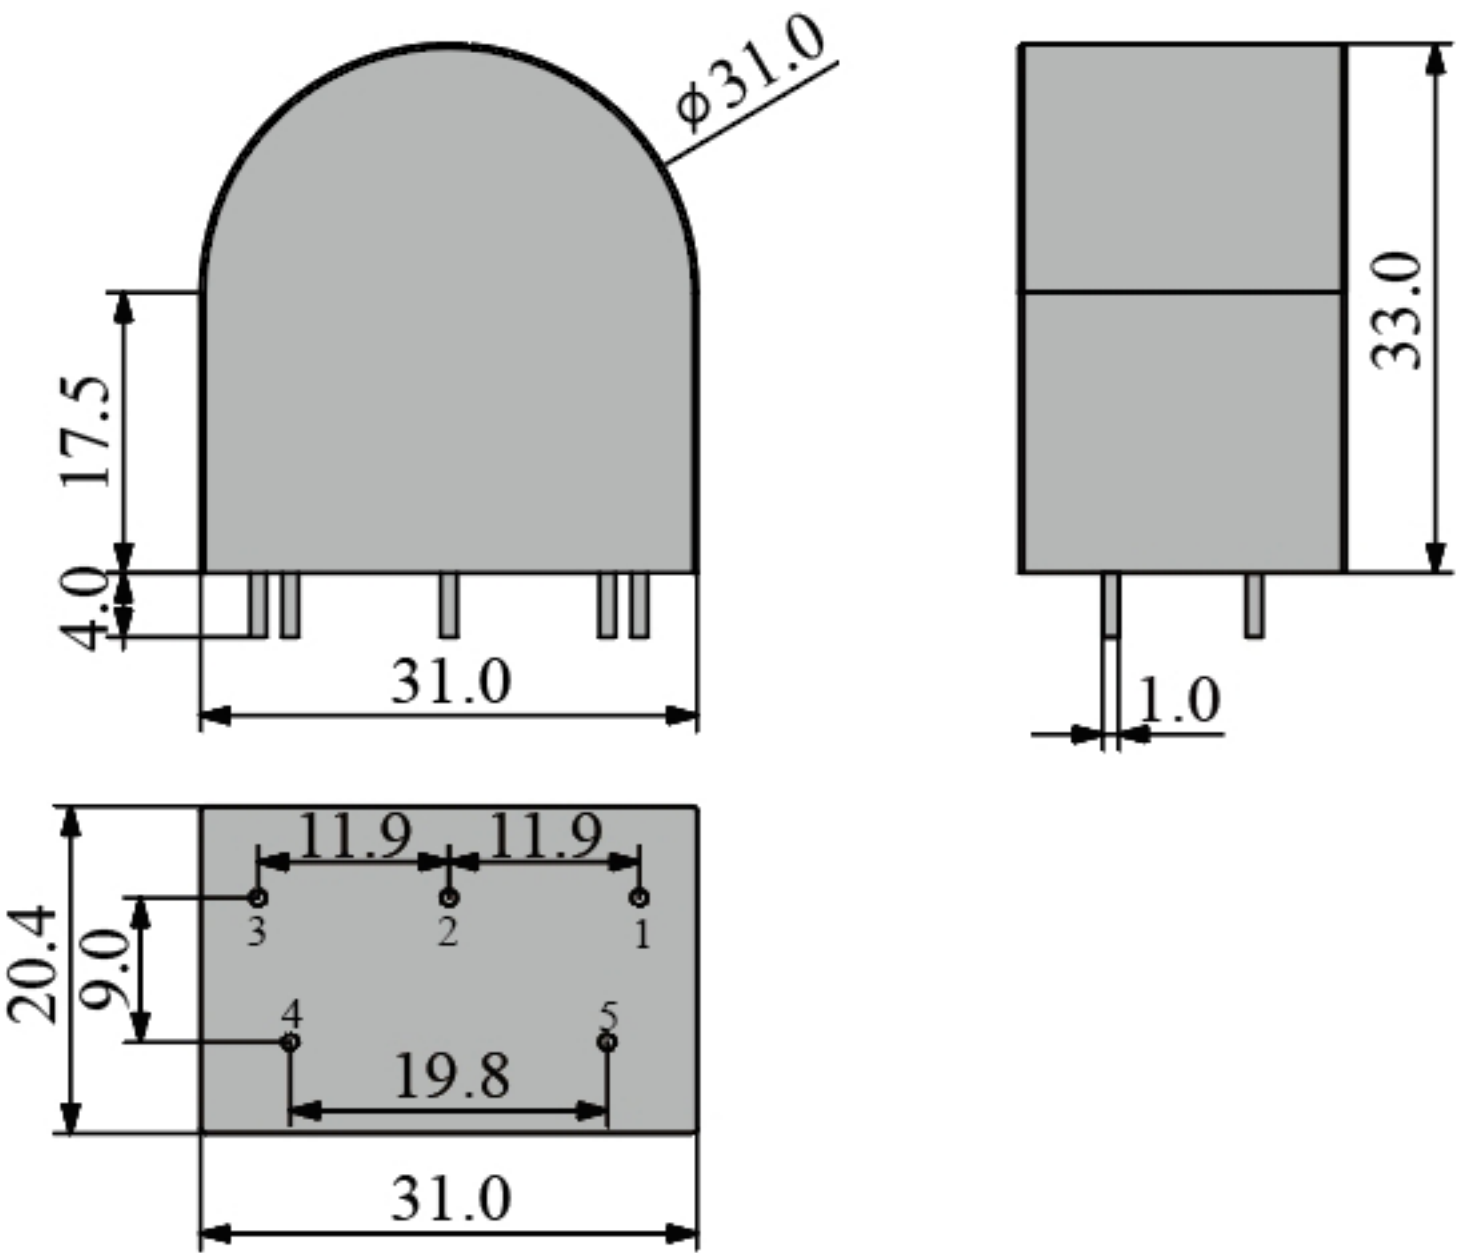
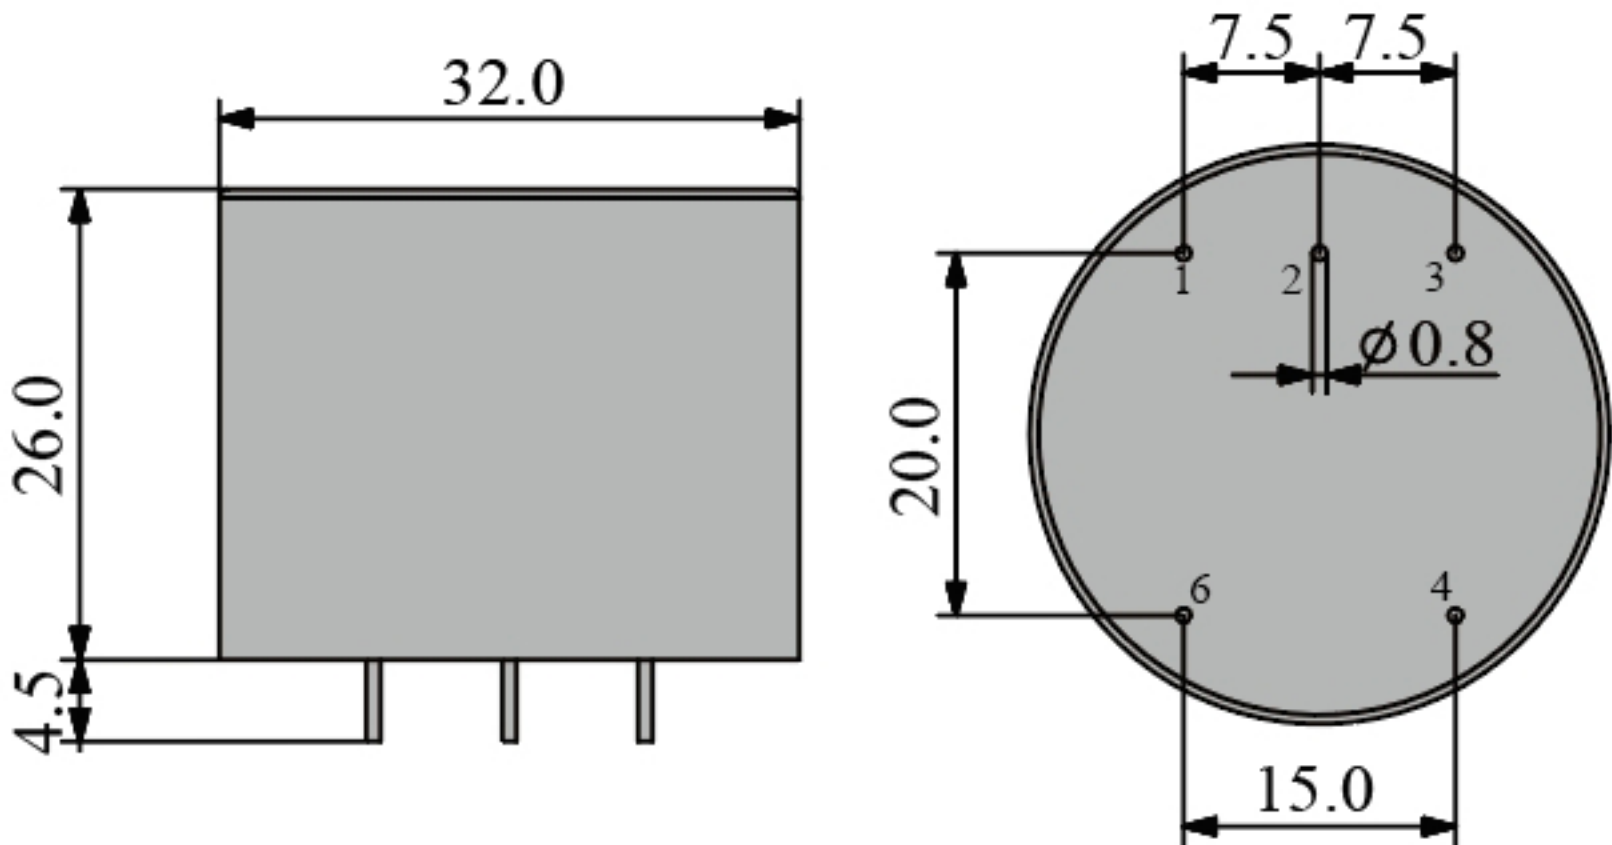
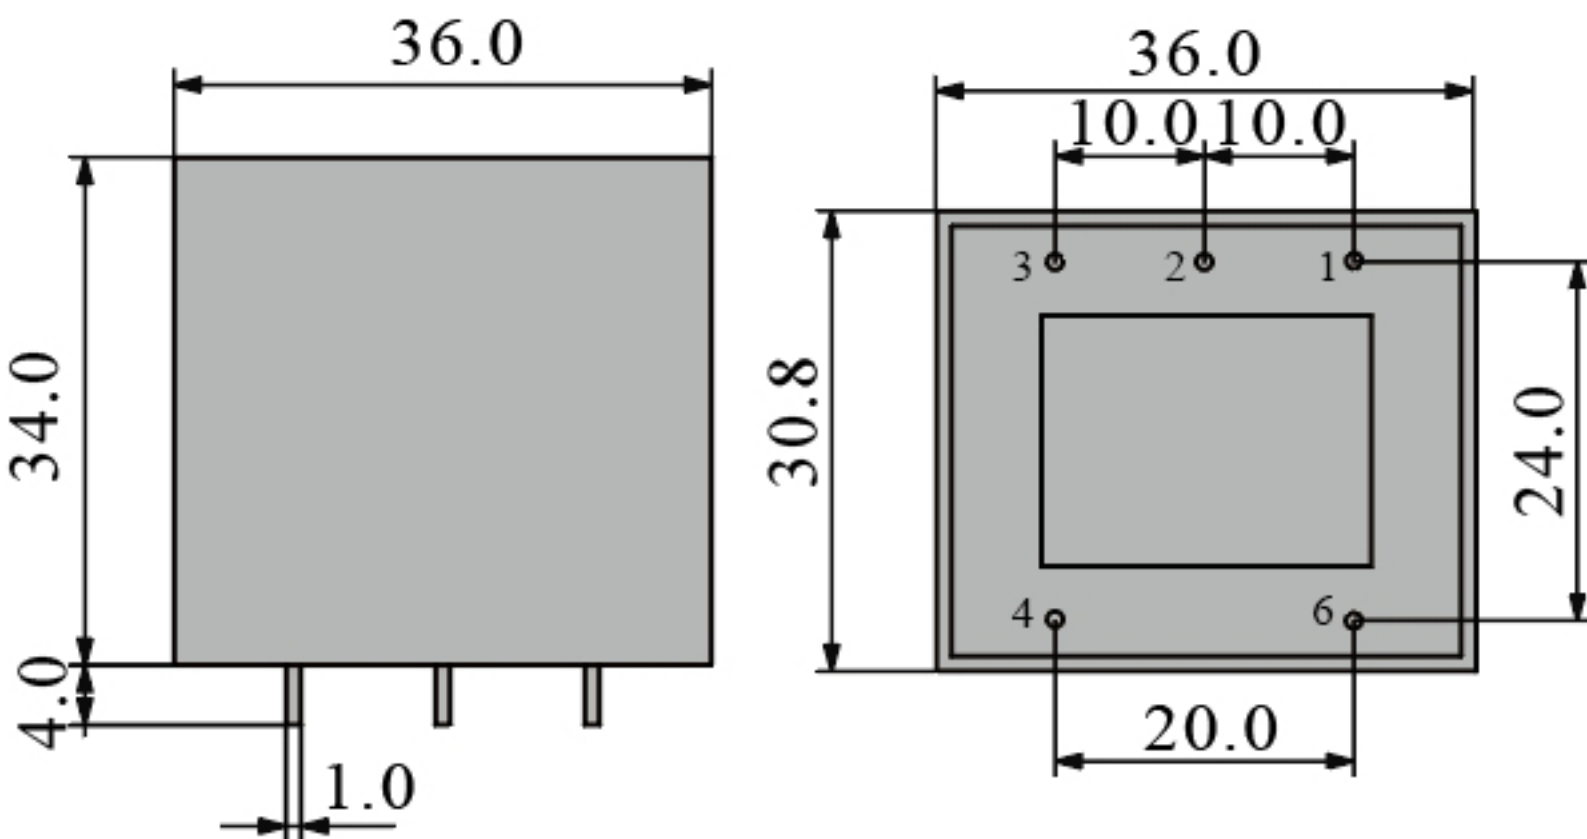



MODEL NUMBER	PT291261/CT291261	
RATED INPUT	0-120V	0-450 V
RATED OUTPUT	7.07V	7.07V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	<u>0.1 / 0.2</u>	0.1 / 0.2
DIMENSIONS	 The technical drawings show the physical dimensions of the component. The side view (left) indicates a total height of 28.8, a base thickness of 4.0, and a central pin width of 0.8. The top view (right) shows an overall width of 30.2 and a central square area with a side length of 15.0. The central area is defined by four mounting holes, each with a diameter of 7.5. The distance from the top edge to the first hole is 20.0, and the distance from the bottom edge to the last hole is 29.8.	


MODEL NUMBER	PT290661/CT290661	
RATED INPUT	0-20A	0-250 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	>100K	>100K
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 Technical drawing of the PT290661/CT290661 module showing front and top views with dimensions. Front View Dimensions: - Height: 34.0 mm - Width: 5.0 mm - Mounting hole diameter: 0.8 mm Top View Dimensions: - Length: 30.0 mm - Width: 24.5 mm - Mounting hole diameter: 7.5 mm - Distance between mounting holes: 15.0 mm - Distance from edge to mounting hole: 7.5 mm - Distance from edge to mounting hole: 21.5 mm Anchor point coordinates: X: 57.05 mm, Y: 227.12 mm	

MODEL NUMBER	PT290791/CT290791	
RATED INPUT	0-100A	0-150 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS		

MODEL NUMBER	PT290861/CT290861	
RATED INPUT	0-100A	0-220 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the sensor. The front view (left) shows a rectangular component with a width of 32.0 and a height of 26.0. A base flange with a thickness of 4.5 is visible at the bottom. The top view (right) shows a circular footprint with an outer diameter of 20.0 and an inner circular feature with a diameter of 0.8. Six mounting holes are distributed around the circular base, with three labeled 1, 2, and 3 at the top, and 4, 5, and 6 at the bottom. The horizontal distance between the center of the base and the center of each hole is 7.5. The distance between the centers of the bottom-most holes (4 and 6) is 15.0.	

MODEL NUMBER	PT290961/CT290961	
RATED INPUT	0-100A	0-450 V
RATED OUTPUT	3.53V	3.53V
OPTIMAL LOAD	-----	-----
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 The technical drawing consists of two views of a rectangular component. The front view (left) shows a rectangle with a width of 36.0 mm and a height of 34.0 mm. Below the rectangle, there are three mounting pins. The distance from the bottom edge of the rectangle to the top of the first pin is 4.0 mm. The distance between the centers of the first and second pins is 1.0 mm. The top view (right) shows a square with a side length of 36.0 mm. Inside this square is a smaller square with a side length of 20.0 mm. The distance from the top edge of the outer square to the top edge of the inner square is 10.0 mm. The distance from the right edge of the outer square to the right edge of the inner square is 10.0 mm. The distance from the bottom edge of the outer square to the bottom edge of the inner square is 24.0 mm. The distance from the left edge of the outer square to the left edge of the inner square is 20.0 mm. There are six mounting holes, numbered 1 through 6, located at the corners of the inner square: 1 (top-right), 2 (top-center), 3 (top-left), 4 (bottom-left), 5 (bottom-center), and 6 (bottom-right).	

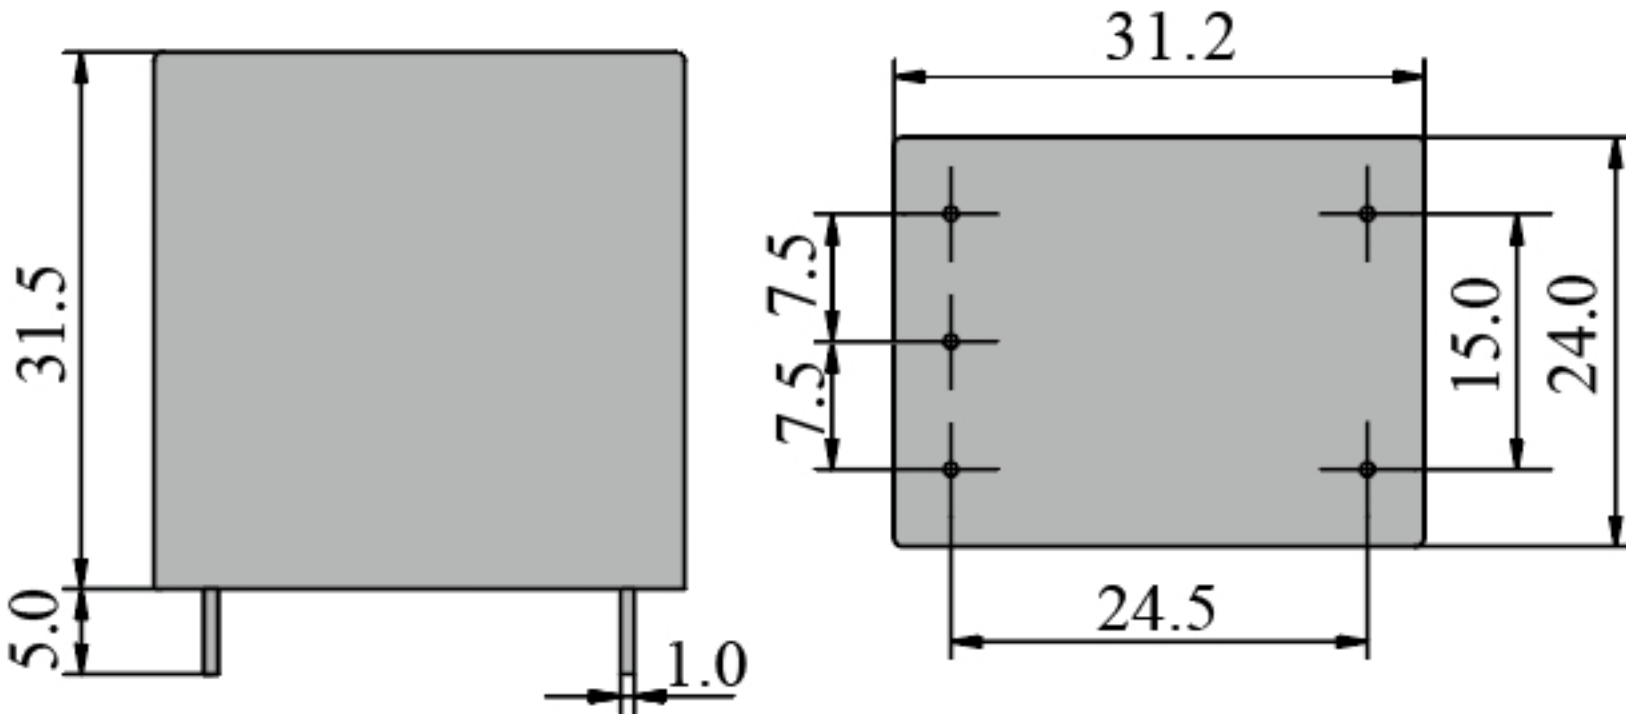MODEL NUMBER	PT291001/CT291001	
RATED INPUT	0-220V	0-450 V
RATED OUTPUT	7.07V	7.07V
OPTIMAL LOAD	----	----
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the PT291001/CT291001 module. It includes two views: a front view on the left and a top view on the right. The front view shows a rectangular module with a height of 31.5 units and a base width of 5.0 units. A small protrusion at the bottom right has a width of 1.0 unit. The top view shows the module's footprint with a length of 31.2 units and a width of 24.5 units. It also indicates a central rectangular area with a width of 24.0 units and a height of 15.0 units. Four mounting holes are positioned at the corners of this central area, with a 7.5 unit spacing from the top and bottom edges and a 7.5 unit spacing from the left and right edges.	

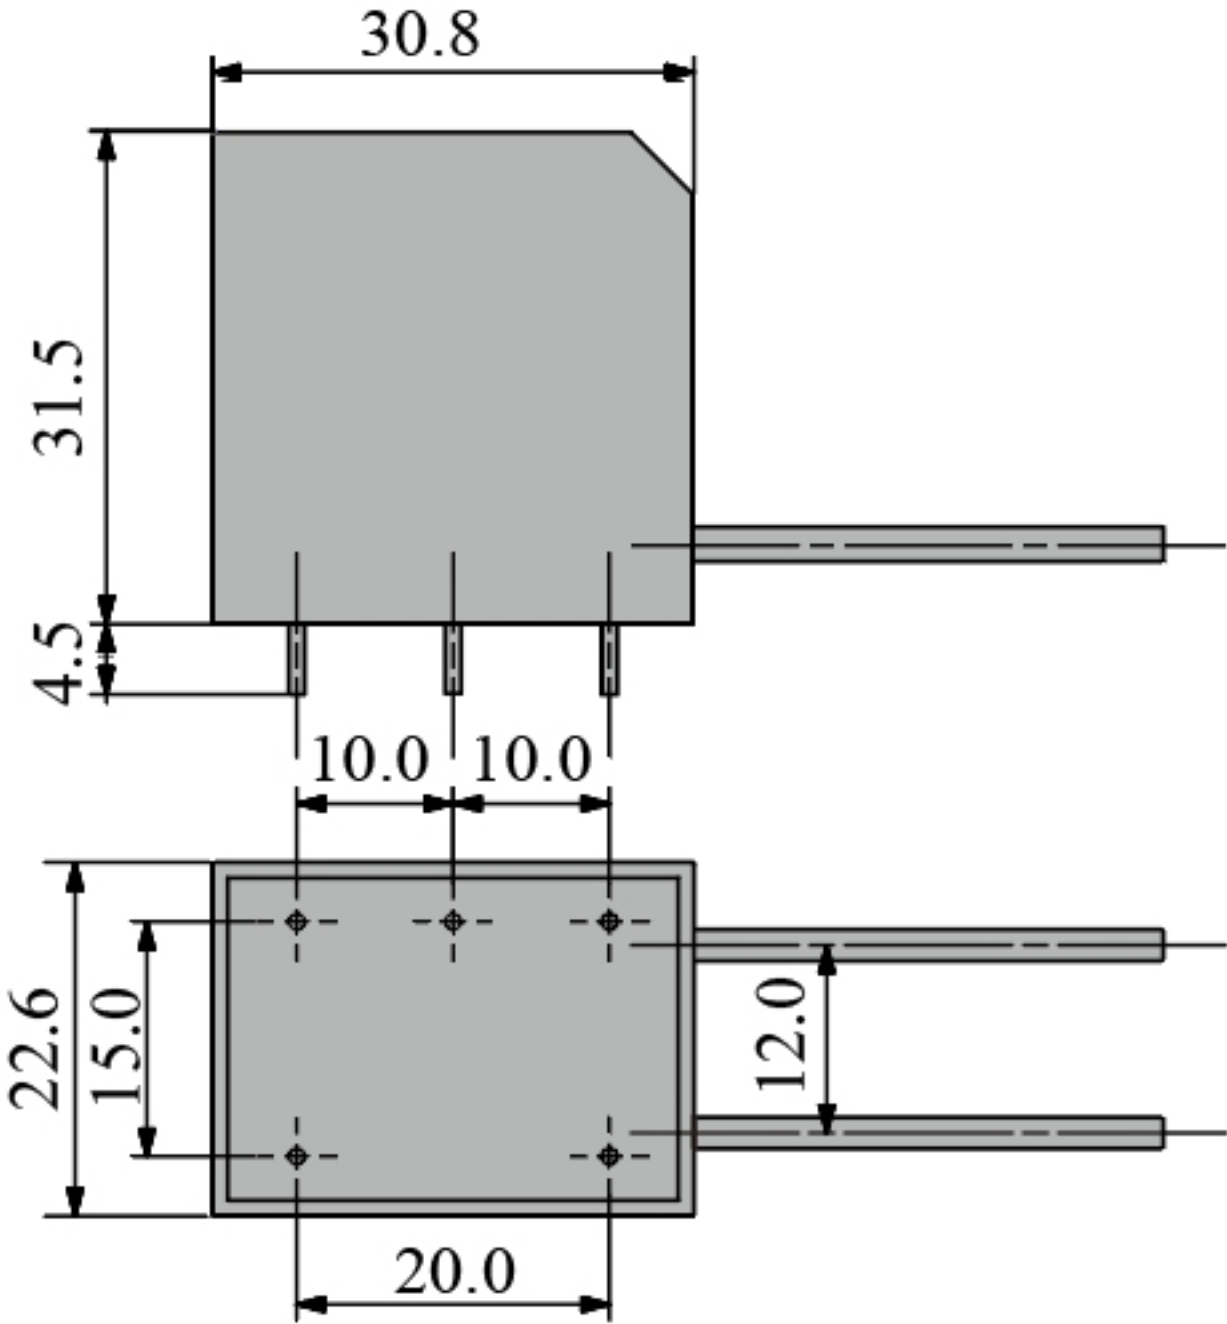MODEL NUMBER	PT291161/CT291161	
RATED INPUT	0-120V	0-220 V
RATED OUTPUT	7.07V	0.303-7.07V
OPTIMAL LOAD	-----	----
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2
DIMENSIONS	 Technical drawing of the PT291161/CT291161 device showing dimensions in millimeters. The top view shows a rectangular body with a width of 30.8 mm and a height of 31.5 mm. The bottom view shows a rectangular body with a width of 20.0 mm and a height of 22.6 mm. The distance between the two bodies is 4.5 mm. The distance between the two bodies is 10.0 mm. The distance between the two bodies is 10.0 mm. The distance between the two bodies is 12.0 mm.	