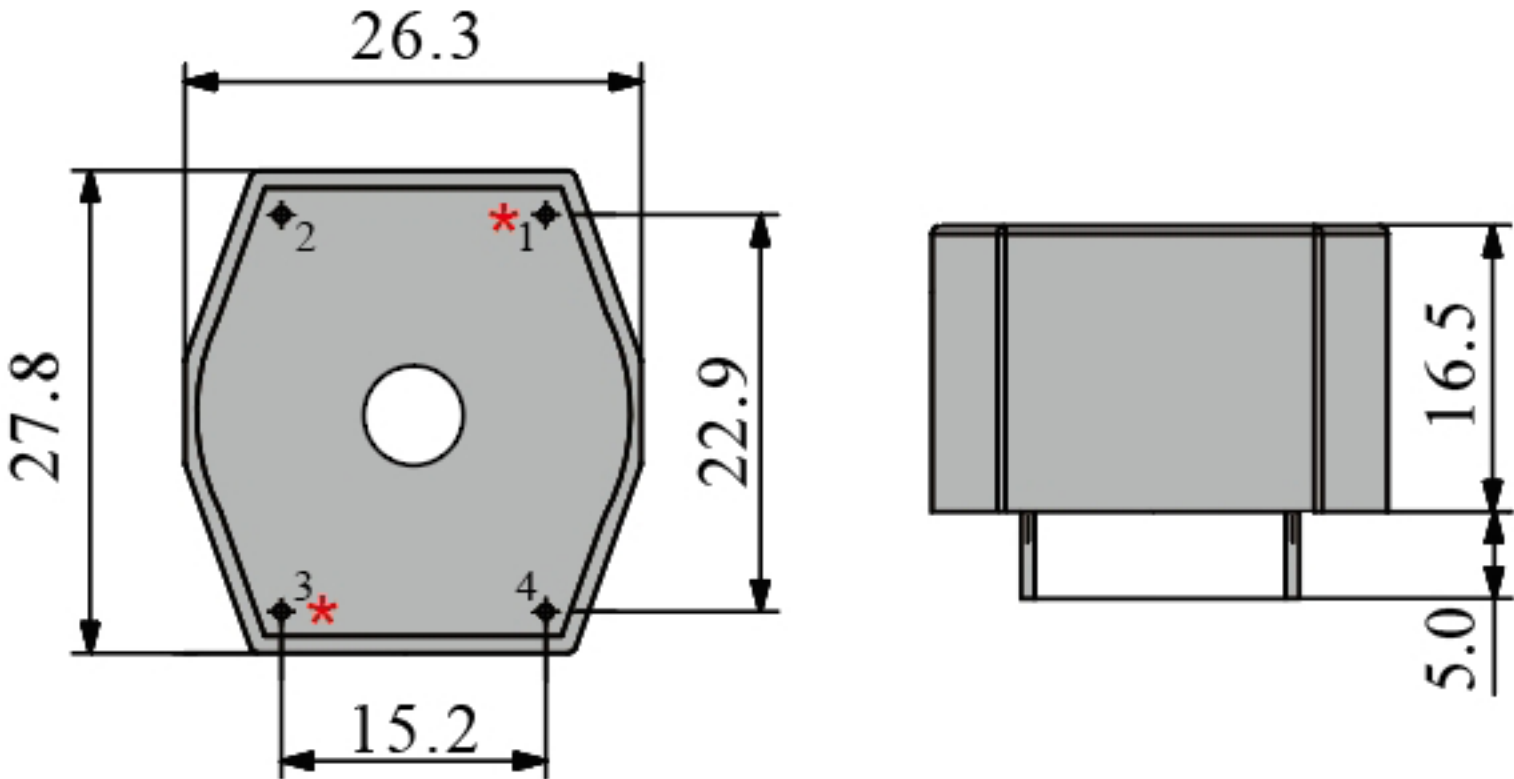
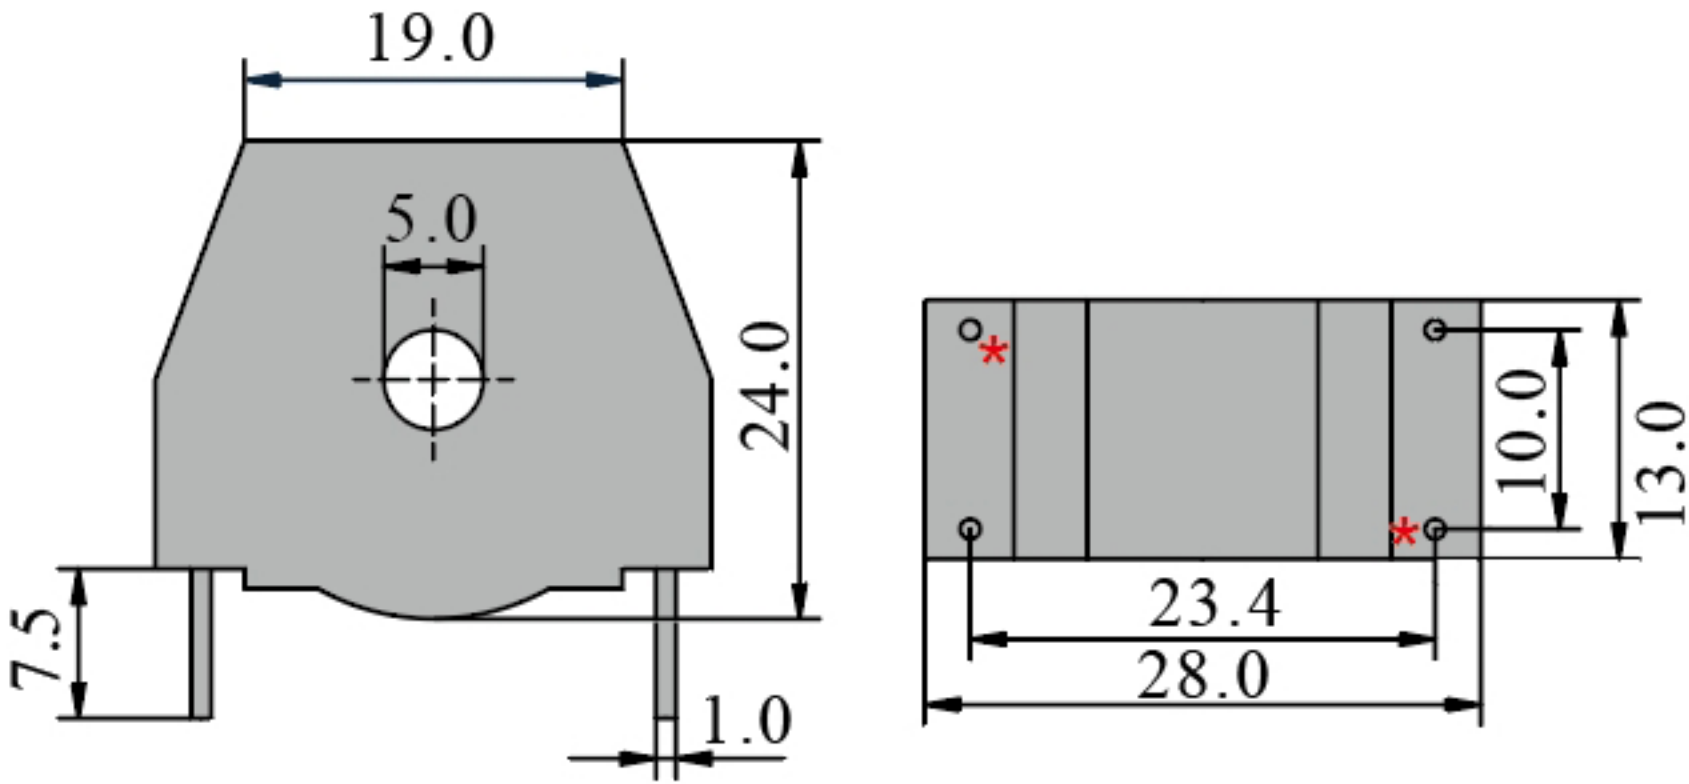
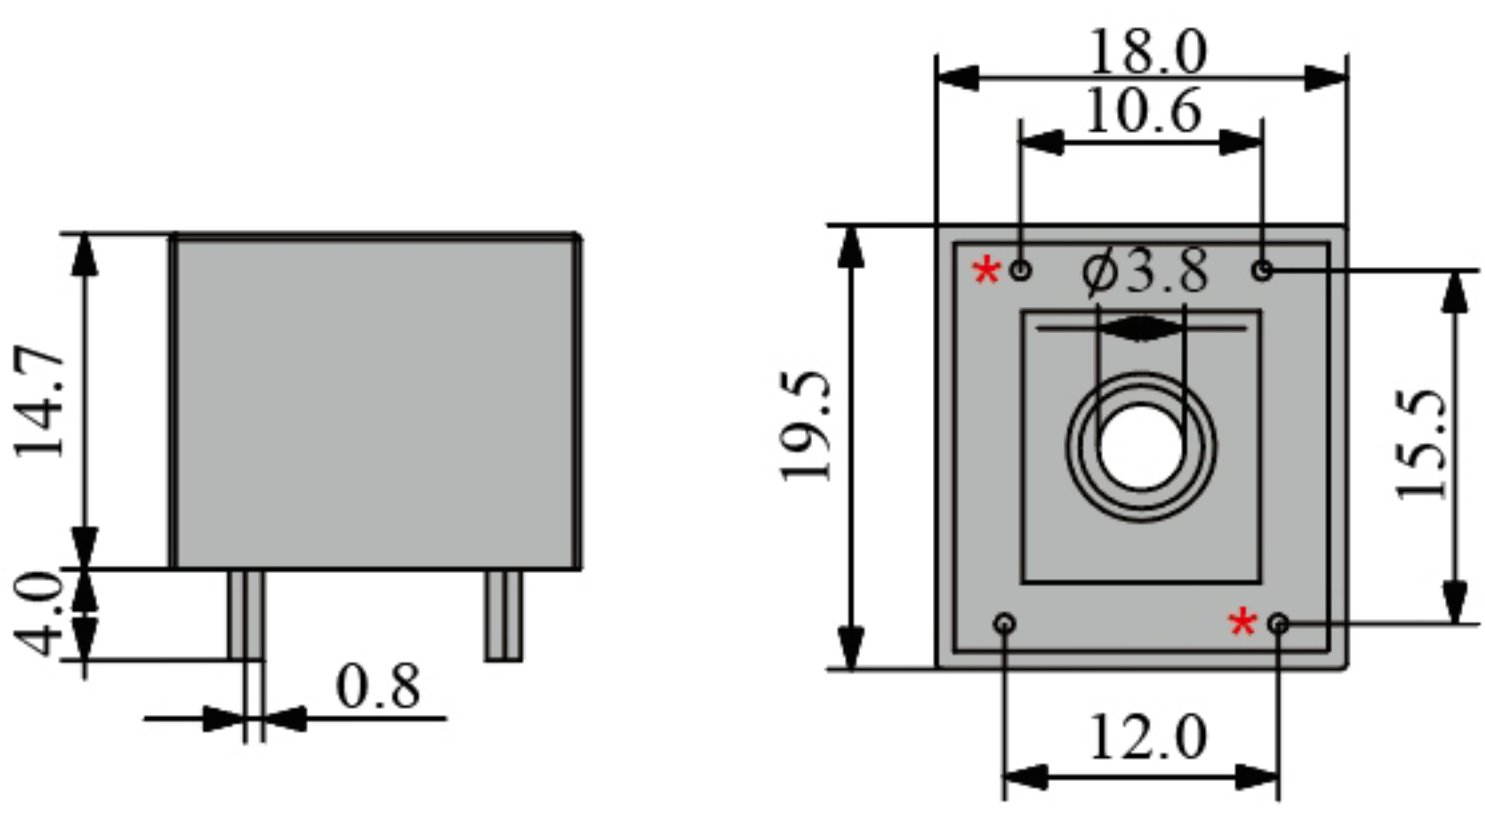
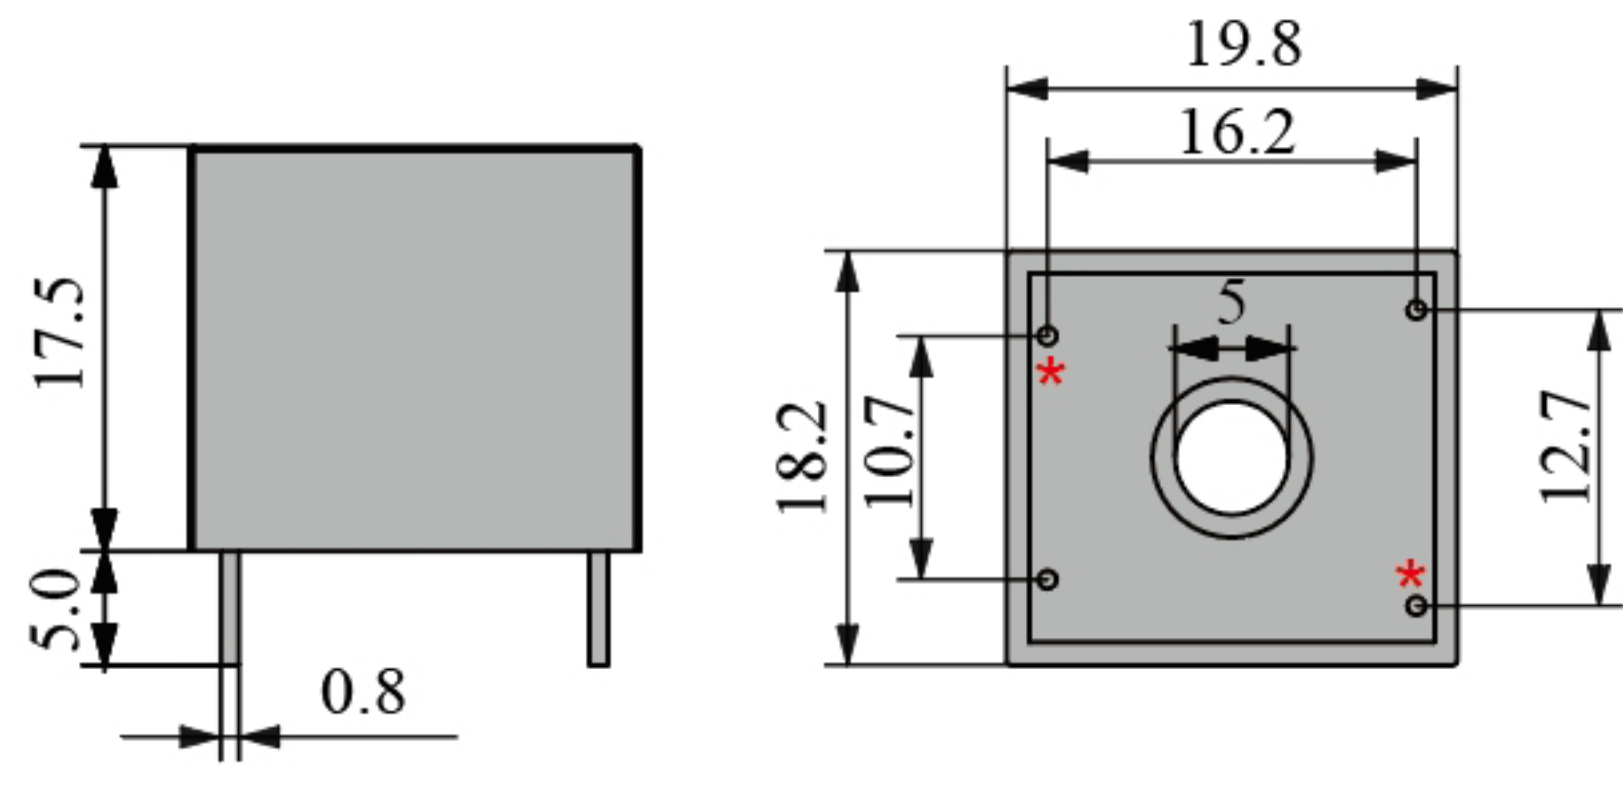


MODEL NUMBER	PT223661/CT223661				
RATED INPUT	10A	20A	30A	2mA	4mA
RATED OUTPUT	5mA	10mA	10mA	2mA	4mA
OPTIMAL LOAD	200Ω	200Ω	200Ω	500Ω	250Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2	0.1 / 0.2	0.2	0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the component. The top view shows a hexagonal shape with a central circular hole. Key dimensions include a top width of 26.3, a total height of 27.8, a bottom width of 15.2, and a distance from the top edge to the bottom of the hole of 22.9. Four points are marked on the hexagon: point 1 (top right), point 2 (top left), point 3 (bottom left), and point 4 (bottom right). Points 1 and 3 are marked with red asterisks. The side view shows a rectangular profile with a total height of 16.5 and a base thickness of 5.0.				

MODEL NUMBER	PT223761/CT223761		
RATED INPUT	10A	2mA	4mA
RATED OUTPUT	5mA	2mA	4mA
OPTIMAL LOAD	200Ω	250Ω	200Ω
ACCURACY GRADE	0.1	0.2	0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the component in two views. The top view (left) shows a trapezoidal shape with a central circular feature. Key dimensions include a top width of 19.0, a central hole diameter of 5.0, a total height of 24.0, a base width of 1.0, and a mounting tab height of 7.5. The side view (right) shows the component's profile with a total width of 28.0, a central body width of 23.4, and a total height of 13.0. Two mounting holes are indicated with red asterisks, spaced 10.0 apart.		

MODEL NUMBER	CT223361		
RATED INPUT	5A	10A	2mA
RATED OUTPUT	2.5mA	5mA	2mA
OPTIMAL LOAD	200Ω	100Ω	250Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2	0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the CT223361 component. It includes a side view on the left and a top view on the right. The side view shows a rectangular component with a height of 14.7, a base thickness of 4.0, and a base width of 0.8. The top view shows a square footprint with an outer dimension of 18.0 and an inner dimension of 10.6. The central feature is a circular hole with a diameter of 3.8. The overall height of the component is 19.5, and the height of the central area is 15.5. There are four mounting holes, each marked with a red asterisk (*), located at the corners of the inner square area.		

MODEL NUMBER	CT223461		
RATED INPUT	5A	10A	2mA
RATED OUTPUT	2.5mA	5mA	2mA
OPTIMAL LOAD	200Ω	100Ω	250Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2	0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the CT223461 component in two views: a side profile and a top-down perspective. Side View Dimensions: - Total height: 17.5 - Height of the base mounting section: 5.0 - Width of the base mounting section: 0.8 Top View Dimensions: - Overall width: 19.8 - Width of the central circular feature: 5 - Distance from the left edge to the center of the circular feature: 10.7 - Distance from the right edge to the center of the circular feature: 12.7 - Distance from the top edge to the center of the circular feature: 16.2 - Distance from the bottom edge to the center of the circular feature: 18.2 Red asterisks (*) are placed on the top view to indicate specific mounting or reference points on the component's surface.		