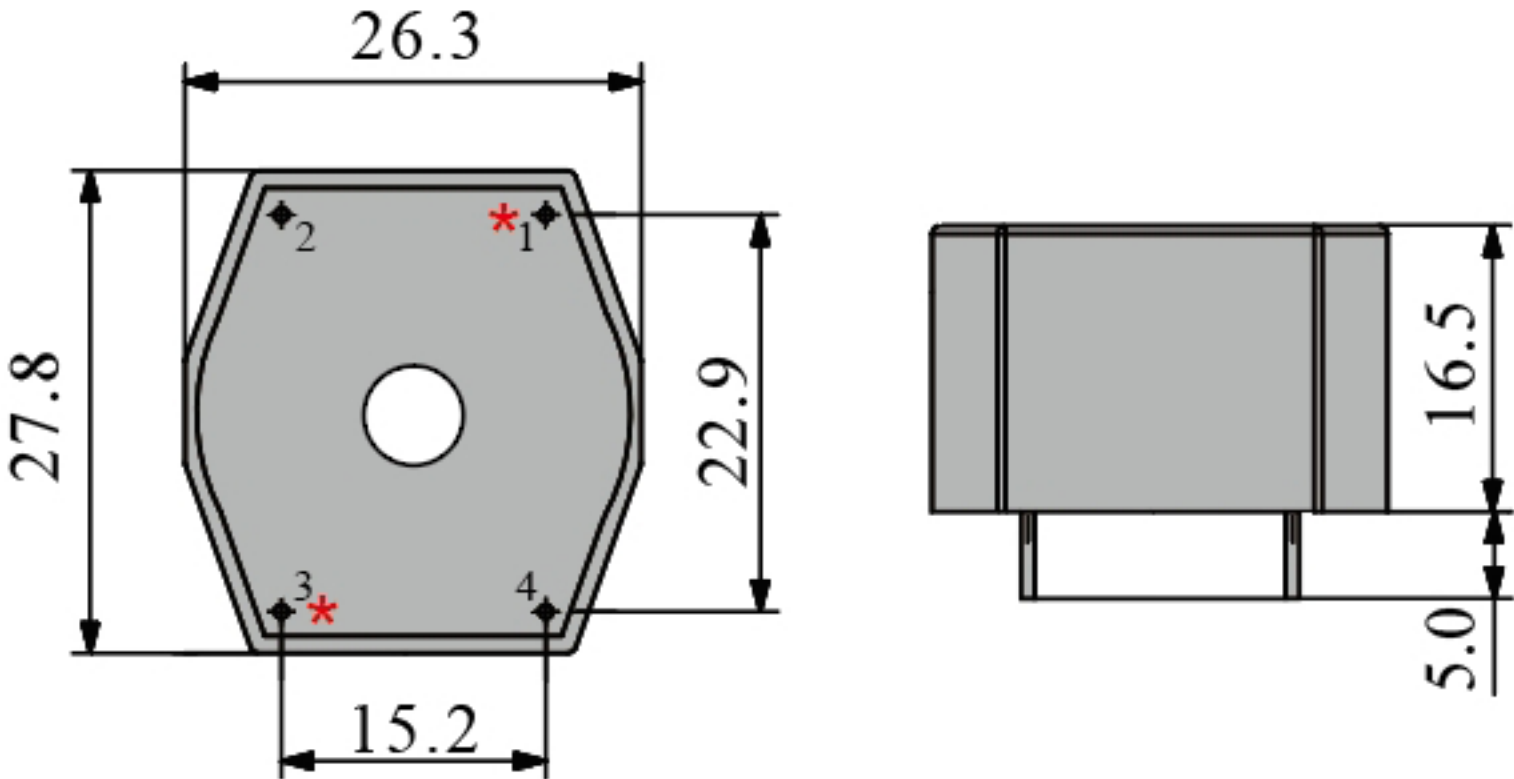
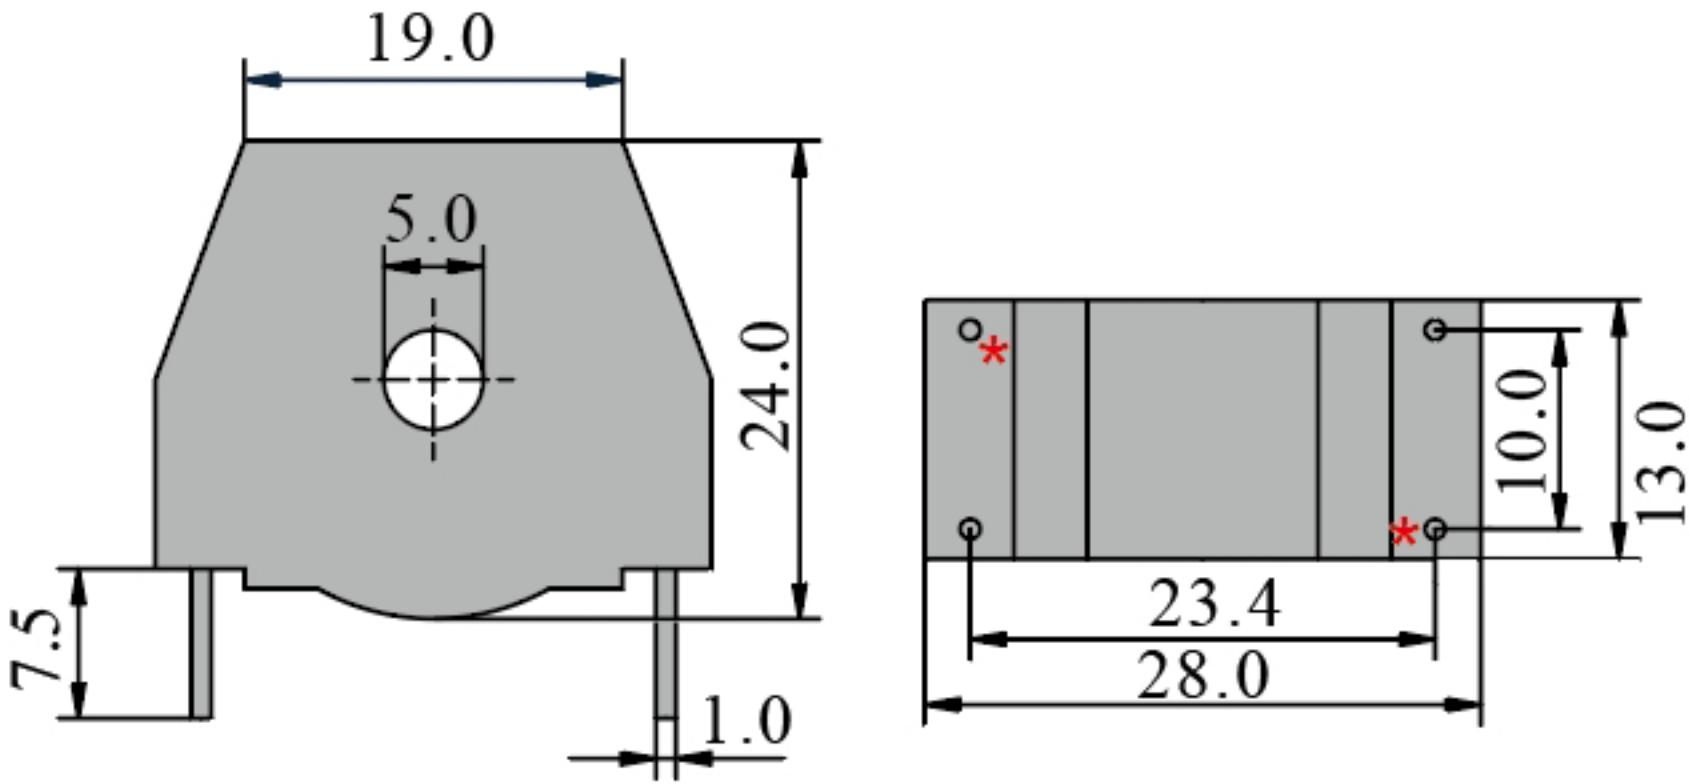


MODEL NUMBER	PT223661 / CT223661				
RATED INPUT	10A	20A	30A	2mA	4mA
RATED OUTPUT	5mA	10mA	10mA	2mA	4mA
OPTIMAL LOAD	200Ω	200Ω	200Ω	500Ω	250Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2	0.1 / 0.2	0.2	0.2
DIMENSIONS	 The technical drawing shows two views of the component. The top view is a hexagonal shape with a central circular hole. It has four numbered points (1, 2, 3, 4) at the corners, with points 1 and 3 marked with a red asterisk. Dimensions for the top view are: top width 26.3, bottom width 15.2, left height 27.8, and right height 22.9. The side view shows a rectangular component with a height of 16.5 and a base width of 5.0.				

MODEL NUMBER	PT223761/CT223761		
RATED INPUT	10A	2mA	4mA
RATED OUTPUT	5mA	2mA	4mA
OPTIMAL LOAD	200Ω	250Ω	200Ω
ACCURACY GRADE	0.1	0.2	0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the component in two views. The top view (left) shows a trapezoidal shape with a central circular feature. Key dimensions include a top width of 19.0, a central hole diameter of 5.0, a total height of 24.0, a base width of 1.0, and a mounting tab height of 7.5. The side view (right) shows the component's profile with a total width of 28.0, a central body width of 23.4, and a total height of 13.0. Two mounting holes are indicated with red asterisks, spaced 10.0 apart.		