


CT217 series products are made of flame-retardant ABS engineering plastics or PC/ABS alloy plastic materials, combined with epoxy resin casting technology, and have excellent waterproof and moisture-proof properties. Made of nanocrystalline soft magnetic materials or silicon steel materials, they have high precision, good linearity, compact structure, small size, easy installation, and are widely used in power distribution systems. The product can be output by terminals or directly by wires, and RVVP wire can be used as needed to improve anti-interference ability.

- Large varieties, and wide current range.
- Two mounting methods, reliable and flexible.
- Flexible design, measurable and protective dual.
- High precision: the precision can reach 0.1 level
- High overload multiple, small signal output up to 12 times
- Strong versatility and good interchangeability

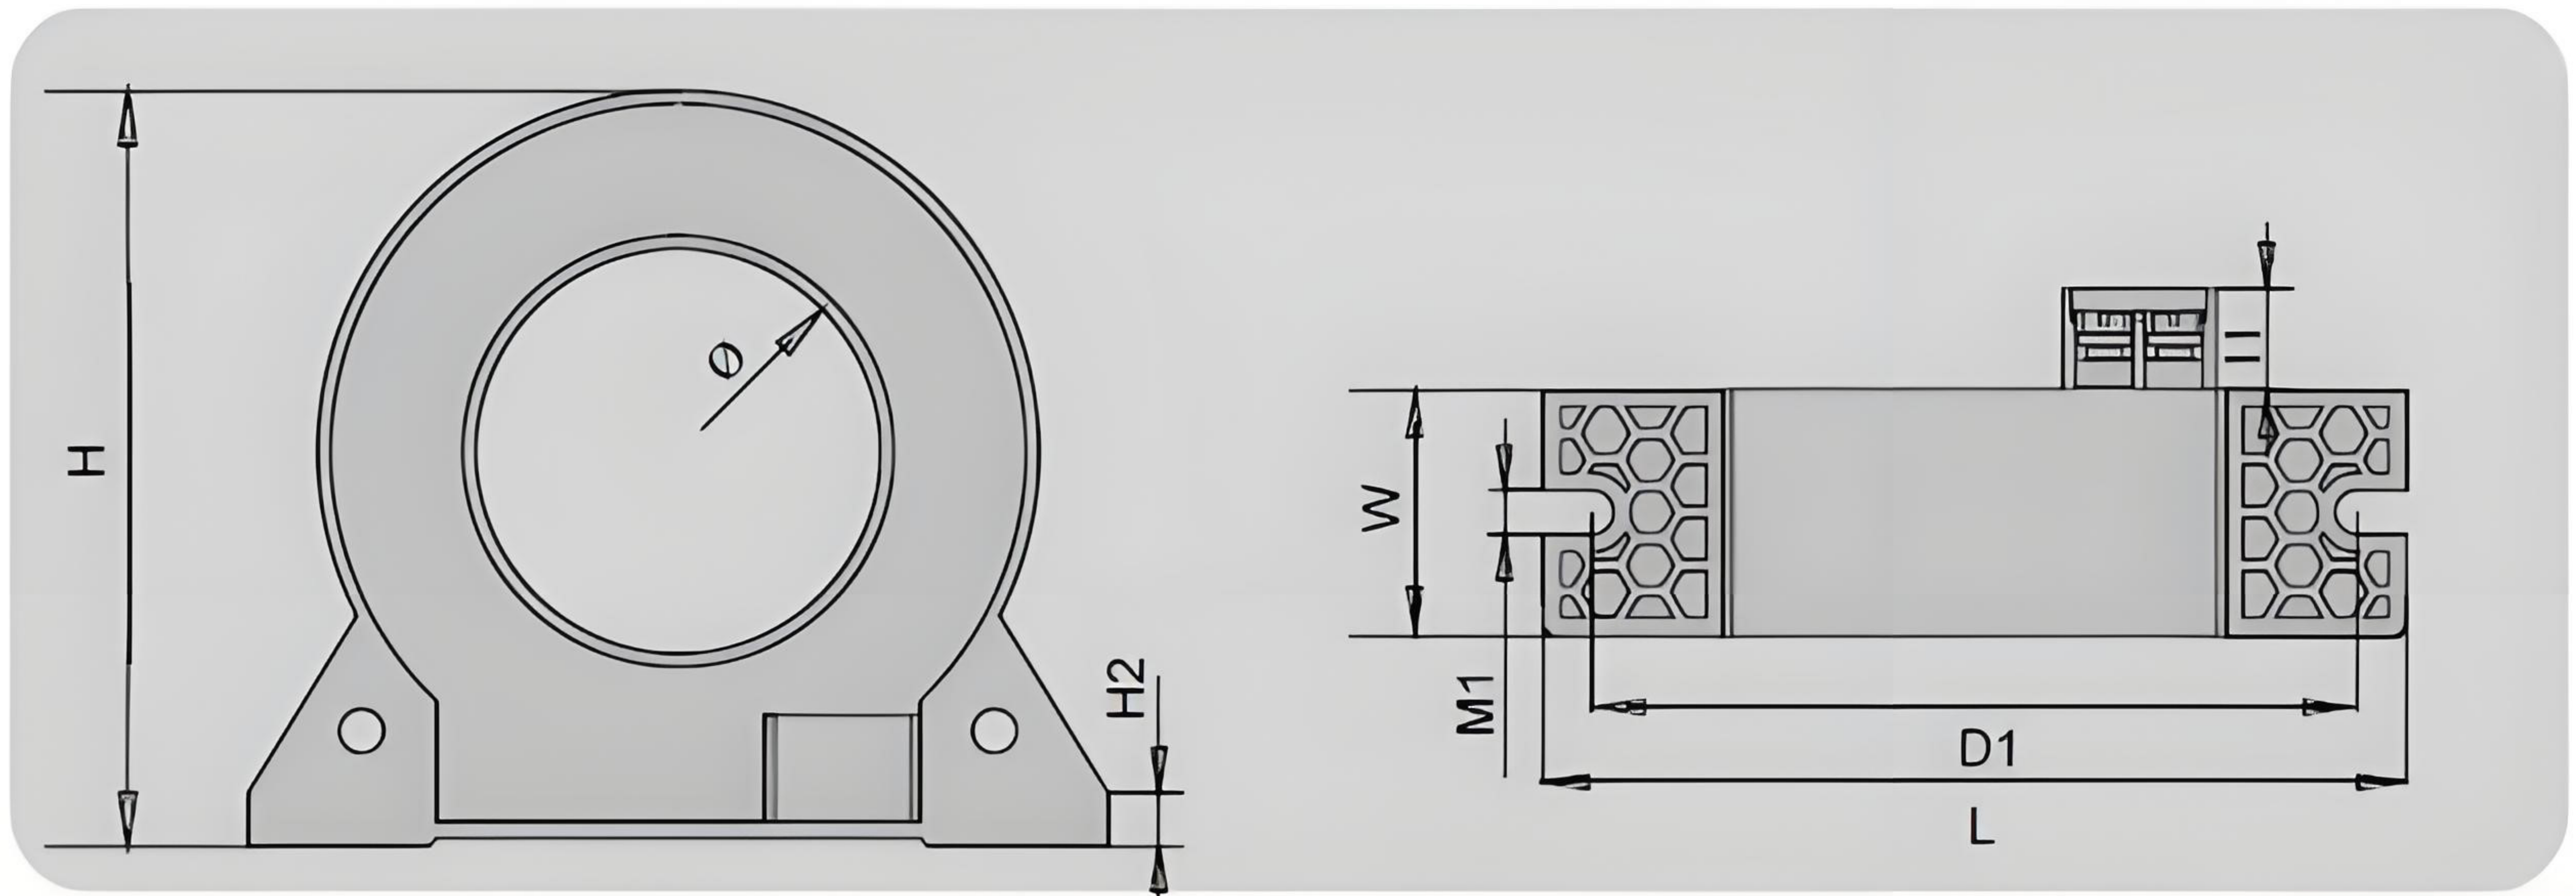

MODEL NUMBER	TYPICAL SPECIFICATINOS		ACCURACY	OVER LOAD	DIMENSIONS						
					Ø	L	W	H	D1	M1	H2
CT217102 CT217103	50A/20mA	RL=20Ω	0.1	1.2	30	76	25	67	69	5	6
	100A/50mA	RL=20Ω	0.1	1.2							
	200A/50mA	RL=20Ω	0.1	1.2							
CT217202 CT217203	100A/50mA	RL=20Ω	0.1	1.2	46	98	28	86	87	5	6
	200A/50mA	RL=20Ω	0.1	1.2							
	400A/200mA	RL=20Ω	0.1	1.2							
CT217302 CT217303	200A/50mA	RL=20Ω	0.1	1.2	65	124	28	105	110	6	6
	400A/200mA	RL=20Ω	0.1	1.2							
	600A/200mA	RL=20Ω	0.1	1.2							
CT217402 CT217403	200A/50mA	RL=20Ω	0.1	1.2	80	140	32	130	122	6	8
	500A/200mA	RL=20Ω	0.1	1.2							
	1000A/1A	RL=5Ω	0.5	1.2							
CT217502 CT217503	500A/1A	RL=5Ω	0.5	1.2	100	167	32	148	153	6	8
	1000A/1A	RL=5Ω	0.5	1.2							
	1500A/1A	RL=5Ω	0.5	1.2							
CT217602 CT217603	1000A/1A	RL=5Ω	0.5	1.2	120	188	32	172	170	6	8
	1500A/1A	RL=5Ω	0.5	1.2							
	3000A/1A	RL=20Ω	0.5	1.2							
CT217702 CT217703	1500A/1A	RL=20Ω	0.5	1.2	150	225	32	206	205	6	10
	3000A/1A	RL=20Ω	0.5	1.2							
	4000A/1A	RL=20Ω	0.5	1.2							
CT217802 CT217803	2000A/1A	RL=20Ω	0.5	1.2	200	296	40	274	278	6	12
	4000A/1A	RL=20Ω	0.5	1.2							
	6000A/1A	RL=20Ω	0.5	1.2							