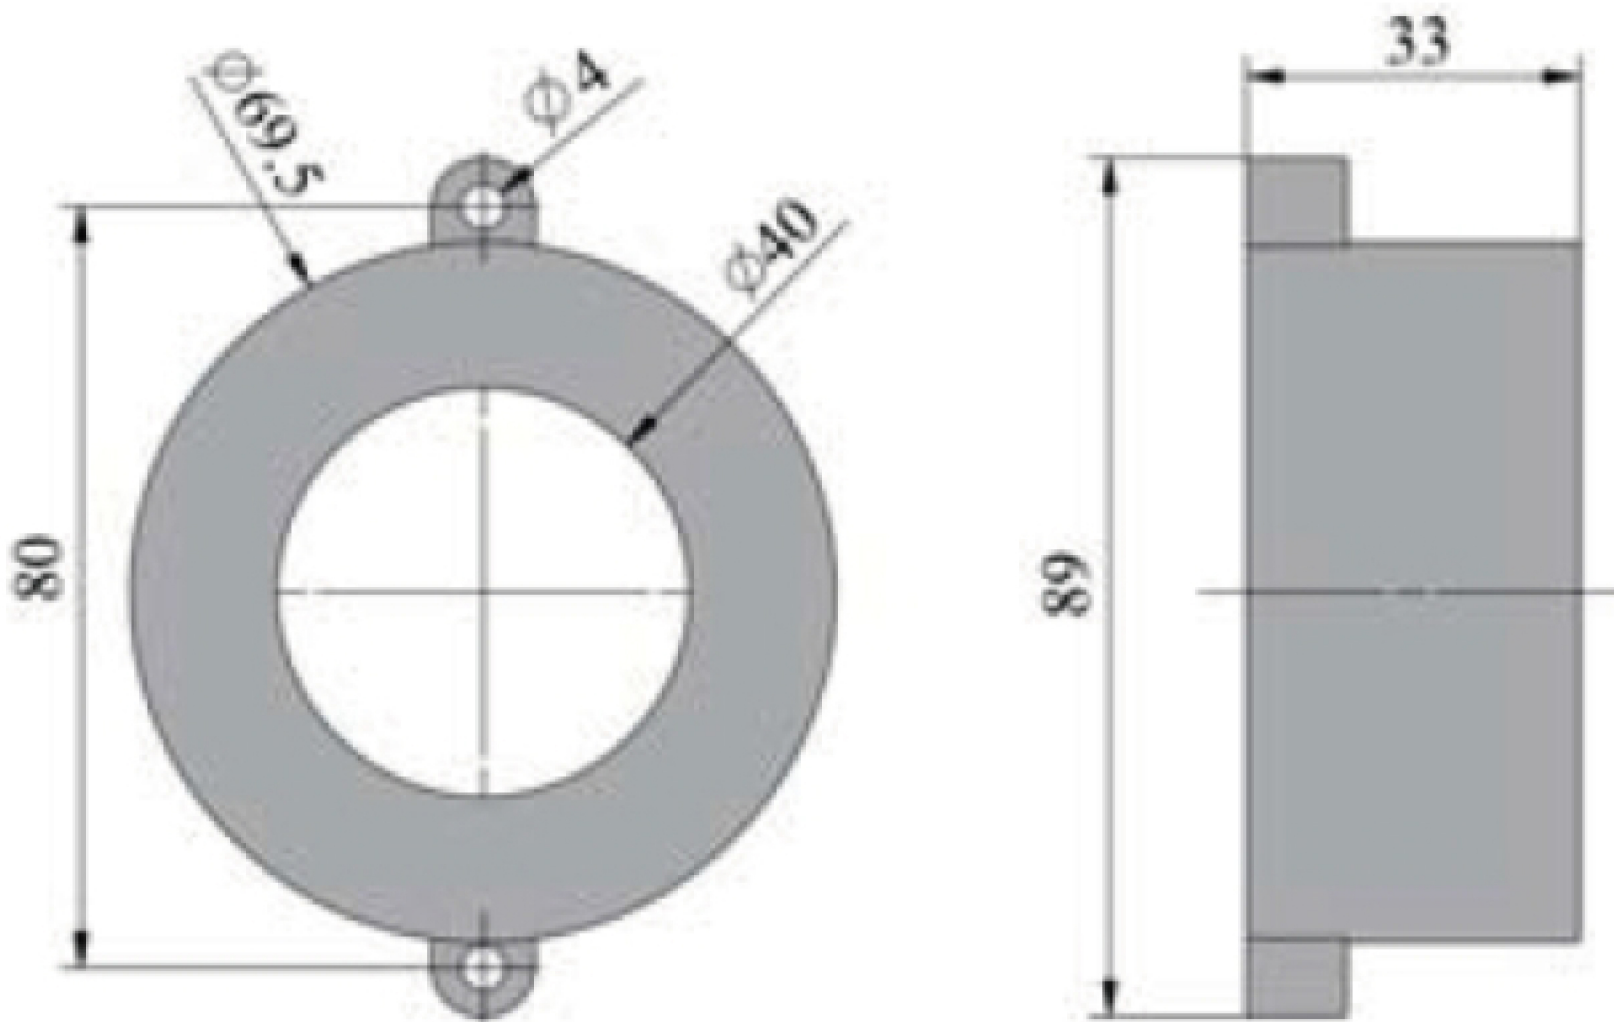


MODEL	CT572822				
RATED INPUT	10A	10A	20A	30A	40A
RATED OUTPUT	5mA	10mA	10mA	20mA	20mA
OPTIMAL LOAD	200Ω	100Ω	200Ω	100Ω	200Ω
ACCURACY	0.1	0.1	0.1	0.1	0.1
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the CT572822 component. The front view (left) shows a circular ring with an outer diameter of 80, an inner diameter of 40, and a ring thickness of 69.5. Two mounting tabs are positioned at the top and bottom, each featuring a central hole with a diameter of 4. The side view (right) shows the component's profile with a total height of 89 and a width of 33.				