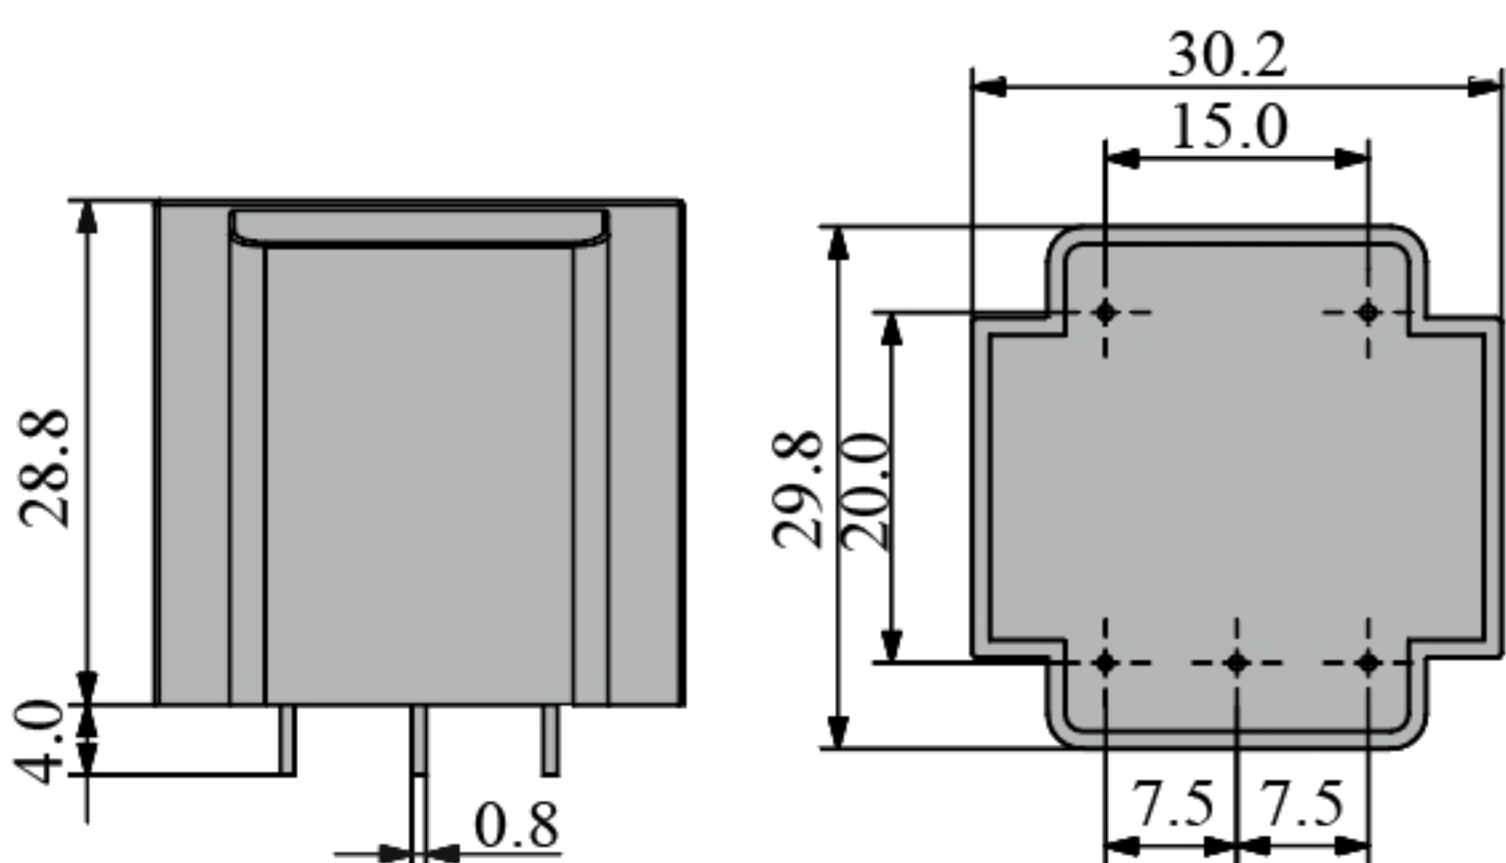
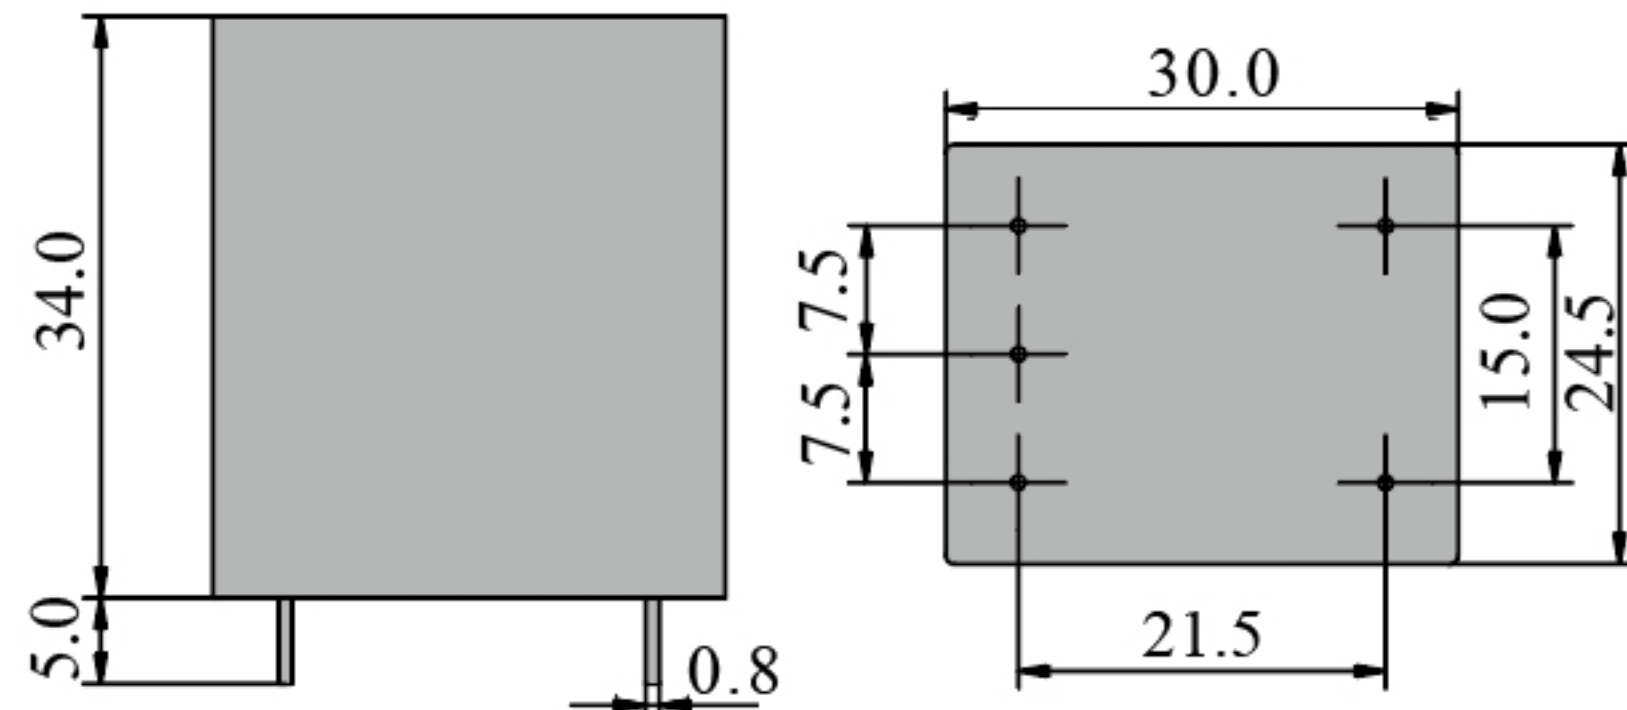
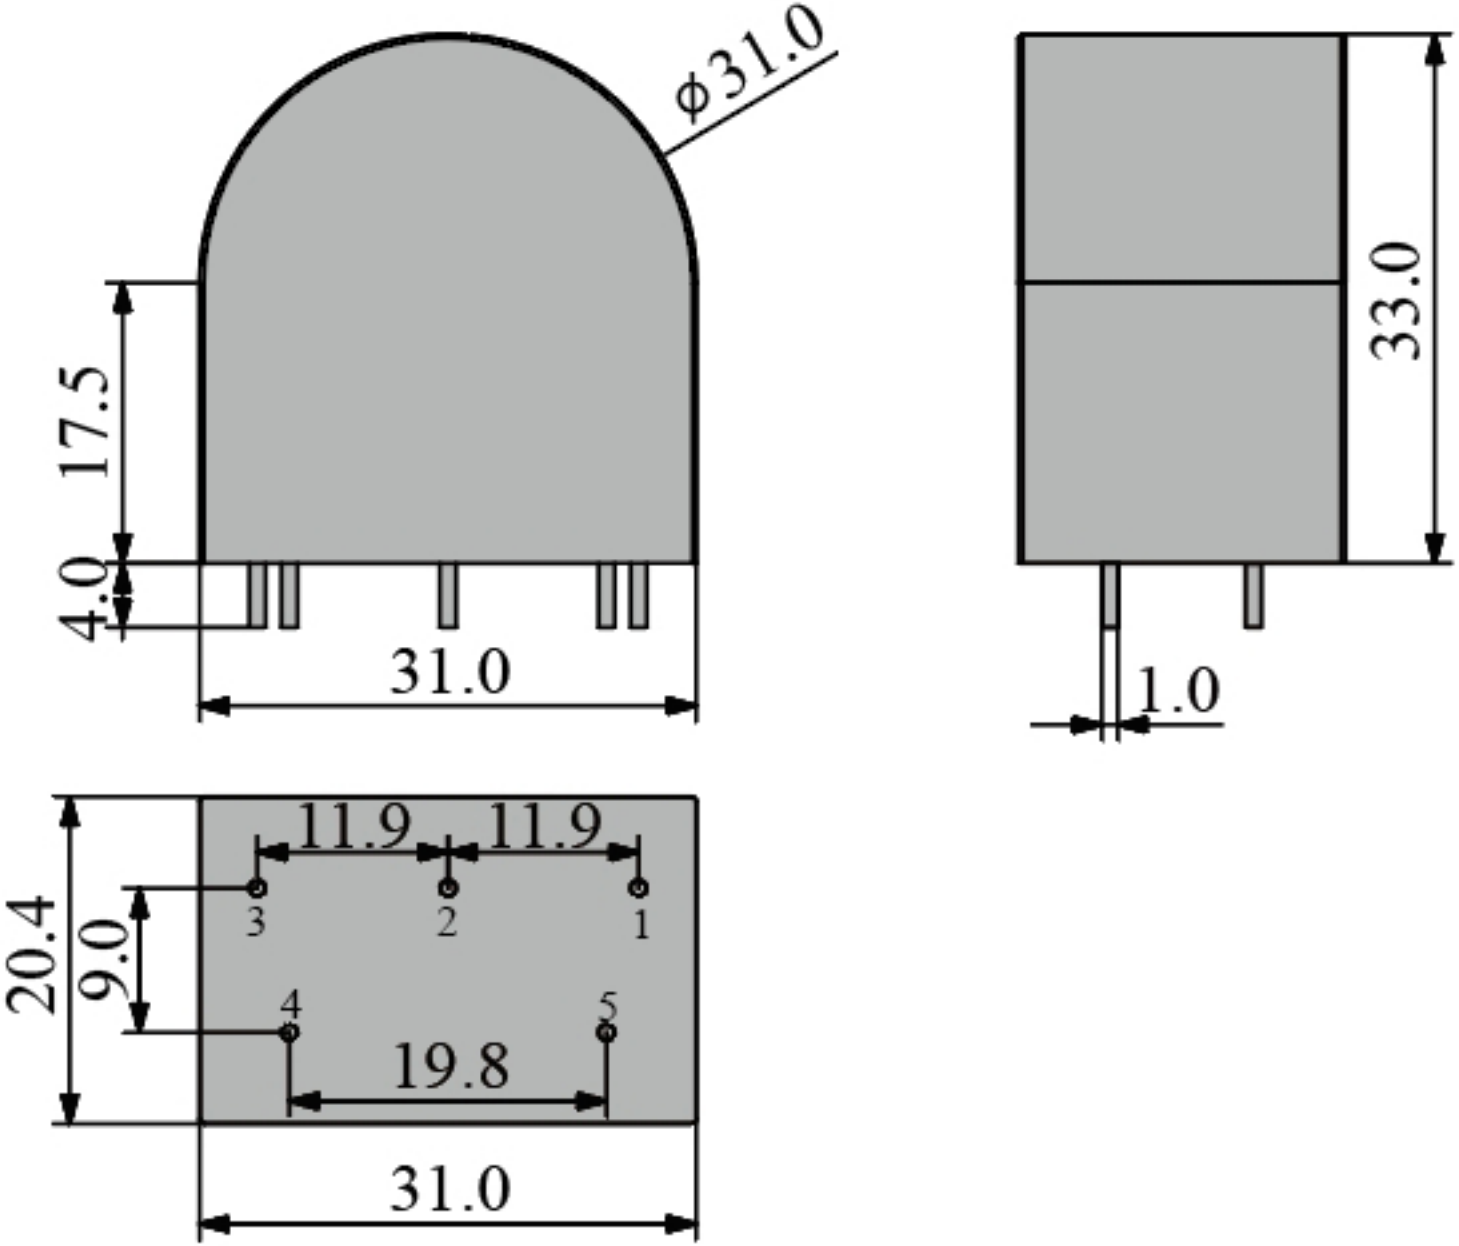
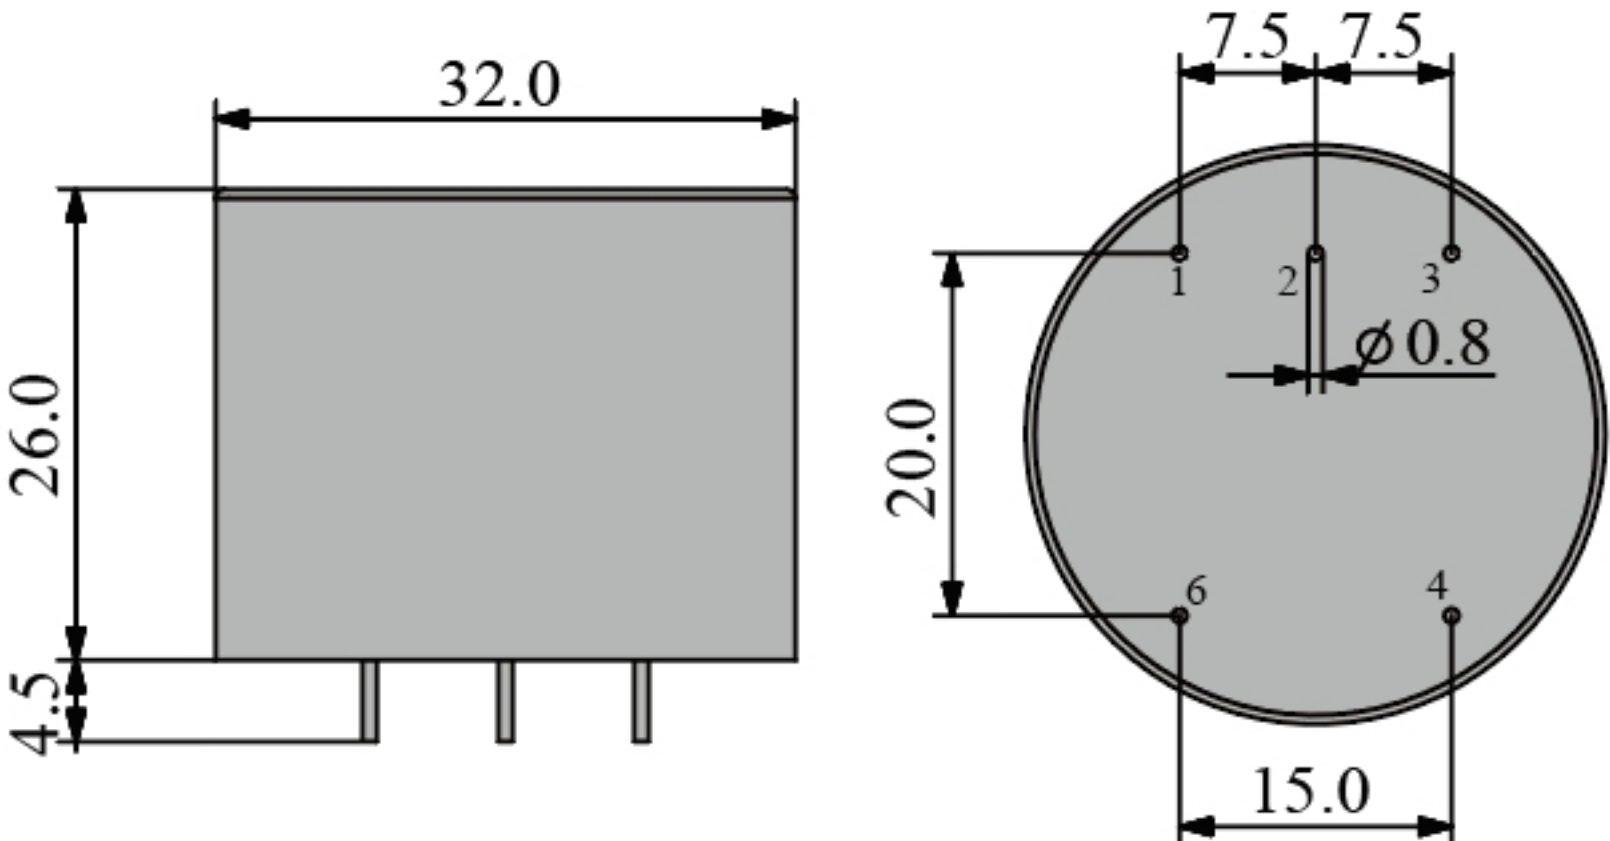


产品型号	PT291261/CT291261	
额定输入	0-120V	0-450 V
额定输出	7.07V	7.07V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the transformer in two views. The front view (left) shows a rectangular core with a height of 28.8mm and a base width of 4.0mm. The central winding area has a width of 0.8mm. The top view (right) shows a square-like footprint with an overall width of 30.2mm and a height of 29.8mm. The central square area has a side length of 15.0mm. The distance from the center to the bottom edge is 20.0mm, and the distance from the center to the side edges is 7.5mm.	

产品型号	PT290661/CT290661	
额定输入	0-20A	0-250 V
额定输出	3.53V	3.53V
推荐负载	>100K	>100K
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing shows two views of the module. The front view (left) is a rectangle with a height of 34.0 and a base width of 5.0. A small protrusion on the right side has a width of 0.8. The top view (right) is a rectangle with a width of 30.0 and a depth of 24.5. It shows four mounting holes arranged in a 2x2 grid. The distance between the centers of the holes horizontally is 21.5, and vertically is 15.0. The distance from the top edge to the center of the top holes is 7.5, and from the bottom edge to the center of the bottom holes is 7.5.	

产品型号	PT290791/CT290791	
额定输入	0-100A	0-150 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸		

产品型号	PT290861/CT290861	
额定输入	0-100A	0-220 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the sensor. The front view (left) shows a rectangular component with a width of 32.0 and a height of 26.0. A base flange with a thickness of 4.5 is visible at the bottom. The top view (right) shows a circular footprint with an outer diameter of 20.0 and an inner circular feature with a diameter of 15.0. Six mounting holes are arranged in a circular pattern, with three holes on each side of the center. The distance between the centers of adjacent holes is 7.5. The diameter of each hole is 0.8.	