





型号	变比规格	额定负载	精度等级	过载倍数	输出方式
CT 380102	5A/2.5mA	RL=20Ω	0.5	10/12	引线输出 端子输出
	10A/5mA	RL=20Ω	0.5	10/12	
	15A/10mA	RL=20Ω	0.5	10/12	
	20A/10mA	RL=20Ω	0.5	10/12	
	25A/10mA	RL=20Ω	0.5	10/12	
CT 380202	5A/2.5mA	RL=20Ω	0.5	10/12	引线输出 端子输出
	10A/5mA	RL=20Ω	0.5	10/12	
	15A/10mA	RL=20Ω	0.5	10/12	
	20A/10mA	RL=20Ω	0.5	10/12	
	25A/10mA	RL=20Ω	0.5	10/12	
CT 380402	25A/50mA	RL=10Ω	0.5	10/12	引线输出 端子输出
	50A/50mA	RL=10Ω	0.5	10/12	
	75A/50mA	RL=10Ω	0.5	10/12	
	100A/50mA	RL=10Ω	0.5	10/12	
	150A/50mA	RL=10Ω	0.5	10/12	
CT 380602	100A/50mA	RL=10Ω	0.5	10/12	引线输出 端子输出
	200A/50mA	RL=10Ω	0.5	10/12	
	250A/50mA	RL=10Ω	0.5	10/12	
	300A/50mA	RL=10Ω	0.5	10/12	
	400A/50mA	RL=10Ω	0.5	10/12	


CT380102

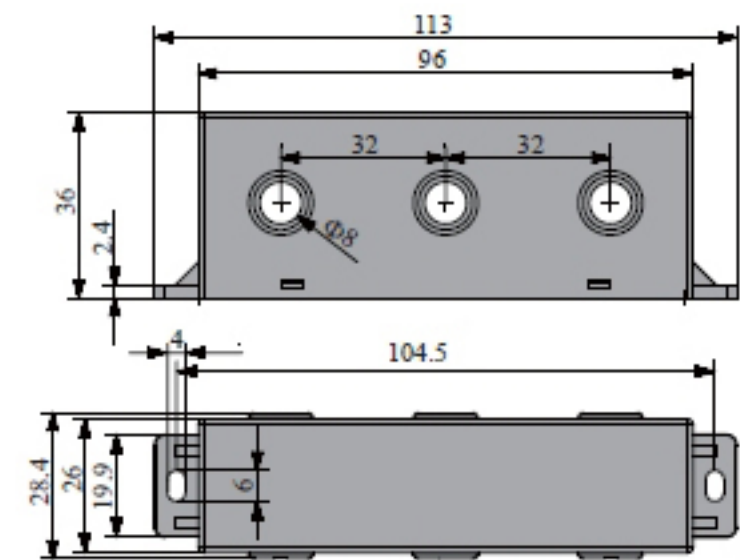


CT380202

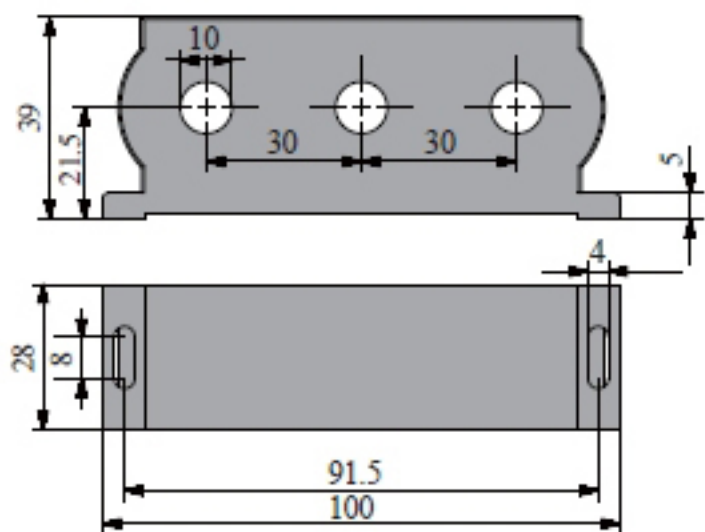

CT380402

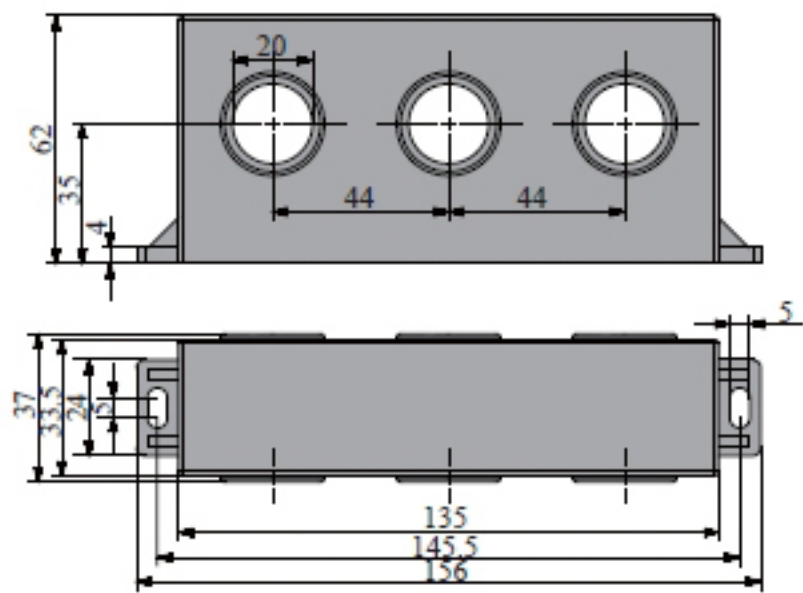

CT380602

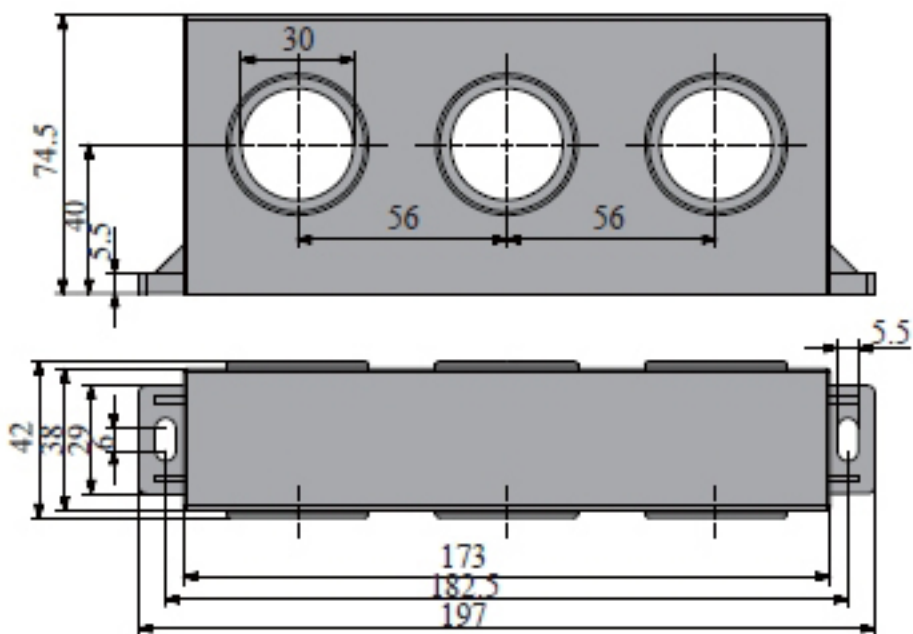

产品系列	CT380362系列	CT380862系列
输入电流	25A / 50A / 100A	20A / 50A / 100A / 200A / 250A
常规变比	1: 2000 1:3000	1:1000 1: 2000 1:3000
过载倍数	5倍 / 8倍 /10倍 /12倍	8倍 /10倍
精度等级	0.2 / 0.5	0.2 / 0.5
外形尺寸		



产品系列	CT380562系列	CT380762系列
输入电流	25A / 50A /100A	25A / 50A /100A
常规变比	1: 2000 1:3000 1:4000	1: 2000 1:3000
过载倍数	8倍 /10倍 /12倍	5倍 / 8倍 /10倍
精度等级	0.2 / 0.5	0.2 / 0.5
外形尺寸		